



Powered by the exclusive *iQ* Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; external blowers offered separately.

LED lighting has an extremely long lifespan; lamps may never need replacement.

Perimeter aspiration provides highly effective smoke and steam removal.

Quick release, mesh dishwasher safe grease filters ensure a clean, fresh kitchen.

Works with optional Universal Make-Up Air Dampers.

#### Model Numbers:

WC46IQ90SB

WC46IQ42SB

WC46E90SB

WC46E42SB



Perimeter panel provides clean appearance and hides grease filter.



Three-speed plus boost electronic pushbutton controls include 10-minute delay-off and filter clean reminder.



LED lighting produces beautiful bright, clean light using minimal energy.



### Hood Sizes

<b>Widths</b>	<b>35-7/16" (90cm), 42"</b>
<b>Depth</b>	<b>17-3/4"</b>

### Finish

Stocked	Brushed Stainless Steel
Special Order	Not Available

### Features

Lighting Type	LED 6-watts
Number of Lamps	2
Lighting Levels	1
Lighting Lamps Included	Yes
Control Type	3-speed Plus Boost Electronic Pushbutton with Display
Control Features	Heat Sentry™, Delay Off, Filter Clean Reminder
Remote Control	Not Available
Filter Type	Mesh grease Filters with Perimeter Aspiration
Non-ducted Capability	Yes

### Hood Blower Included (WC46IQ)

<b>Internal</b>	<b>iQ6</b>
Blower CFM	600
Sones Low/High	0.3/7.5

### Hood Blower Options (WC46E blowers sold separately)


<b>External In-line</b>	<b>ILB3</b>	<b>ILB6</b>	<b>ILB9</b>	<b>ILB11</b>
Max CFM	280	600	800	1100
Some levels are typically half of comparable CFM internal blowers.				
<b>External Exterior</b>	<b>EB6</b>	<b>EB9</b>	<b>EB12</b>	<b>EB15</b>
Max CFM	600	900	1200	1500
Some levels are typically half of comparable CFM internal blowers.				

### Accessories

10'-11' Flue Extension (Ducted)	AEWC345IQSB
10'-11' Flue Extension (Non-ducted)	AEWC345IQSBN
Non-Duct Kit	ANKWC46
Non-Duct Filter	AFCWC46
Universal MUA Damper	MD6TU, MD8TU, MD10TU

### Installation Requirements

Amps @ 120V: Internal Blower	4.0
Amps @ 120V: External Blower	7.0 Max
Electrical Connection	Plug In
Duct Size: Internal Blower	8"
Duct Size: External Blower	8" at hood (Transition to 10" typical, see pages 64-65)
Duct Direction	Vertical
Backdraft Damper	Included

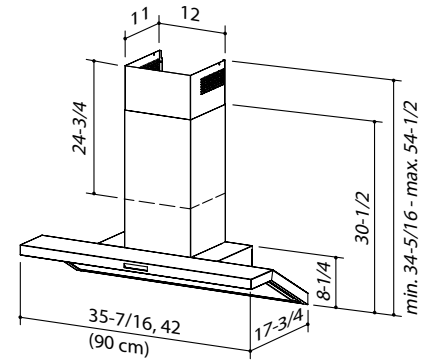

Installation height above the cooking surface: 24"-30"

Telescopic flue for 8'-9" ceiling is standard. Optional flue extensions for 10'-11" ceiling

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)