

WARMING DRAWER 30-INCH TRADITIONAL

WD30JS / WD30JP

INSTALLATION OPTIONS

WALL-MOUNTED INSTALLATION


Thermador Warming Drawers may be installed below any Thermador Single or Double Built-in Oven. A minimum space of 1" is recommended between the bottom of the oven and the top of the warming drawer. Refer to the built-in oven section for additional details.

UNDER-COUNTER INSTALLATION

Thermador Warming Drawers may also be installed below any Thermador Electric or Non-professional Gas Cooktop as long as there is no contact between the bottom of the cooktop and the top of the warming drawer. When installing below a Thermador Induction Cooktop, a minimum 1" air gap must be maintained between the bottom of the cooktop and the top of the warming drawer. When installing below a Thermador Professional Rangetop, a minimum 2 3/4" air gap must be maintained between the bottom of the cooktop and the top of the warming drawer. Refer to the appropriate cooktop or rangetop section for additional details.

The cabinet base must be flat and capable of supporting a weight of at least 110 lbs. (50 kg).

30-INCH TRADITIONAL WARMING DRAWER AND CUTOUT DIMENSIONS

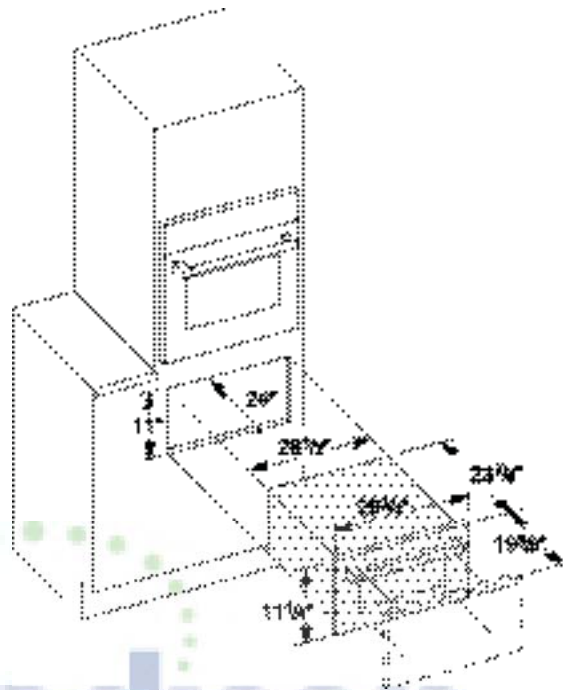

Door Handle Depth*

Masterpiece
Handle



* Protrusion of handle from outer part of drawer front. Does not include thickness of drawer front.