Be instantaneous!

Brisas BML island

Brisas BML can be installed in as little as 20 minutes. Designed with our unique 3-three step installation system, Brisas BML breaks the arduous task of installing the entire range hood into 3 easy steps. We've even added an installation template to help you align your ceiling marks without the guesswork. One look at the classic European design and gentle clear-glass curved canopy will have you sold. Love at first sight? Yes. It's possible.


FEATURES OF HIGH QUALITY

- Available in 36"
- Available with 600-cfm or 290-cfm internally installed motor
- Stainless steel 3-speed mechanical controls
- Sturdy stainless steel construction
- $\bullet\, \mathsf{Durable}, \mathsf{washable}\, \mathsf{5}\text{-}\mathsf{ply}\, \mathsf{aluminum}\, \mathsf{mesh}\, \mathsf{filters}$
- Optional recirculation kit
- Standard telescopic duct covers up to 9' ceilings
- Optional duct cover extensions for up to 12' ceilings
- $\bullet \, \mathsf{Designed} \, \mathsf{for} \, \mathsf{6}\text{-}\mathsf{inch} \, \mathsf{vertical} \, \mathsf{ducted} \, \mathsf{installations}$





Brisas BML island

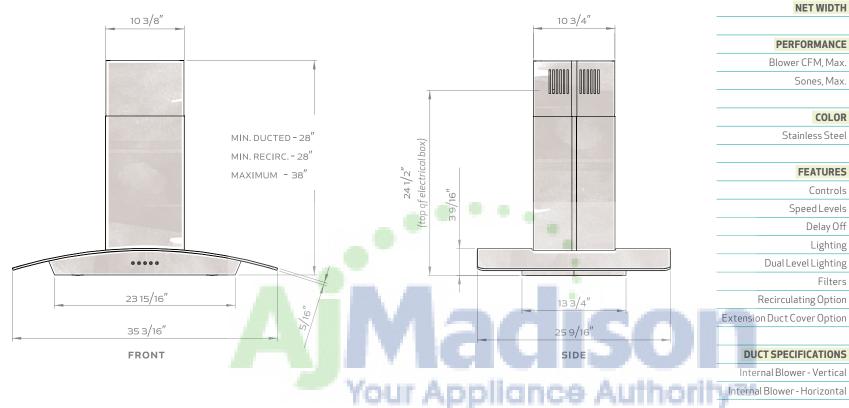

	BML-E36AG/BML-E36AG290				
SIZE	36"				
NET WIDTH	35-3/16"				
PERFORMANCE					
Blower CFM, Max.	600 / 290				
Sones, Max.	6 / 2.8				
COLOR					
Stainless Steel	SS + Glass				
FEATURES					
Controls	Mechanical Push Button				
Speed Levels	3				
Delay Off	No				
Lighting	Halogen, 50W x2				
Dual Level Lighting	No				
Filters	Aluminum Mesh				
Recirculating Option	Yes				
Extension Duct Cover Option	Yes, Up to 12' Ceiling				
DUCT SPECIFICATIONS					
Internal Blower - Vertical	6" round				
Internal Blower - Horizontal	NA				

570-335

OPTIONAL ACCESSORIES	
Recirculating Kit	BRC-0004
Extension Duct Cover	B1C-00ML
MOUNTING HEIGHT*	26"-34"

120V - 60Hz

400W, 3.5A / 170W, 1.5A

AC INPUT

AC POWER

Φ ⁶ 6 8"	U	115/8"
8 3/4" 0 0	Å V	
23/4"	43/8"	
c/L		
TOP		

	CEILING HEIGHT	8′	8.5'	9′	9.5′	10′	10.
STANDARD	Ducted Mounting Height*	26"-32"	28"-34"	34"-34"	N/A	N/A	N/
DUCT COVER	Recirc. Mounting Height*	26"-32"	28"-34"	34"-34"	N/A	N/A	N/
EXTENSION	Ducted Mounting Height*	N/A	N/A	N/A	26"-30"	26"-34"	26"-
DUCT COVER	Recirc. Mounting Height*	N/A	N/A	N/A	26"-30"	26"-34"	26"-

CEILING HEIGHT	0	0.5	9	9.5	10	10.5	11	12
Ducted Mounting Height*	26"-32"	28"-34"	34"-34"	N/A	N/A	N/A	N/A	N/A
Recirc. Mounting Height*	26"-32"	28"-34"	34"-34"	N/A	N/A	N/A	N/A	N/A
Ducted Mounting Height*	N/A	N/A	N/A	26"-30"	26"-34"	26"-34"	26"-34"	30"-34"
Recirc. Mounting Height*	N/A	N/A	N/A	26"-30"	26"-34"	26"-34"	26"-34"	30"-34"