
ZEPHYR
ZEPHYRONLINE.COM

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	290 - 500	290 - 390	290 - 290
Min. - Max. Sones	2 - 7		


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.



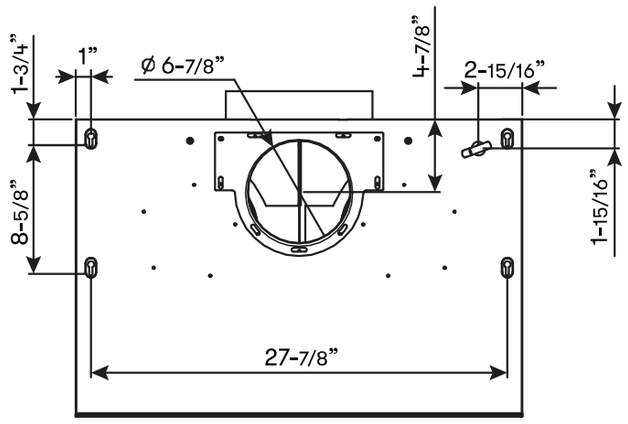

TOP




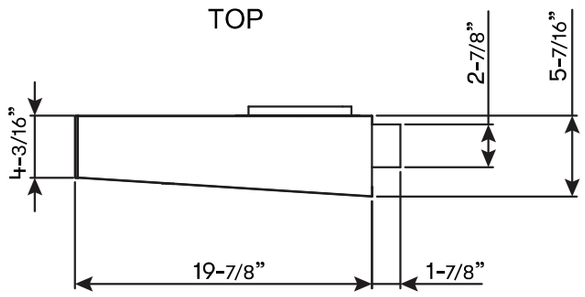

SIDE

Stainless Steel with Black Glass



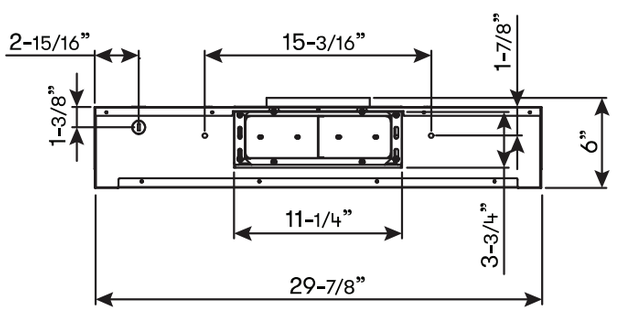

BACK

Stainless Steel with Stainless Glass

ZEPHYR
ZEPHYRONLINE.COM

MODEL	
Stainless Steel w/ Black Glass	ZVT-E30ABG
Stainless Steel w/ Stainless Glass	ZVT-E30ASG
Size	30”
BLOWER PERFORMANCE	
Blower CFM (Min. - Max.)	290 - 500
Sones (Min. - Max.)	2 - 7
ACT 390 CFM (Min. - Max.)	290 - 390
ACT 290 CFM (Min. - Max.)	290 - 290
FEATURES	
ACT™ Technology	390, 290
Controls	Capacitive Touch
Speed Levels	3*
Auto Delay-Off	Yes
Lighting	LumiLight LED, 6W x2
Dual-Level Lighting	Yes
Filters	Hybrid Baffle x2
ADA Compliant	Yes, w/ remote accessory
DUCT SPECIFICATIONS	
Vertical Internal Blower	7” Round or 3-1/4” x 10”
Horizontal Internal Blower	3-1/4” x 10”
AC POWER	120V, 60Hz at Max. 5A
OPTIONAL ACCESSORIES	
Wireless Remote Control Kit	RC-0002
Stainless Steel Telescopic Backsplash	AK1710
Make-Up Air Kit	MUA006A
Damper, 7” Round	AK00067
MOUNTING HEIGHT RANGE**	24” - 32”
WARRANTY	3 years parts, 1 year labor

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 2 speeds and ACT 290 CFM = 1 speed.
**Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™ **Airflow Control Technology™ (ACT™)** is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

OCT26.0101

c UL us