

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 7	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 10		




Shown with optional 12" duct cover




Shown with optional 24" duct cover




Optional Wireless Remote Control

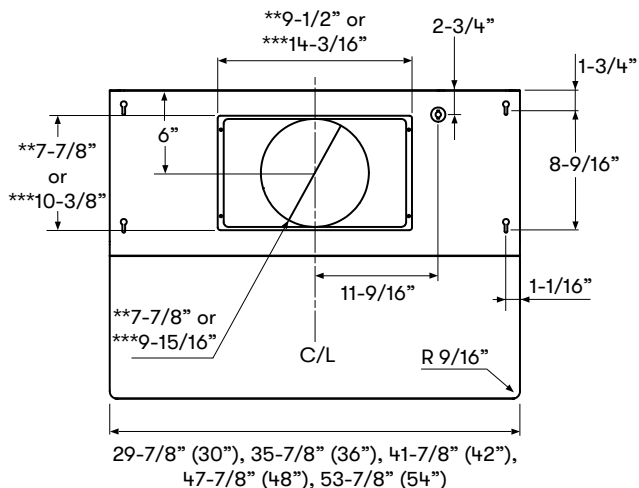

TOP

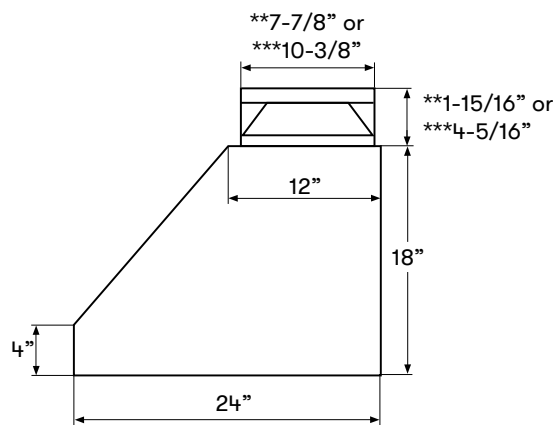

SIDE

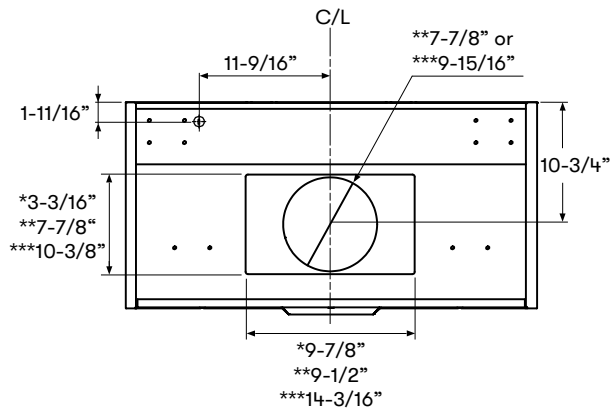

BACK

* Single Blower Rect. Ducting Dimension
 ** Single Blower Round Ducting Dimension
 *** Dual Blower Dimension

MODEL

Stainless Steel
SizeAK7500DS
30"AK7536DS/AK7542DS
36"/42"AK7548DS/AK7554DS
48"/54"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)

200 - 650

200 - 650

200 - 650

Sones (Min. - Max.)

1 - 7

1 - 7

1 - 7

ACT 390 CFM (Min. - Max.)*

200 - 390

200 - 390

200 - 390

ACT 290 CFM (Min. - Max.)*

200 - 290

200 - 290

200 - 290

Optional Dual Blower

400 - 1,200

400 - 1,200

400 - 1,200

Dual Blower Sones (Min. - Max.)

3 - 10

3 - 10

3 - 10

FEATURES

ACT™ Technology

390, 290, Single Blower Only

390, 290, Single Blower Only

390, 290, Single Blower Only

Controls

Electronic LCD

Electronic LCD

Electronic LCD

Speed Levels

5**

5**

5**

Auto Delay-Off

Yes

Yes

Yes

CleanAir Function

Yes

Yes

Yes

Lighting

LumiLight LED, 6W x2

LumiLight LED, 6W x2

LumiLight LED, 6W x4

Dual-Level Lighting

Yes

Yes

Yes

TruHue™

Yes

Yes

Yes

Filters

Pro Baffle x2

Pro Baffle x2

Pro Baffle x3

Wireless Remote Control Option

Yes, RF

Yes, RF

Yes, RF

Dual Internal Blower Option

Yes

Yes

Yes

Recirculating Option***

Yes, Single Blower Only

Yes, Single Blower Only

NA

ADA Compliant

Yes (with remote accessory)

Yes (with remote accessory)

Yes (with remote accessory)

DUCT SPECIFICATIONS

Vertical Single Internal Blower

8" Round

8" Round

8" Round

Horizontal Single Internal Blower

3-1/4" x 10" or 8" Round

3-1/4" x 10" or 8" Round

3-1/4" x 10" or 8" Round

Vertical Dual Internal Blower

10" Round

10" Round

10" Round

Horizontal Dual Internal Blower

10" Round

10" Round

10" Round

AC POWER (Single Blower)

120V, 60Hz, Max. 5A

120V, 60Hz, Max. 5A

120V, 60Hz, Max. 5A

AC POWER (Dual Blower)

120V, 60Hz, Max. 9A

120V, 60Hz, Max. 9A

120V, 60Hz, Max. 9A

OPTIONAL ACCESSORIES

12" Duct Cover

AK0720

AK0726/AK0722

AK0728/AK0724

24" Duct Cover

AK1720

AK1726/AK1722

AK1728/AK1724

Wireless Remote Control Kit

RC-0002

RC-0002

RC-0002

Dual Internal Blower Kit

PBD-1200B

PBD-1200B

PBD-1200B

Recirculating Kit

ZRC-7000C

ZRC-7036C/ZRC-7042C

ZRC-7048C/NA

Stainless Steel Telescopic Backsplash

AK1710

AK1716/AK1712

AK1718/AK1714

Make-Up Air Kit (Single Blower)

MUA008A

MUA008A

MUA008A

Make-Up Air Kit (Dual Blower)

MUA010A

MUA010A

MUA010A

MOUNTING HEIGHT RANGE†

26" - 36"

26" - 36"

26" - 36"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

*ACT is only available with a single internal blower

**When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.

ACT™

Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

AUG26.0101

