


Product Features

- 90° Ceramic cartridges
- Spout swivels 150°
- Flexible connecting hoses accommodate a variety of installations
- Cascade no-clog aerator
- 2.2 gpm
- Includes pop-up drain

Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO
- Approved for use in Massachusetts

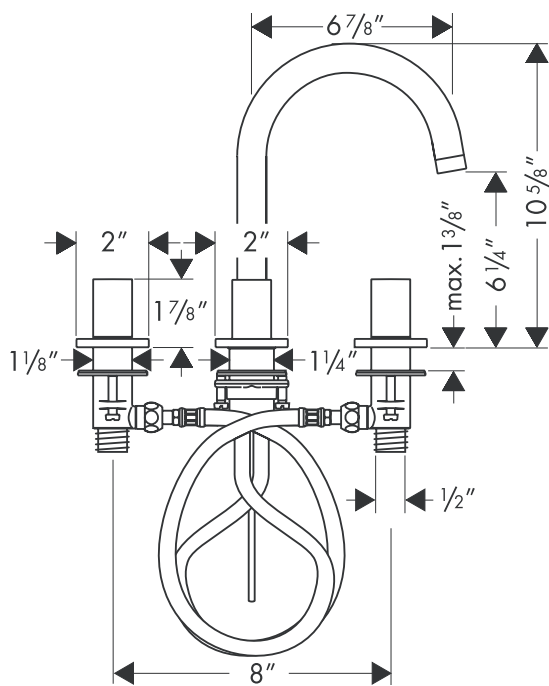

Available Finishes

Chrome

38053001

Brushed Nickel

38053821

Required Accessories

- Requires 1/2" supply lines

Installation Notes

- Max. thickness of mounting surface 1 3/8"
- Hole sizes in mounting surface: valves 1 1/4", spout 1 3/8"

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 12/2007