



CIRRUS CC34I RANGE HOOD

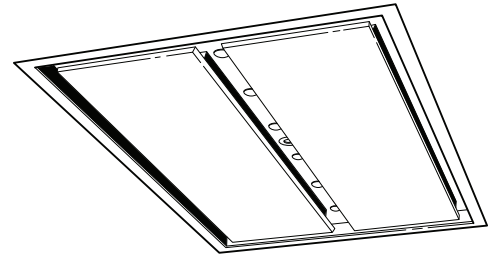

Today's open-living concepts integrate rooms and broad vistas. CIRRUS fits in with its linear, discrete, and virtually out of sight design that won't get in the way of any vista.

FEATURES

- Italian design
- Ceiling mount
- Finishes: 430 brushed stainless steel #4
- Width: 110 cm (43-3/8")
- Ducted only
- 6" round duct connector/backdraft damper
- 1-level LED lighting (6 lamps included - 3 watts each)
- 4-speed electronic light touch control
- Remote control included
- Quiet, variable-speed centrifugal blower with high-efficiency motor produces 500 CFM of exhaust
- Delay timer control automatically shuts off range hood after 10 minutes
- Filter clean reminder
- Dishwasher-safe filters feature a quick-release latch
- For indoor use only

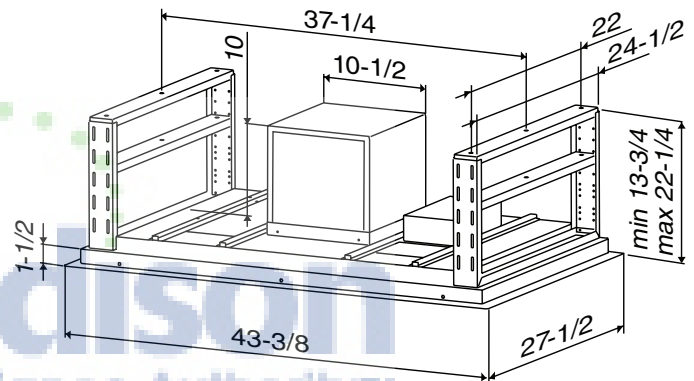

SPECIFICATIONS

VOLTS	HZ	AMPS	CFM		SONES		DUCT
			MAX.	NORM.	MAX.	NORM.	
120	60	3.5	500	220	7.0	2.5	6" Round




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
 BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

CIRRUS CC34E RANGE HOOD

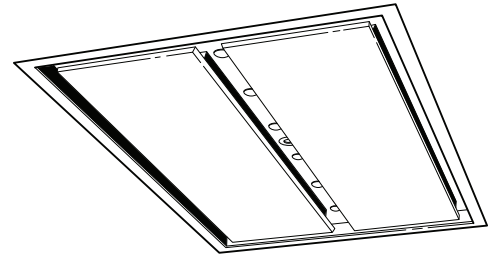


Today's open-living concepts integrate rooms and broad vistas. CIRRUS fits in with its linear, discrete, and virtually out of sight design that won't get in the way of any vista.

FEATURES

- Italian design
- Ceiling mount
- Finishes: 430 brushed stainless steel #4
- Width: 110 cm (43-3/8")
- Ducted only
- 8" round duct connector/backdraft damper
- 1-level LED lighting (6 lamps included - 3 watts each)
- 4-speed electronic light touch control
- Remote control included
- Use with exterior-mounted or attic-installed remote blowers for different levels of exhaust capacities (see specifications)
- Delay timer control automatically shuts off range hood after 10 minutes
- Filter clean reminder
- Dishwasher-safe filters feature a quick-release latch
- For indoor use only

OPTIONS

- 8-in. to 10-in. transition (Model 414)

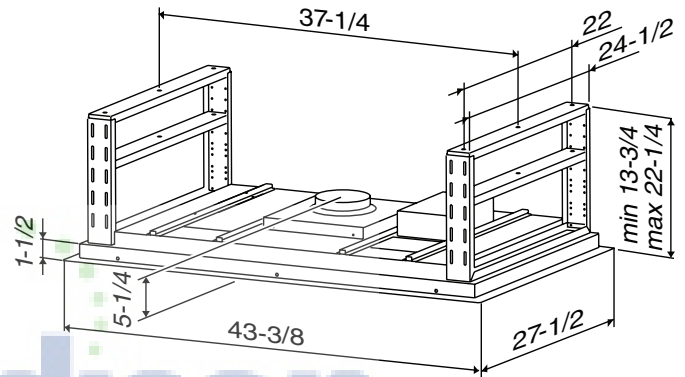

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	wall or roof mount remote blowers	600 max.	120	0.43 (lights only) + 6.0 max. (blower only)	8-in. round at the hood. See blower specs for duct requirements.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	attic installed inline blowers	280 max.			
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			



BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
 BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date