



High-Efficiency Laundry Center FFLG3911QW

3.8 Cu.Ft. Washer D.O.E.
5.5 Cu.Ft. Dryer D.O.E.
Gas



Product Dimensions

Height	77"
Width	27"
Depth	31-1/2"

More Easy To Use Features

4 Drying Cycles

Offers 4 drying cycles to meet all of your drying needs including Delicates, Casuals and Heavy-Duty.

Timed Dry Cycle

Select your desired drying time limit that works with your schedule.

ENERGY STAR®



Available in:



Classic
White
(W)

¹Based upon an estimated 5 lbs. of laundry per day for a family of three. Actual load weight may vary with a maximum of 15 lbs. per load.

Signature Features

Super Capacity

Fit more in every load. Wash and dry 3 days of laundry at once with our 3.8 cu.ft. HETL washer¹.

Super Efficiency

Strong, efficient cleaning performance, every time, with our high efficiency washer with stainless steel tub.

ENERGY STAR®


Save energy, save time. In order to save energy, the washer extracts more water from clothes during the spin cycle, reducing the drying time.

8 Wash Cycles

Features 8 multiple wash cycles to meet all of your washing needs such as delicate, bedding and casual.

Washer Features	
Washer Type	HE Top Load
Total Capacity D.O.E. (Cu.Ft.)	3.8
Controls	Ready-Select®
Washer Interior	Stainless Steel
Vibration Control System	Yes
Suspension System	
Wash System	
Fresh Water Rinse	Yes
Automatic Temperature Control	
Water Level Adjustments	3
Bleach Dispenser/Detergent Dispenser	Yes/No
Fabric Softener Dispenser	
Cycle Signal	
Cycle Signal "On/Off"	
Agitate Speeds (Strokes/Min.)	Variable
Spin Speeds (RPM)	850
Wash Cycles	
Wash Cycles/Specialty Cycles	8/0
Washer Options	
Temperature Selections	3 (Rotary)
Water Levels	3
Energy Saver Option	
Dryer Features	
Total Capacity D.O.E. (Cu.Ft.)	5.5
Dryer Drum Interior/Interior Light	Stainless Steel/No
Wrinkle Release Technology	
DrySense™ Technology	
Moisture Sensor	
Cycle Signal	
Cycle Signal "On/Off"	
Tumble Speed (RPM)	50
Lint Screen	Yes
Dry Cycles	
Dry Cycles/Specialty Cycles	4/0
Dryer Options	
Temperature Selections	3
Dryness Level Selections	0
Timed Dry (Minutes)	15, 30, 45, 90
Optional Accessories	
Mobile Home Installation Kit	PN# 137067200
LP Gas Conversion Kit	PN# PCK3100
Drying Rack	PN# DRLC
Certifications	
ENERGY STAR®	Yes
NSF® Certified	
Specifications	
Maximum Exhaust Duct Length¹ (Ft.)	56
Gas Connection	Rear
Power Supply Connection Location	Middle Rear
Water Inlet Connection Location	Middle Rear
Voltage Rating	120V / 60Hz / 15A
Connected Load (kW Rating) @ 240 Volts	1.03
Amps @ 240 Volts	13
Heating Element (BTU/HR)	20,000
Shipping Weight (Approx.)	275 Lbs.

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

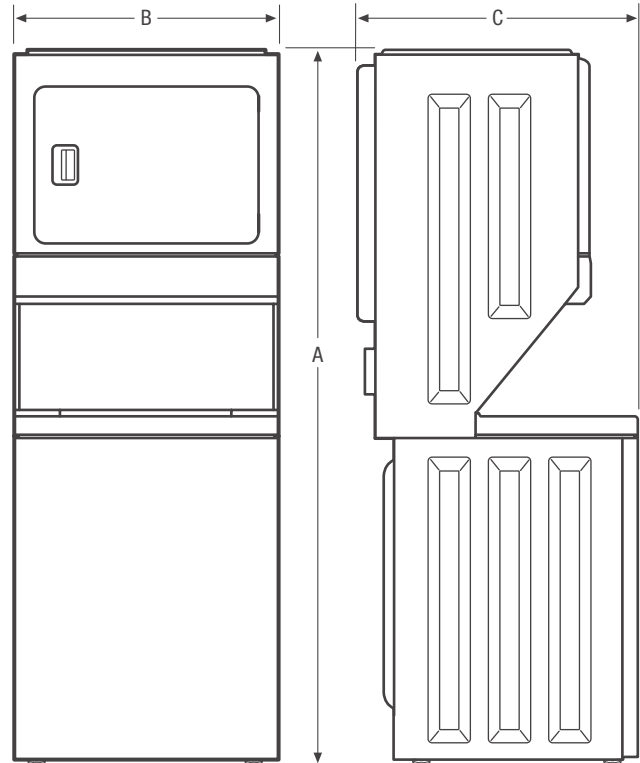

NOTE: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Height	77"
B - Width	27"
C - Depth	31-1/2"
Depth with Door Open 90°	47-1/2"

Accessories information available on the web at frigidaire.com