

PureLine Obsidian Black 24" Speed Oven

H 6600 BM OBSW



PureLine Speed Oven H 6600 BM OBSW



H 6600 BM OBSW

Features:

- SensorTronic controls: 5-line TFT display with laterally positioned sensor controls that clearly present menu content
- 19 operating modes
- Rapid Preheat
- Roast probe for perfect roasting results
- MasterChef menu offers over 100 food types to cook to perfection
- Favorites - up to 20 recipes
- 1,000 watt microwave
- Popcorn button
- Minute Plus button - time and power individually programmable
- PerfectClean interior
- Timer
- Sabbath Program
- The simple yet sleek Silhouette handle seems to float enhancing its modern design lines

SPECIFICATIONS

H 6600 BM OBSW — Item 22660024USA

Overall Unit Width - Excluding Fascia Dimension	22 ¹ / ₁₆ " (560 mm)
Overall Unit Height - Excluding Fascia Dimension	17 ¹ / ₂ " (445 mm)
Overall Unit Depth - Excluding Fascia Dimension	21 ⁵ / ₁₆ " (542 mm)
Oven Door Clearance	12 ⁵ / ₁₆ " (313 mm)
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595 mm) W x 17 ¹⁵ / ₁₆ " (455 mm) H x 7 ⁷ / ₈ " (22 mm) D

Built-In

Minimum Cabinet Opening Width	22 ¹ / ₁₆ " (561 mm)
Minimum Cabinet Opening Depth	21 ⁵ / ₈ " (550 mm)
Minimum Cabinet Opening Height	17 ³ / ₄ " (450 mm)
Minimum Base Support	125 lbs

Electrical

Electrical Requirements	240/208V AC, 60Hz, 20A
Power Cord	Molded NEMA 14-30 configured plug
Electrical Rating	2.2kW (240V), 1.76kW (208V)



Shipping

Shipping Weight	126 lbs
Shipping Dimensions	25 ⁵ / ₈ " W (727 mm) x 24 ¹³ / ₁₆ " (630 mm) H x 27" (686 mm) L

Support

Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

HANDLE SPECIFICATIONS

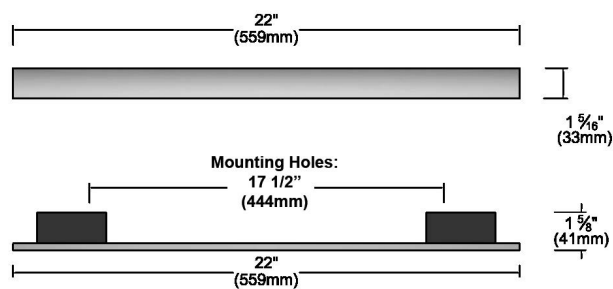


PureLine Speed Oven
H 6600 BM OBSW




PRODUCT VIEWS

Fascia

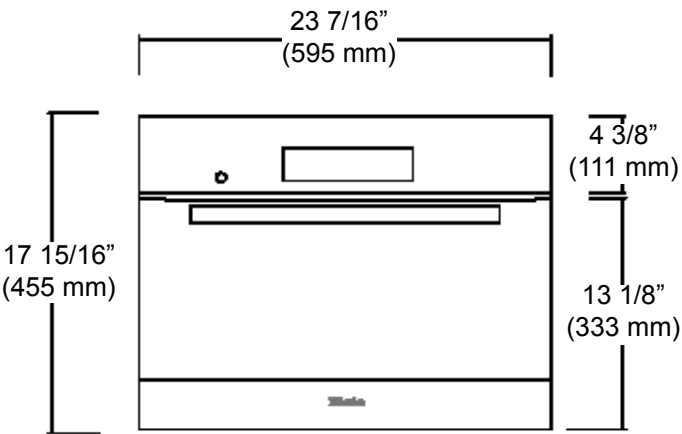


Top View

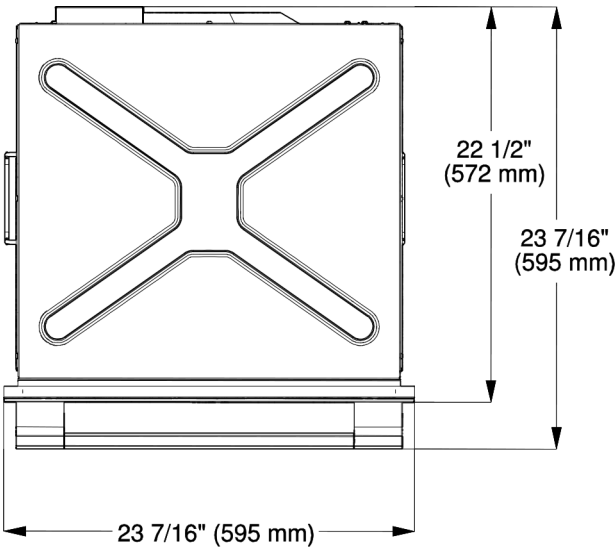


PRODUCT VIEWS

Rear View

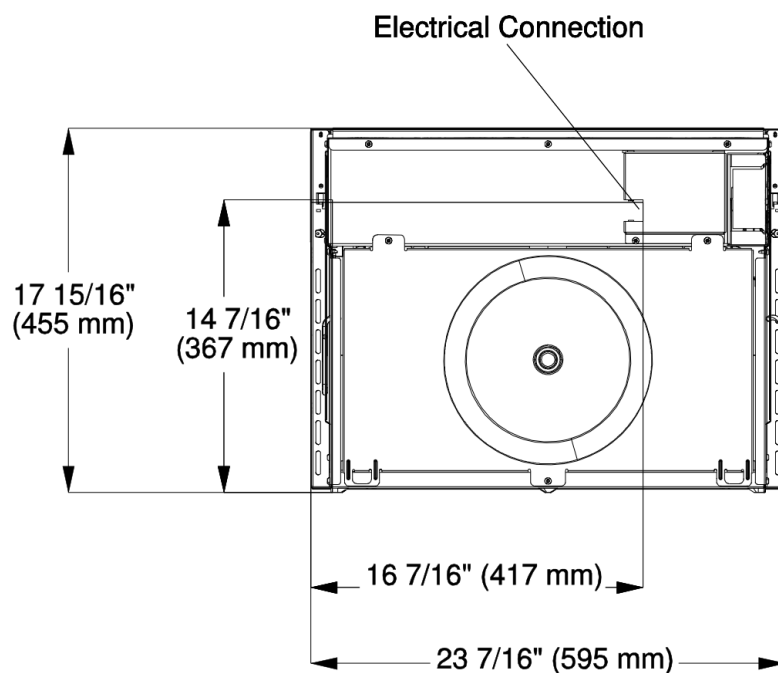

Side View

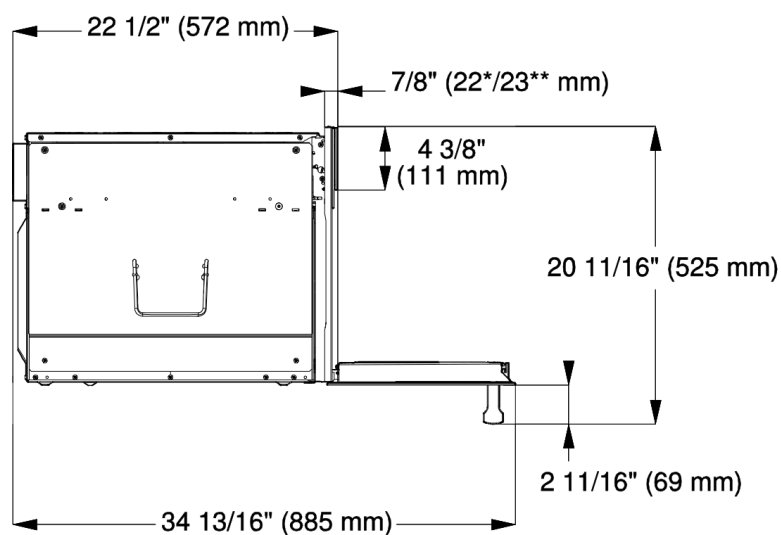


* Oven with glass front

** Oven with metal front

INSTALLATION SPECIFICATIONS

Door Swing Details

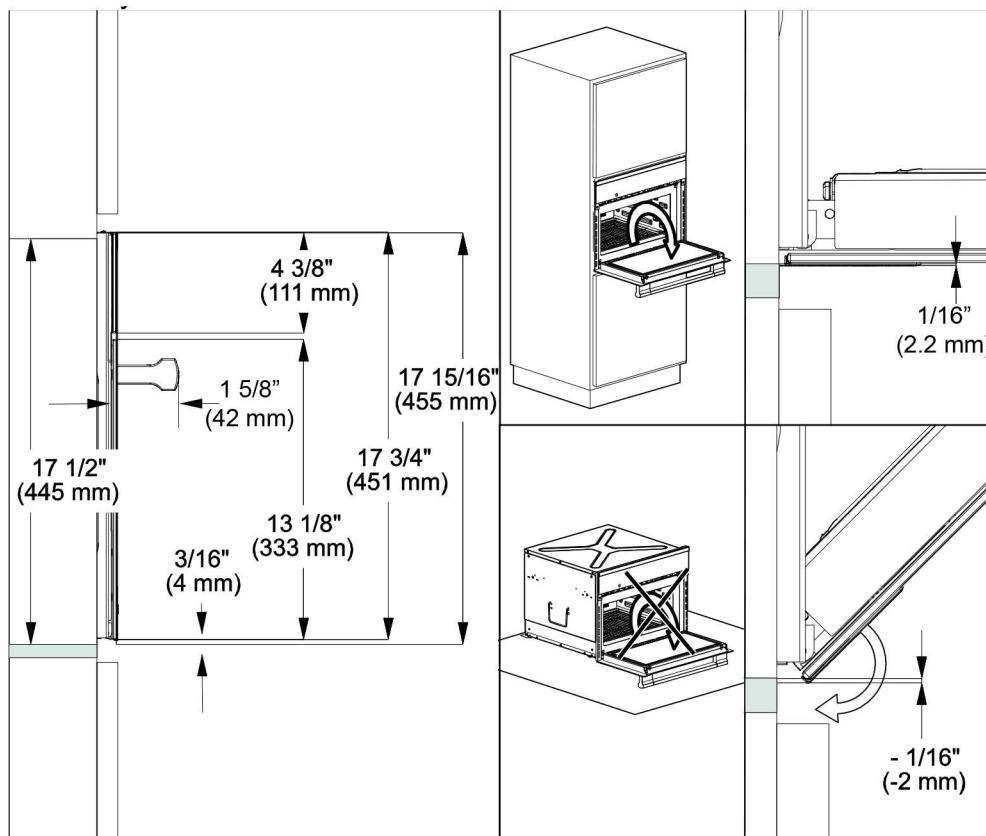


PureLine Speed Oven H 6600 BM OBSW



INSTALLATION SPECIFICATIONS


Install in Tall Cabinet

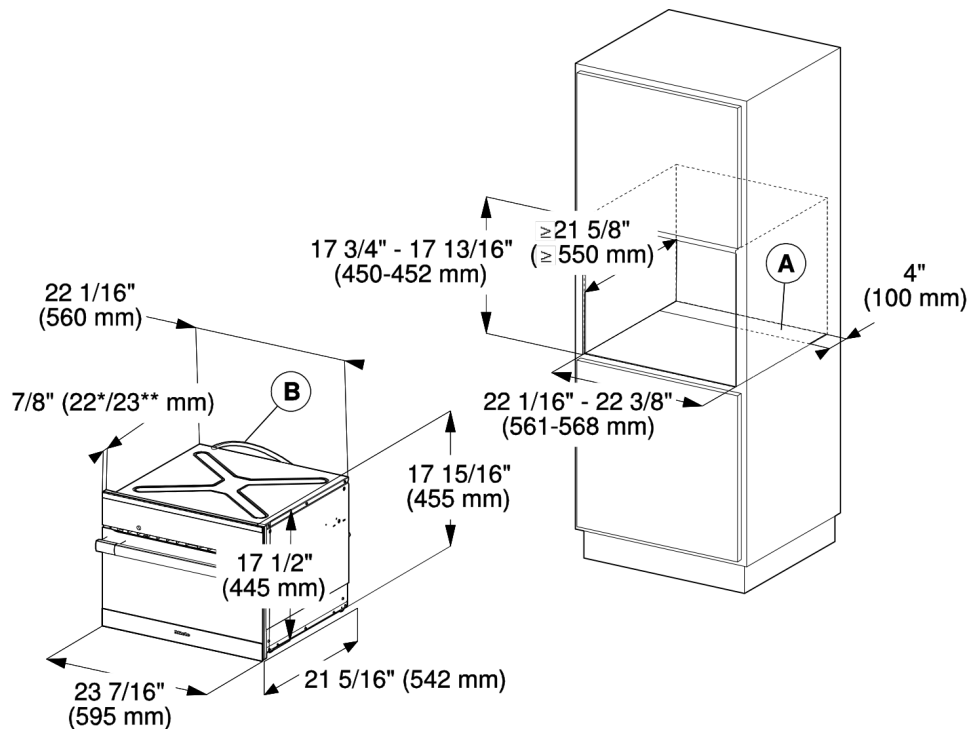

- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

Undercounter Installation With Framed Cabinet

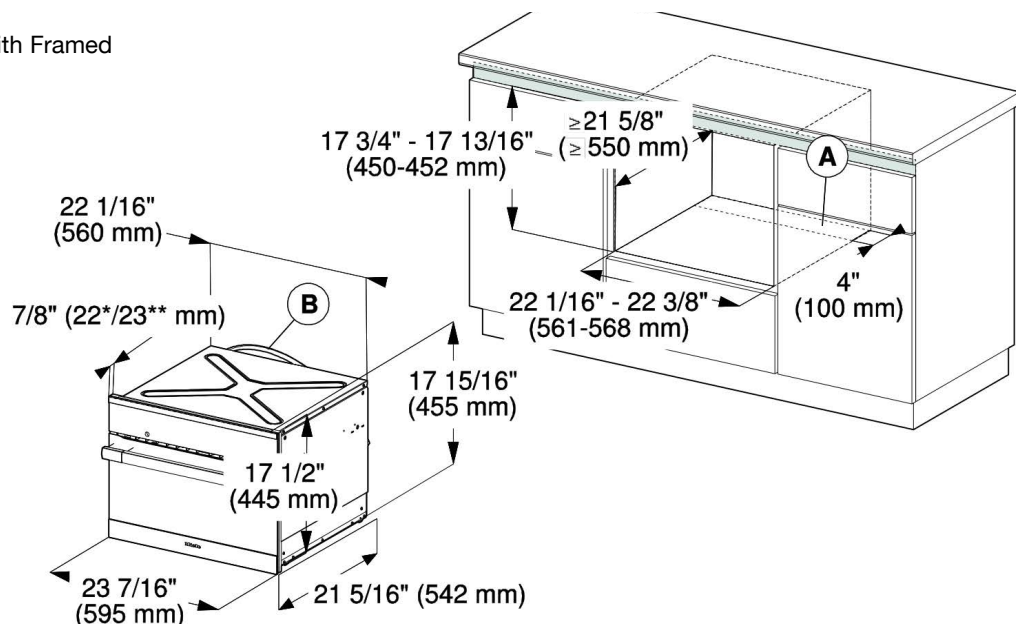

- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug


* Oven with glass front
** Oven with metal front

PureLine Speed Oven H 6600 BM OBSW



INSTALLATION SPECIFICATIONS


Undercounter Installation Against CounterTop

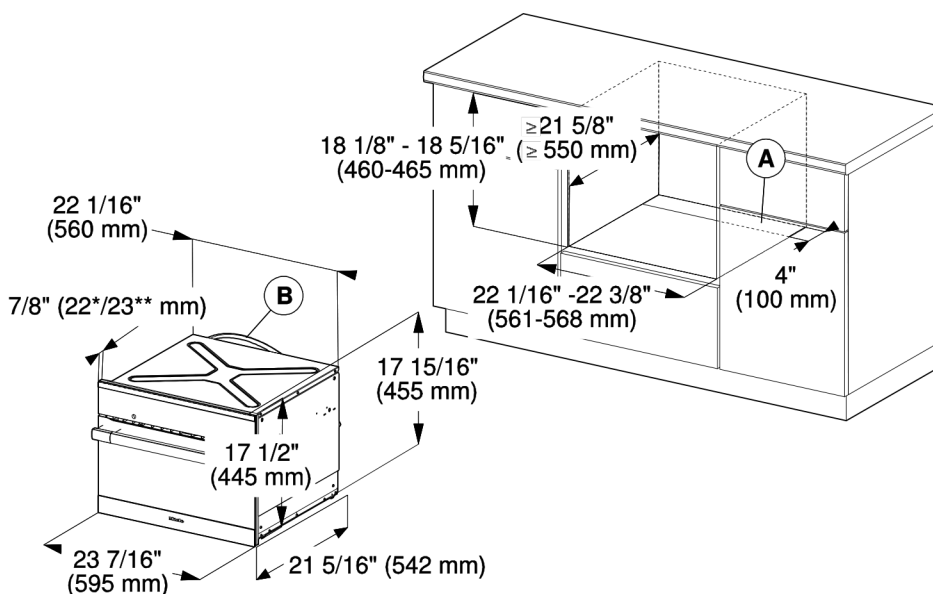

- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

Under Counter Install Against Counter Top
Front View

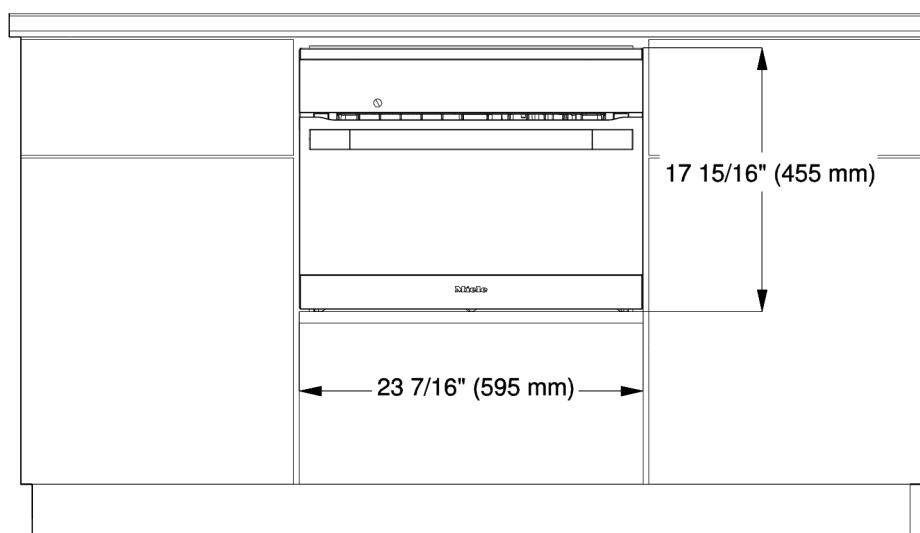


PureLine Speed Oven H 6600 BM OBSW



INSTALLATION SPECIFICATIONS

Stacked With 24 Inch Oven Installation

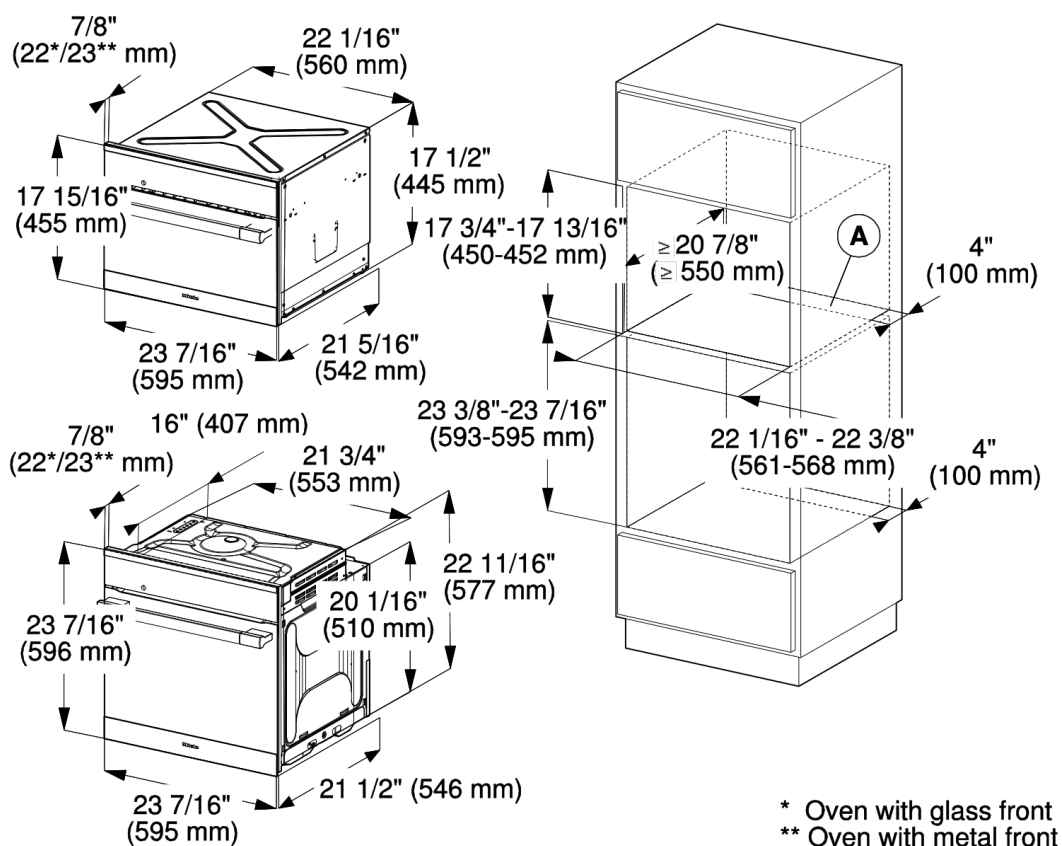

30" Trim Kit

EBA 6708, EBA 6708 HVBR,

EBA 6708 BRWS

EBA 6808, EBA 6808 HVBR,

EBA 6808 BRWS




30" Trim Kit EBA 6708, EBA 6808



INSTALLATION SPECIFICATIONS

Installation In Tall Niche

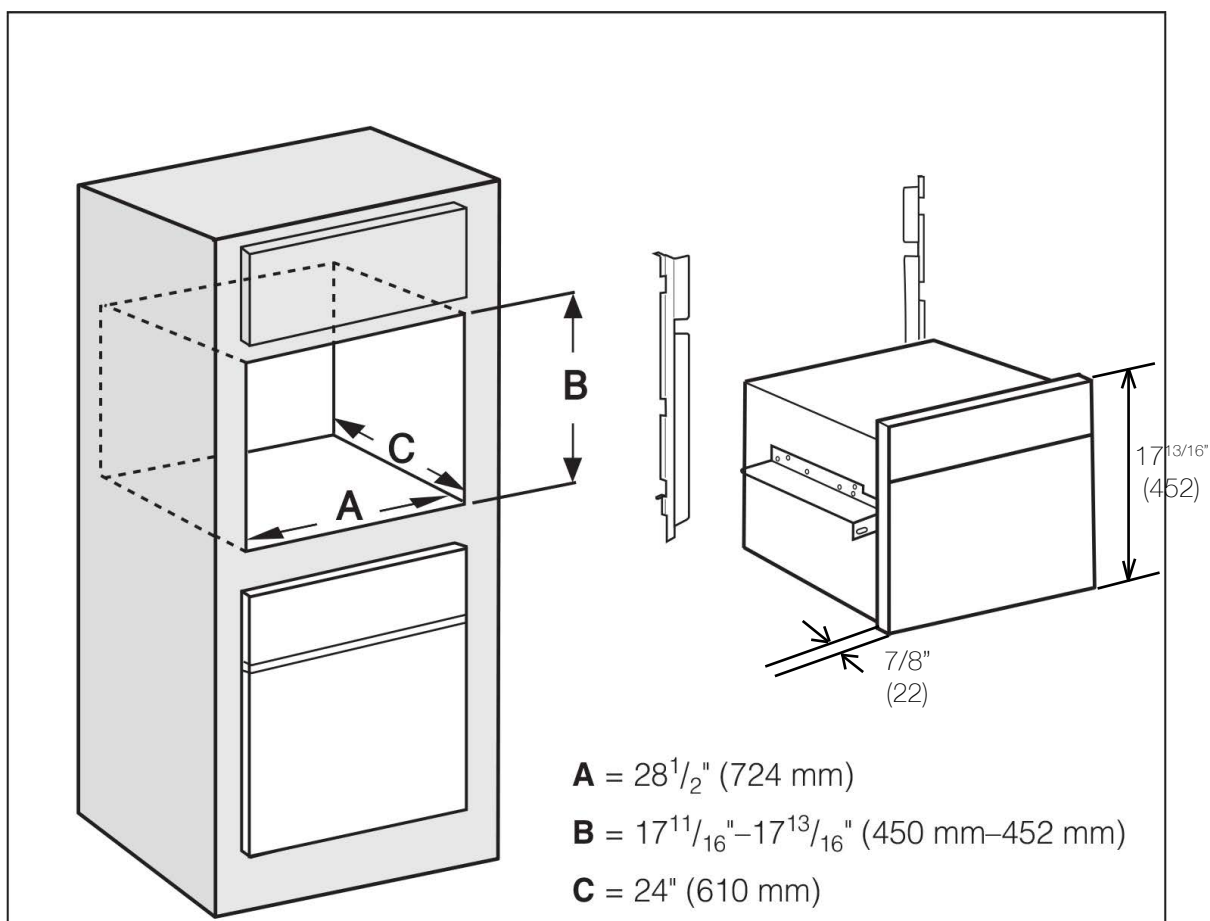

** Follow the appliance's installation directions for plumbing, electrical, and ventilation.

Technical drawings of the 30-inch wide refrigerator and freezer unit, showing front and side views with dimensions in inches and millimeters.

Front View Dimensions:

- Top Freezer: 17 5/8" (448) height, 28 1/2" (724) width, 19 1/16" (40) depth.
- Bottom Freezer: 28 1/4" (718) height, 28 1/2" (724) width, 19 1/16" (40) depth.
- Refrigerator Section: 28 1/2" (724) width, 17 1/2" (444) depth.

Side View Dimensions:

- Top Freezer: 21 5/8" (549) depth, 29 13/16" (757) width, 17 5/8" (449) height.
- Refrigerator Section: 27 3/4" (705) height, 29 13/16" (757) width, 7/8" (22) depth.
- Bottom Freezer: 28 5/8" (727) height, 29 13/16" (757) width, 7/8" (22) depth.

Page 3 of 3
Specification Sheet TRS 03032015