


OCEANAIRE

Heat Pump Accessories

ConvertibleAire



- 2NK-1** (right) 4 inch diameter flexible nozzles used on 20ACH12.
- 2NK-2** (left) 6 inch diameter flexible nozzles used on 20ACH18, 24.
- 2NK-3** (center) 8 inch diameter flexible nozzles used on 20ACH60.
- 2NK-4** (not pictured) 8 inch diameter flexible nozzles used on 20ACH36.

CK ... Ceiling Kit, contains a 24 in. by 24 in. drop-in adapter with a duct collar (left), and a condenser air discharge collar for attachment to the unit (right). Screws and an 8 ft. length of flex duct is included in the kit. 12 in. duct and fittings handle the 20ACH12, 18, 24 and 36. 16 in. duct and fittings handle the 20ACH60.



- 2DDA Duct Adapter** used to apply a single discharge duct to the evaporator.
- 2DDA-6** fits 20ACH12 and transitions to 6 in. round duct and can handle 25 equivalent ft.
- 2DDA-10** fits 20ACH18, 24 and transitions to 10 in. round duct and can handle 50 equivalent ft.
- 2DDA-12** fits 20ACH36 and transitions to 12 in. round duct and can handle 50 equivalent ft.
- 2DDA-16** fits 20ACH60 and transitions to 16 in. round duct and can handle 80 equivalent ft.

DEP ... Evaporator Inlet Air Plenum attaches in place of the standard return air grille allowing a ducted return. Great for remote cooling of computer and equipment rooms. **DEP-10** fits 20ACH12, uses one 10 in. duct and can handle 25 equivalent ft. **2DEP-12** fits 20ACH18, 24 uses one 12 in. duct and can handle 25 equivalent ft. **DEP-16** fits 20ACH36, 60 and uses one 16 in. duct. The 36 can handle 50 equivalent ft. and the 60 can handle 80 equivalent ft.



2DPC-1 (115v) and **2DPC-2** (230v) **Condensate Pump**. Complete with overflow safety switch, check valve, 20 ft. heat and quick connect plug-in. Standard on the 20ACH60, optional on all other ConvertibleAire models. Very easy to install.


2DCP ... Condenser Inlet Air Plenum allows condenser air to be ducted into the unit from outside the conditioned space if required. This also eliminates negative air pressure in the space being cooled by eliminating infiltration. **2DCP-1** fits 20ACH12, uses one 12 in. duct and can handle 25 equivalent ft. **2DCP-2** fits 20ACH18, 24, uses one 12in. duct and can handle 50 equivalent ft. **2DCP-3** fits 20ACH 35, uses one 12 in. duct and can handle 50 equivalent ft. **2DCP-4** fits 20ACH60, uses 2 12 in. ducts and can handle 80 equivalent ft.



Single inlet condenser plenum used on all models except 5-ton.



Dual inlet plenum used on the 5-ton.

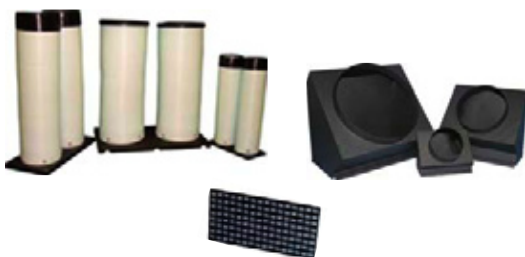

A side by side look comparing the duct adapter for a single duct run (right), to the nozzles with 2 discharge ducts (left). The grille (center) is standard equipment.

Spot Coolers
800.367.8675
www.spot-coolers.com