



## STANDARD FEATURES

• Single or double side sealed burner(s) configurations

• Double side burners: 20,000 Btu/hour brass front burner and 10,000 Btu/hour brass rear burner

• Single side burner: 20,000 Btu/hour brass sealed burner

• 5/16" thick DiamondCut™ grate




Bright LED Lighting



Sealed Burner Bowl



Stainless Cover



Lasered Stainless Steel Grate - 5/16" thick • Sealed burner bowl with drain tube for easy cleaning

- Electronic spark ignition system with re-ignition capability
- LED lighting on front control panel
- Heavy gauge welded body construction
- Stainless steel drip tray for ease of cleaning
- Stainless steel top cover
- Double side burner is mountable to Tower Carts
- 120V, 60Hz, 1 amp



Model shown AGB122-LP


## **OPTIONS & ACCESSORIES**


- Natural Gas (NG) or Liquid Propane (LP)
- Twelve (12) Hestan signature color finishes
- · High altitude kit
- Gas conversion kits (NG/LP)
- Carbon Fiber Vinyl Cover










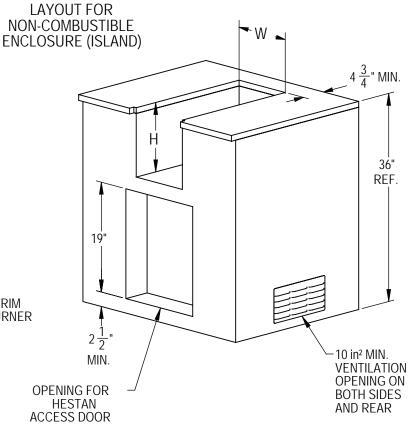

## 

**TOP VIEW** 



**ELECTRICAL REQUIREMENTS**: 120V, 60Hz, 6 amps

**GAS REQIREMENTS**: 1/2" NPT gas connection. Minimum gas supply is 7" water column for natural gas and 11" for propane. Operating pressure at the manifold is 4" water column for natural gas and 10" for propane. All units require a regulated gas supply.



Hestan Outdoor products are approved for outdoor use only. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Specify type of gas when ordering.

All Models	Description	Cutout Dimensions			Total Btu's
All Wlodels	Description	W(in.)	D(in.)	H(in.)	10tai Dtu 3
AGB121-NG / -LP	Single Side Burner, Built-in, 12"	11	13-7/8	12	20,000
AGB122-NG / -LP	Double Side Burner, Built-In or Cart-Attached 12"	11	24-1/4	12	30,000





3-1/2" X 5-1/2"



**INSTALLATION**