
### Installation Instruction

Single Handle Pull-down Kitchen Faucet

### Before Your Installation

Check to make sure you have the following parts indicated below:



### Tools You Will Need



Adjustable wrench



Phillips screwdriver



Spanner for body (supplied)




Adjustable wrench



Spanner for aerator (supplied)

### Replacement Parts


Keep this manual for ordering replacement parts.

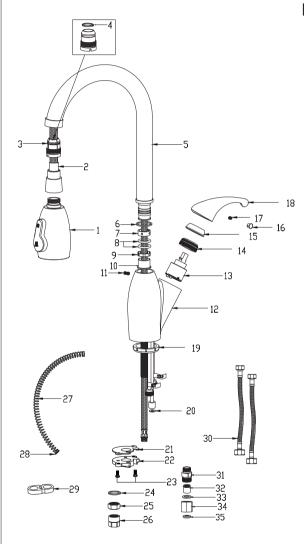


### NO NAME


- Pull-out sprayer 1.
- 2. Black nylon hose
- Plastic sleeve 3.
- Spring ring 4.
- Spout 5.
- White ring 6.
- Sleeve 7.
- O-ring 8
- Sleeve 9
- Sleeve
- 10.
- 11. M4 screw
- Faucet body 12.
- Cartridge 13.
- Fastening nut 14.
- Cartridge cover 15.
- Cover button 16.
- 17. M6 screw
- 18. Handle
- Bottom rubber 19.
- Flat gasket 20.
- Fastening rubber 21.
- Fastening gasket 22.
- Screw 23.
- Fastening ring 24.
- Fastening nut 25.
- 26. M6 nut
- Spring 27.
- Anti-friction sleeve 28.
- 29. Plastic stop collar
- 30. hose
- 31. sleeve nut
- 32. check valve
- 33. Flat gasket
- 34. Nut
- Flat gasket 35.


# Product Dimension Drawing

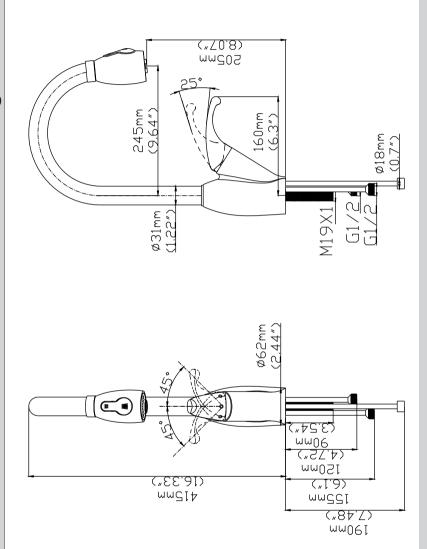



### Faucet Installation Procedures









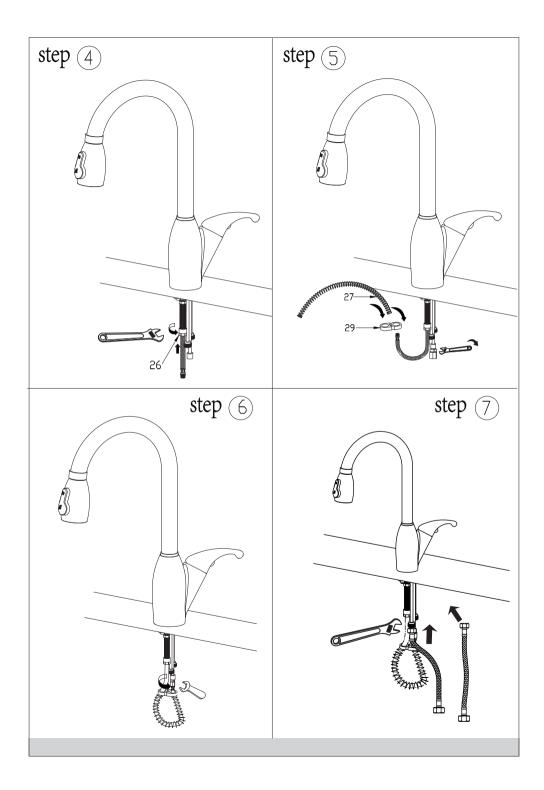


### Step ®






### Step 9

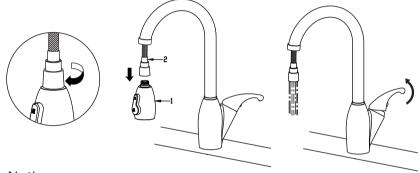


### Notice:

Please removing all of the sand, silt and other things from the water hose before assembling, to avoid blocking the faucet and effecting water rate. Please use the special tools to disassemble it and wash with pneumatic equipment, if the faucet blocked.

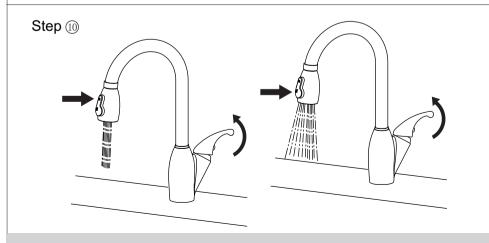


# step (10)





## step (11)



# step 12 step 13