

# Viking Installation Guide



Viking Range Corporation

111 Front Street

Greenwood, Mississippi 38930 USA

(662) 455-1200

For product information,


call 1-888-VIKING1 (845-4641)

or visit the Viking Web site at

[vikingrange.com](http://vikingrange.com)



## Access Doors for VGBQ "T" Series Gas Grills

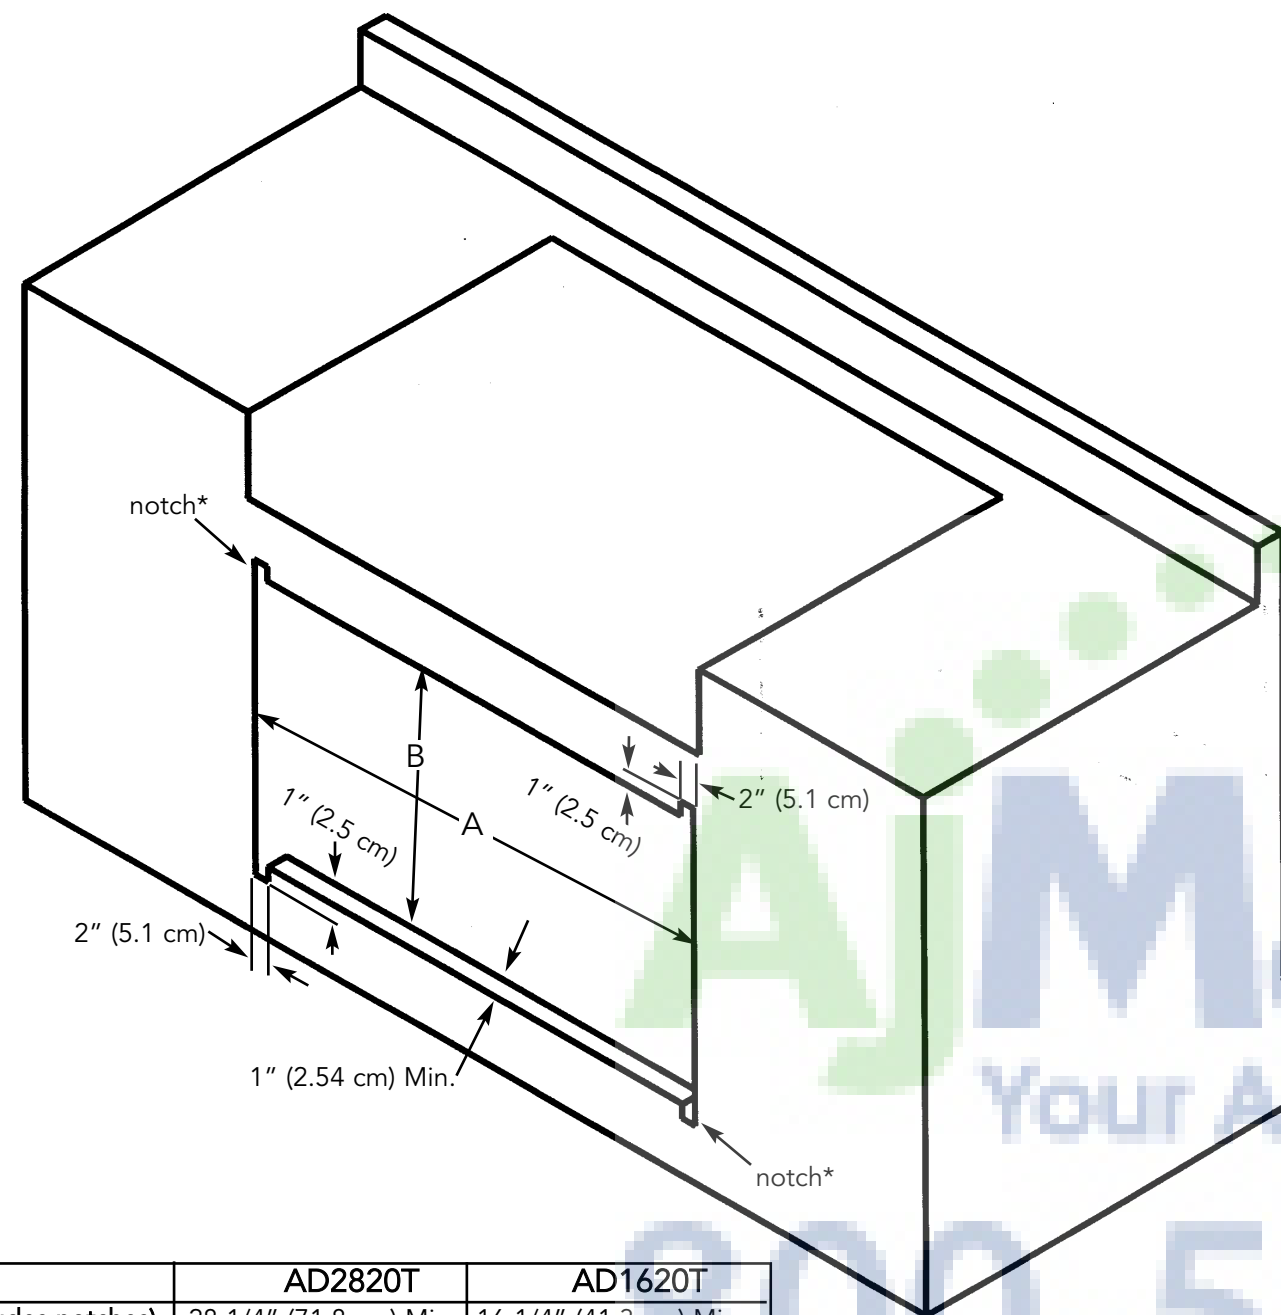

|                      | AD2820T                                          | AD1620T                                          |
|----------------------|--------------------------------------------------|--------------------------------------------------|
| A (includes notches) | 28 1/4" (71.8 cm) Min.<br>30 1/4" (76.8 cm) Max. | 16 1/4" (41.3 cm) Min.<br>18 1/4" (46.4 cm) Max. |
| B (opening only)     | 20 1/4" (51.4 cm) Min.<br>20 1/2" (52.1 cm) Max. | 20 1/4" (51.4 cm) Min.<br>20 1/2" (52.1 cm) Max. |

\*Before centering doors in opening, make the notches in all four corners for double access doors and only in the hinge side for single access doors. The notches need to be 1" long x 2" wide. Attach with the four screws that are provided.

**For Single Access Door (AD1620T):** Only notch the side where the hinge is located. Door can be mounted with left or right door swing.

