



CE 490 612

Stainless steel frame

Width 36" (90 cm)

Included accessory

1 glass scraper

Electric cooktop

CE 490

- Sturdy stainless steel frame
- Twist-Pad control with removable magnetic knob

Cooking zones

1 Super-Quick cooking zone
 ø 7" (1,500 W), converts to
 ø 9" (2,400 W) cooking zone.
 1 Super-Quick cooking zone
 ø 4¾" (800 W), converts to
 ø 7" (2,000 W) cooking zone.
 2 Super-Quick cooking zones
 ø 5¾" (1,200 W).

Handling

Twist-Pad control with removable magnetic knob.
 Cooking zone marking.
 Electronic power control in
 17 output levels.

Functions

Quick boil timer, with individually
 adjustable boiling time.
 Cooking timer for up to
 90 minutes.
 Short-term timer.
 Memory function.
 Options menu.

Safety


Main switch.
 Operation indication.
 Individual residual heat indication.
 Child lock.
 Safety lock.

Planning notes

Appliance depth 1¾", depth at
 fitting/conduit is 2⅜".
 Below the appliance, a ⅜"
 clearance must be observed from
 side panels or intermediate shelf
 must be planned.
 The cooktop must be accessible
 from underneath to be able to
 detach the cooktop's base in a
 downward direction.
 Installation possible in a 24" deep
 standard cabinet.
 Appliance must be fixed from
 underneath.
 Hard wire required.
 Cooktop clamping range:
 13⅜" - 11⅝".

Rating

Plan a connecting cable.
 Total rating: 6.8 kW
 Total Amps: 28 Amps
 220 - 240 V / 60 Hz

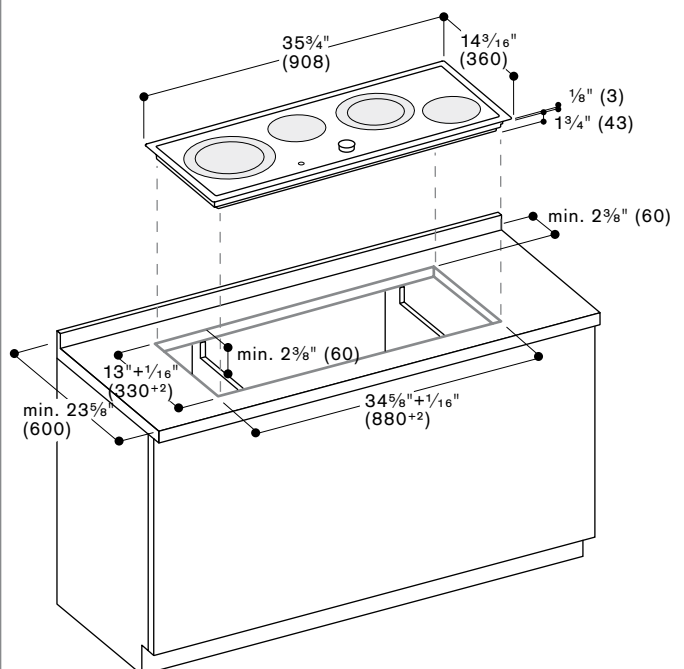

Immersion depth in the area of the electric fitting/conduit is 2⅜".

Numbers indicated
 inside parenthesis () = mm