



SBC677BIIFTWIN



34.5" x 23.63" x 25.75" (H x W x D)

Built-in undercounter frost-free beer dispenser with panel-ready door, digital thermostat, and complete dual tap kit

Highlights:

Customizable door front accepts full overlay panels for a seamless look that can blend into cabinetry

Frost-free operation ensures minimum user maintenance

Flexible design allows built-in or freestanding use in 24" spaces

Dual tap system allows you to serve beer from two 1/6 sized kegs

Product Features:

Built-in capable	Front-breathing design allows fully recessed installation under counters
Dual tap system	Twin taps let you serve two different types of beer from two 1/6 sized (sixtel) kegs
Frost-free operation	No-frost operation for minimum user maintenance
Panel-ready door	Integrated stainless steel door frame allows you to mount a panel over the front for a custom look that blends into your own cabinetry design. Handle not included (panel size: 23 7/16" W x 30 1/4" H and at least 3/4" thick)
Digital thermostat	Electronic controls ensure easy temperature management for optimum beer storage
Complete tap kit	Includes a 5 lb. CO2 tank and regulator, draft arm, dual Sankey American tap, connection hardware, and cleaning kit
Chilled tap system	Unique "cold pipe" addition ensures beer stays cold inside the tap tower, reducing the amount of foam keeping every pour at its best
Stainless steel drip tray	Two-piece drip tray included to help catch spills
Convertible to a refrigerator	Includes two adjustable glass shelves for alternate storage



SUMMIT APPLIANCE DIVISION FELIX STORCH, INC.

770 Garrison Avenue, Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com  www.summitappliance.com




SBC677BIIFTWIN Specifications:

Overview	
Height	34.5"
Width	23.63"
Depth	25.75"
Depth with Handle	27.25"
Depth with door at 90°	48.25"
Capacity	6.5 cu.ft.
Defrost Type	Frost-Free
Door	Panel-Ready
Cabinet	Black
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Energy Usage/Year	308.0kWh/year
Amps	1.1
Voltage/Frequency	115 V AC/60 Hz
Weight	106.0 lbs.
Shipping Weight	120.0 lbs.
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
Beer Dispenser	
Door Swing	RHD
Reversible	Factory Reversible
Tap Kit	Yes
Height with Tap	50.0"
Number of Taps	2
Adjustable Shelves	Yes
Shelf Type	Glass
Shelf Qty	2
Thermostat Type	Digital
Interior Light	Yes
Fan Type	Interior and Exterior
Refrigerant	R600a
Refrigerant Amount	1.2 oz.
High Side PSI	277.0
Low Side PSI	103.0
Inter Height	27.75"
Interior Width	19.25"


Interior Depth	24.25"
Compressor Step Height	6.25"
Compressor Step Width	19.25"
Compressor Step Depth	9.75"
Wheel Qty	4
Surface	Stainless Steel
Temperature Range	32° to 50°F



SUMMIT APPLIANCE DIVISION FELIX STORCH, INC.

770 Garrison Avenue, Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799 info@summitappliance.com  www.summitappliance.com

Instructions for Integrated Frame (Built-In Application)

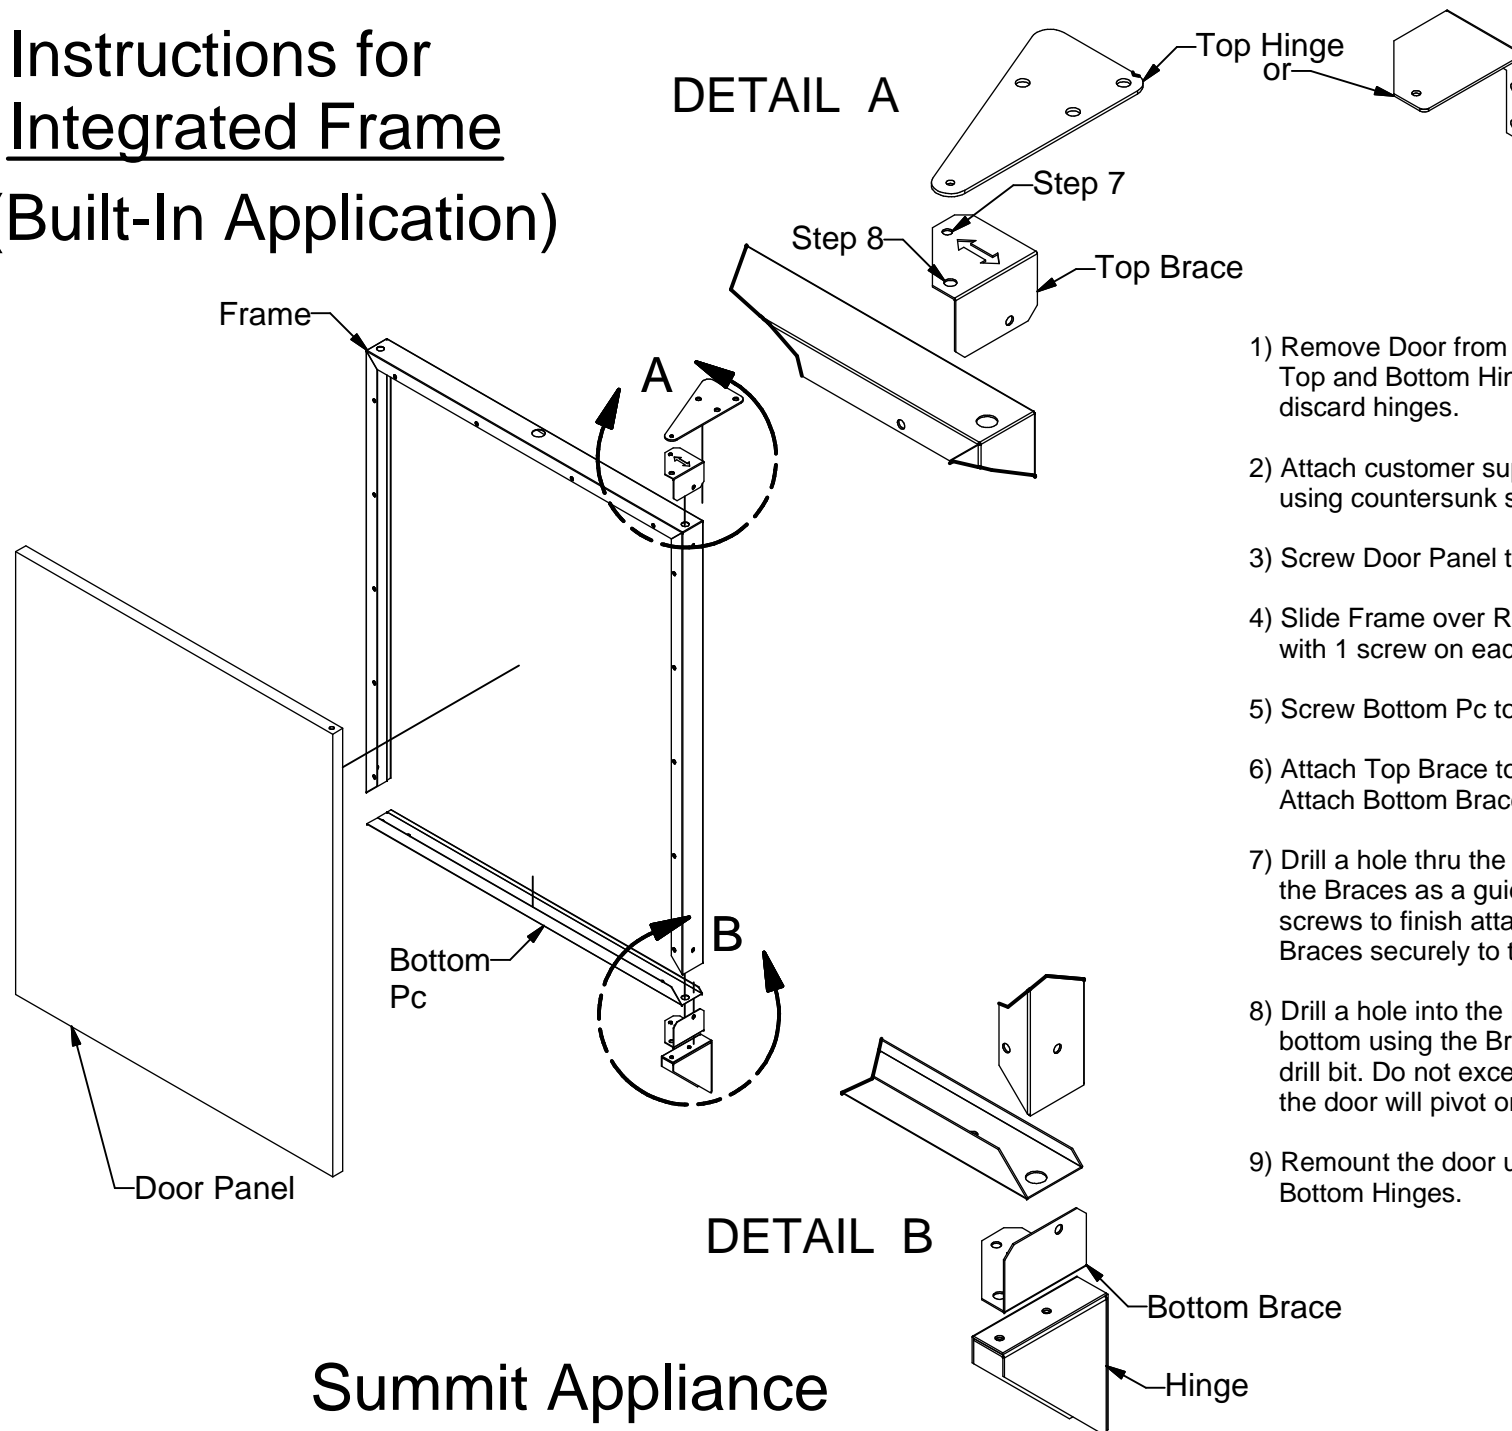

- 1) Remove Door from Chassis by removing Top and Bottom Hinges. Keep screws, discard hinges.
- 2) Attach customer supplied handle to Door Panel using countersunk screws.
- 3) Screw Door Panel to Frame.
- 4) Slide Frame over Refrigerator door and attach with 1 screw on each side, center of door.
- 5) Screw Bottom Pc to Door.
- 6) Attach Top Brace to Frame with 1 screw on side. Attach Bottom Brace in the same manner.
- 7) Drill a hole thru the Top and Bottom Frame using the Braces as a guide with a 5/32" drill bit. Install screws to finish attaching the Top and Bottom Braces securely to the Frame.
- 8) Drill a hole into the Door Panel from the top and bottom using the Braces as a guide with a 1/4" drill bit. Do not exceed 5/8". This is the hole that the door will pivot on.
- 9) Remount the door using the supplied Top and Bottom Hinges.

Summit Appliance
1-718-893-3900