


in sink erator®


The Next Necessity™



Dimensions

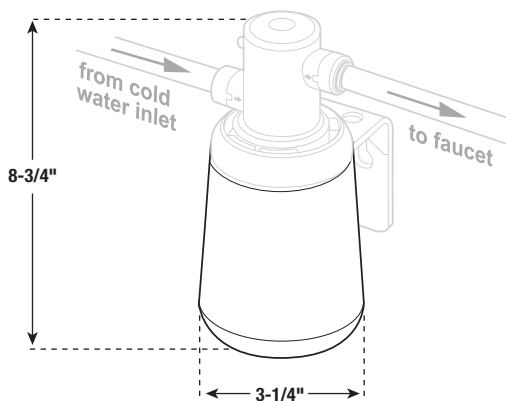

Job Specifications



Instant Hot Water Dispensers

Model F-201R Replacement Filter

For cleaner, fresher-tasting water

Submittal Sheet

- Includes 2 replacement filters for use with InSinkEerator water filtration system
- Reduces Chlorine, taste and odor for clean, refreshing taste
- Sanitary, quick-change filter cartridge makes replacement easy. A simple twist is all it takes!
- 6-12 month recommended filter cartridge replacement

Specifications

Filter Capacity	500 gallons
Temperature Range	Incoming cold water can be from 33°F to 100°F (1°C to 38°C). For cold water use only.
Pressure	20-120 psi
Flow Rate	0.75 gpm
Shipping Weight	Approximately 2.0 lbs.

F-201R Chemical & Mechanical Reduction Filter Specifications: This cartridge provides mechanical and chemical reduction of dirt/rust, chlorine taste and odor, and particulates.



System Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of Chlorine taste and odor.

Pressure: 20-120 psi
Temperature: 33°F - 100°F
Flow Rate: 0.75 gpm
Capacity: 500 gallons

REPLACEMENT ELEMENT

Filter Capacity: 500 gallons, depending on local water conditions. Note that while the testing was performed under standard laboratory conditions, actual performance may vary. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. For cold water use only. Systems must be installed and operated in accordance with the Manufacturer's recommended procedures and guidelines. See warranty card for warranty. For service and parts, contact your local dealer or InSinkEerator® directly at 1-800-558-5700.

Contaminant Reduction	Average Influent ppm	Influent Challenge Concentration, Except As Noted, Units Apply to Each Row.	Avg. Product Water ppm	Average % Reduction	NSF Red. Requirements	NSF Test
Chlorine, Taste and Odor	2.1	2.0 mg/L \pm 10%	0.07	96.6	> 50%	516345-05

Application guidelines/Water Supply Parameters for NSF Testing: Service flow of 0.75 gpm, community or private well water supply, water pressure of 20-120 psi, water temperature of 33°F-100°F. Except as noted, all testing performed at pH = 7.5 \pm 0.5, Flow: 0.75 gpm, Pressure: 60 psi, Temp: 20° \pm 3°C.

Contact an authorized InSinkEerator service agent for repairs or replacement components.



EMERSON™
Appliance Solutions

The Emerson logo is a trademark and service mark of Emerson Electric Co.

InSinkEerator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right of change or discontinue models.

© 2009 InSinkEerator, a division of Emerson Electric Co. All Rights Reserved.