

Speed Queen® Multi-Housing

Quantum® Commercial Front Load Washer

Front Control

Pump Drain




ENERGY STAR® Certified

BUILT FOR RELIABLE PERFORMANCE

- Secured coin vaults with integrated meter case (coin only)
- Suspension with out-of-balance logic
- Industry leading 1200 spin speed exerts 440 g-force extraction
- U.S. DOE compliance for energy and water efficiencies
- Commercial-grade stainless steel washtub
- Extra-wide 15.5" door opening and 180° door swing
- Four compartment supply dispenser
- ADA compliant

QUANTUM CONTROL


- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Cycle modifier selection
- Card and coin transactions
- Wash Alert™ with Service Alert capable

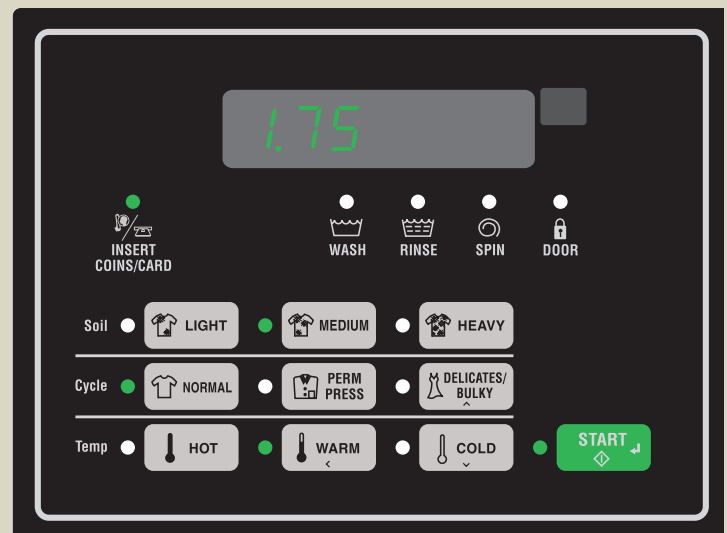

QUANTUM® COMMERCIAL FRONT LOAD WASHER SPECIFICATIONS

MODELS AND ACTIVATION (NOTE: COIN BOX SOLD SEPARATELY)	SFNNCASP113TW01	SFNNCAJP113TW01	SFNNYASP113TW01	SFNNYJ113TW01	SFNWYASP113TW01	SFNNXASP113TW01
Available Control Location	Front	Front	Front	Front	Front	Front
Activation Type	Coin Installed	Coin Installed	Prep for Card	Prep for Card	Prep for Card	Prep for Coin
Capacity - lb (kg)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)	21.5 (9.5)
Cylinder Volume - cu. Ft. (liters)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)	3.42 (96.8)
Width - in (mm)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)	27 3/4 (704)
Height - in (mm)	44 3/8 (1126)	44 3/8 (1126)	44 3/8 (1126)	44 3/8 (1126)	44 3/8 (1126)	44 3/8 (1126)
Spin Speed G-Force (RPM)	440 (1200)	440 (1200)	440 (1200)	440 (1200)	440 (1200)	440 (1200)
Motor Size (Variable Speed Induction) - HP (kw)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)	0.9 (0.67)
Water Consumption per Cycle - g (liter)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)
WF (Water Factor) gal/ft³ (Liters/Liter/cycle)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)
MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Normal, Perm Press, Delicates/Bulky					
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes	Yes	Yes	Yes	Yes
Cylinder Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Available Colors	White	White	White	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp					
Net Weight - lb (kg)	270 (122.5)	270 (122.5)	270 (122.5)	270 (122.5)	270 (122.5)	270 (122.5)
Shipping Weight - lb (kg)	290 (131.5)	290 (131.5)	290 (131.5)	290 (131.5)	290 (131.5)	290 (131.5)
Shipping Width - in (mm)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)
Supply Injection	--	Yes	--	Yes	--	--
Wireless Network Board	--	--	--	--	Yes	--
Available Agency Approvals	cULus	cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

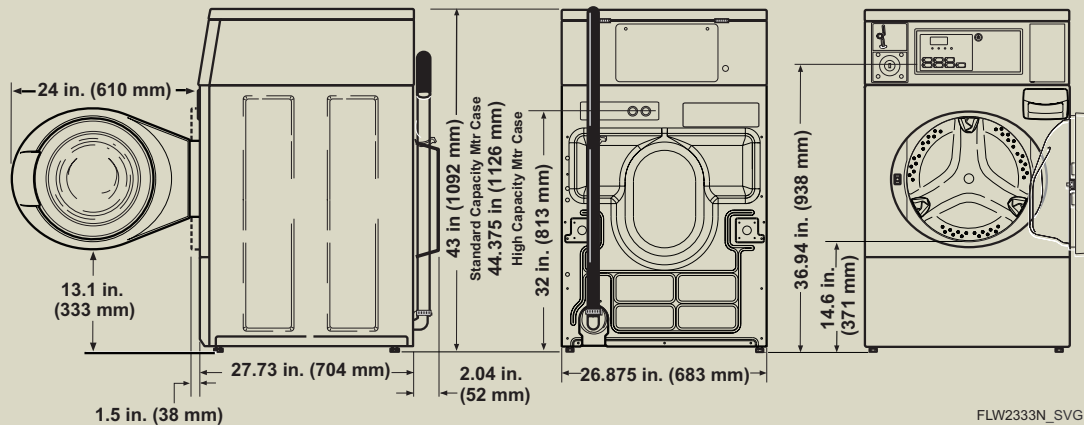

Call us: 800-345-5649

Visit website: speedqueen.com/route

© 2016 Alliance Laundry Systems LLC | AM16-0740