

Speed Queen® Multi-Housing

Quantum® Commercial Single Load Dryer

Front Control




BUILT FOR RELIABLE PERFORMANCE

- Secured coin vault meter case (coin only)
- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- ADA compliant
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

QUANTUM CONTROL

- Secured automated audits
- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Individual cycle modifier keys
- Card and coin transactions
- Wash Alert™ with Service Alert capable

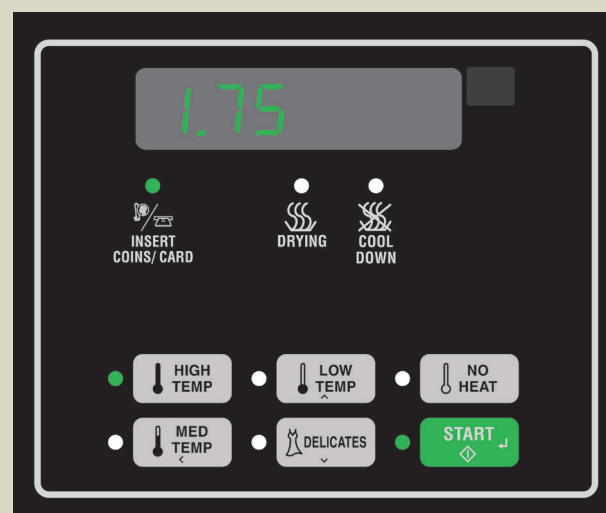


QUANTUM[®] COMMERCIAL SINGLE LOAD DRYER SPECIFICATIONS

MODELS AND ACTIVATION {NOTE: COIN BOX SOLD SEPARATELY}	SDENCAGS173TW01 SDGNCAGS113TW01	SDENYAGS173TW01 SDENYAGS153TW01 SDGNYAGS113TW01	SDENYAGS173TW01 SDENYAGS153TW01 SDGNYAGS113TW01
Available Control Location	Front	Front	Front
Activation Type	Coin Installed	Prep for Card	Prep for Card
Capacity - lb (kg)	18 (8.2)	18 (8.2)	18 (8.2)
Cylinder Volume - cu. Ft. (liters)	7.0 (198)	7.0 (198)	7.0 (198)
Width - in (mm)	26 7/8 (683)	26 7/8 (683)	26 7/8 (683)
Depth - in (mm)	28 (711)	28 (711)	28 (711)
Height - in (mm)	44 3/8 (1126)	44 3/8 (1126)	44 3/8 (1126)
Motor Size (Variable Speed Induction) - HP (kw)	1/3 (0.25)	1/3 (0.25)	1/3 (0.25)
Available Heat Sources	Electric or Gas	Electric or Gas	Electric or Gas
Available Heating Element - (Electric)	5350W, 240V	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V
Gas Inlet Connection - in (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
Gas Consumption - BTU/Hr	25,000	25,000	25,000
Exhaust Outlet Dia. - in (mm)	4 (102)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	220 (105)
Available Cycles	High, Medium, Low, Delicate, No Heat	High, Medium, Low, Delicate, No Heat	High, Medium, Low, Delicate, No Heat
Cycle Indicator Lights	Yes	Yes	Yes
Cylinder Finish	Galvanized	Galvanized	Galvanized
Available Colors	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	Elec 240/60/1 30 amp* Gas 120/60/1 15 amp	Elec 240/60/1 30 amp* 208/60/1 30 amp Gas 120/60/1 15 amp	Elec 240/60/1 30 amp* 208/60/1 30 amp Gas 120/60/1 15 amp
Net Weight - lb (kg)	Elec 150 (68) Gas 155 (70)	Elec 150 (68) Gas 155 (70)	Elec 150 (68) Gas 155 (70)
Shipping Weight - lb (kg)	Elec 160 (73) Gas 165 (75)	Elec 160 (73) Gas 165 (75)	Elec 160 (73) Gas 165 (75)
Shipping Width - in (mm)	29 (737)	29 (737)	29 (737)
Shipping Depth - in (mm)	32 3/4 (832)	32 3/4 (832)	32 3/4 (832)
Shipping Height - in (mm)	45 1/2 (1156)	45 1/2 (1156)	45 1/2 (1156)
Available Agency Approvals	Elec cULus Gas cCSAus	Elec cULus Gas cCSAus	Elec cULus Gas cCSAus

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

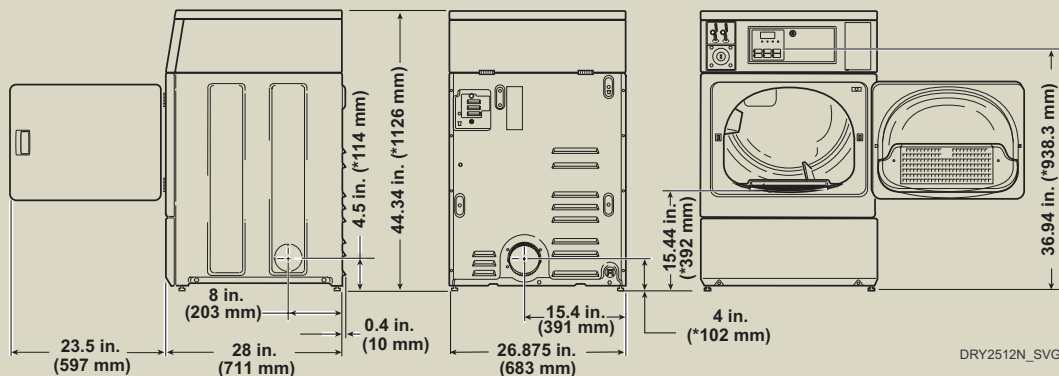

*With leveling legs turned into base.

NOTE: Exhaust openings are 102 mm (4 inch) metal ducting