

Speed Queen® Multi-Housing

Quantum® Commercial Stack Washer/Dryer

Front Control



BUILT FOR RELIABLE PERFORMANCE


- Secured coin vaults with integrated meter case (coin only)
- U.S. DOE compliance for energy and water efficiencies
- ADA compliant (washer only)
- Suspension with out-of-balance logic
- Industry leading 1200 spin speed exerts 440 G-force extraction
- Extra-wide 15.5" door opening and 180° door swing
- Four compartment supply dispenser
- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured








ENERGY STAR® Certified Washer

QUANTUM CONTROL

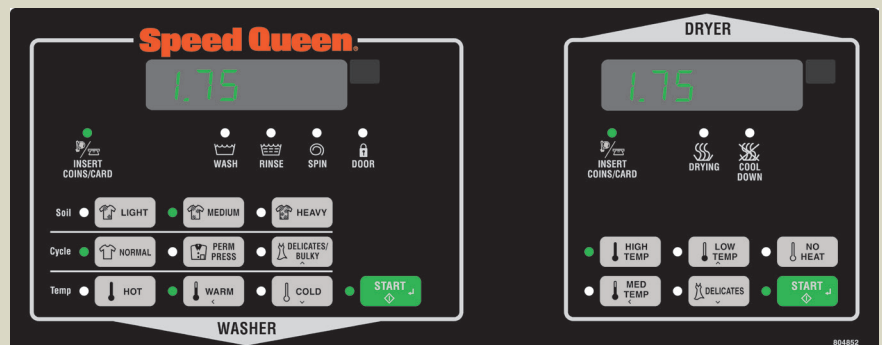- Secured automated audits
- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Individual cycle modifier keys
- Card and coin transactions
- Wash Alert™ with Service Alert capable




QUANTUM® COMMERCIAL STACK WASHER/DRYER SPECIFICATIONS

MODELS and ACTIVATION {NOTE: Coin Box Sold Separately}	STENCASP173TW01 STGNCASP113TW01	STENYASP173TW01 STGNYASP113TW01	STEWYASP173TW01 STGWYASP113TW01	STENXASP173TW01 STGNXASP113TW01	STGNXASG 113TW01
	 Coin "C"	 Prep Card "Y"	 Prep Card "Y"	 Prep Coin "X"	 Prep Coin "X"
Appearance					
Color	White	White	White	White	White
Meter Case	High Capacity	--	--	High Capacity	High Capacity
Water and Energy Info					
Modified Energy Factor "MEF" ft³/kWh/cycle (Liters/kWh/cycle)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)	2.98 (84.48)
Water Factor "WF" - gal/ft³ (Liters/Liter/cycle)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)	3.8 (0.52)
Water Consumption - gal (Liter)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)	11.7 (44.3)
Technical Info					
Weight - lb (kg)	390 (176.9)	390 (176.9)	390 (176.9)	390 (176.9)	390 (176.9)
Shipping Weight - lb (kg)	425 (192.8)	425 (192.8)	425 (192.8)	425 (192.8)	425 (192.8)
Electrical Requirements*	Elec	120/240/60/1 30 amp	120/240/60/1 30 amp	120/240/60/1 30 amp	120/240/60/1 30 amp
	Gas	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp	120/60/1 15 amp
Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 27 3/4 (704) x 78 3/16 (1986)					
Washer - Stainless Steel Basket Volume - cu. ft. (liters): 3.42 (96.8)					
Motor	0.9 HP 671 W	0.9 HP 671 W	0.9 HP 671 W	0.9 HP 671 W	0.9 HP 671 W
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	20-120 (1.4-8.3)
Spin Speeds - RPM	500, 800, 1200	500, 800, 1200	500, 800, 1200	500, 800, 1200	500, 800, 1200
Drain	Pump	Pump	Pump	Pump	Gravity
Dryer - Galvanized Cylinder Volume - cu. ft. (liters): 7.0 (198)					
Air Outlet Diameter - in (mm)	4 (102)	4 (102)	4 (102)	4 (102)	4 (102)
Exhaust Airflow - cfm (liters/sec)	220 (105)	220 (105)	220 (105)	220 (105)	220 (105)
Cycle Temperatures - High, Medium, Low, Delicate, No Heat					
Heating Element	Elec	5350W, 240V	5350W, 240V	5350W, 240V	5350W, 240V
	Gas	25,000 Btu	25,000 Btu	25,000 Btu	25,000 Btu
Wireless Network Board Installed	--	--	Yes	--	--
Motor	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps
Performance/Features					
Top and Lower Unit Factory Assembled	Yes	Yes	Yes	Yes	Yes
Agency Approval	Elec	cULus	cULus	cULus	cULus
	Gas	cCSAus	cCSAus	cCSAus	cCSAus

* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit.

** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

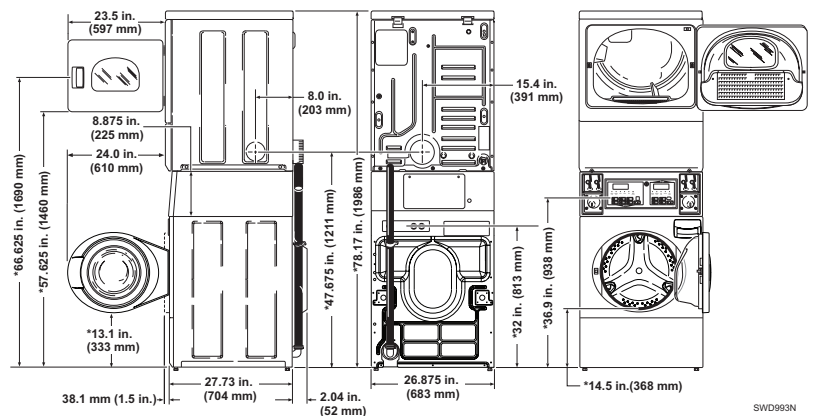

*With leveling legs turned into base.
NOTE: Exhaust openings are 10.2 mm (4 inch) metal ducting.

SWD993N

