

Speed Queen® Multi-Housing

Micro Display Commercial Top Load Washer

Rear Control



BUILT FOR RELIABLE PERFORMANCE

- Dependable Eversmooth transmission
- Touch pad selector
- U.S. DOE compliance for energy and water efficiencies
- Extract speed of 710 RPMs spins clothes out drier
- 210° agitation stroke delivers superior washability
- Commercial-grade stainless steel or porcelain enamel washtub
- Automatic balancing suspension system

MICRO DISPLAY CONTROL


- Easy-to-read digital display
- Cycle programming flexibility
- Shows cycle time remaining
- Card and coin transactions



MICRO DISPLAY COMMERCIAL TOP LOAD WASHER SPECIFICATIONS

MODELS (NOTE: COIN BOX SOLD SEPARATELY)	SWNBC2PP112TW01	SWNBC2SP112TW01	SWNBC2PP112TW02	SWNBV2PP112TW01	SWNBV2SP112TW01	SWNBX2SP112TW01	SWNBX2PP112TW02
Available Control Location	Rear	Rear	Rear	Rear	Rear	Rear	Rear
Activation Type	Coin Installed	Coin Installed	Coin Installed	Prep for Card	Prep for Card	Prep for Coin	Prep for Coin
Meter Case	Standard	Standard	High Capacity	--	--	Standard	High Capacity
Capacity - lb (kg)	16 (7.3)	16 (7.3)	16 (7.3)	16 (7.3)	16 (7.3)	16 (7.3)	16 (7.3)
Cylinder Volume - cu. Ft. (liters)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)	3.26 (92.3)
Width - in (mm)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)
Depth - in (mm)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)
Height - in (mm)	43 (1092)	43 (1092)	43 (1092)	43 (1092)	43 (1092)	43 7/8 (1114)	43 (1092)
Spin Speed G-Force (RPM)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)
Motor Size - HP (kw)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)
Water Consumption per Cycle - g (liter)	26 (98.4)	26 (98.4)	26 (98.4)	26 (98.4)	26 (98.4)	26 (98.4)	26 (98.4)
WF (Water Factor) gal/ft ³ (Liters/Liter/cycle)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)	8.4 (1.12)
MEF (Modified Energy Factor) ft ³ /kWh/cycle (Liters/kWh/cycle)	1.70 (48.14)	1.70 (48.14)	1.70 (48.14)	1.70 (48.14)	1.70 (48.14)	1.70 (48.14)	1.70 (48.14)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Normal, Perm Press, Delicate						
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cylinder Finish	Porcelain	Stainless Steel	Porcelain	Porcelain	Stainless Steel	Stainless Steel	Porcelain
Available Colors	White	White	White	White	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp	120/60/1 - 15 Amp
Net Weight - lb (kg)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)
Shipping Weight - lb (kg)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)
Shipping Width - in (mm)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)
Shipping Depth - in (mm)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)
Shipping Height - in (mm)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)
Available Agency Approvals	cULus	cULus	cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

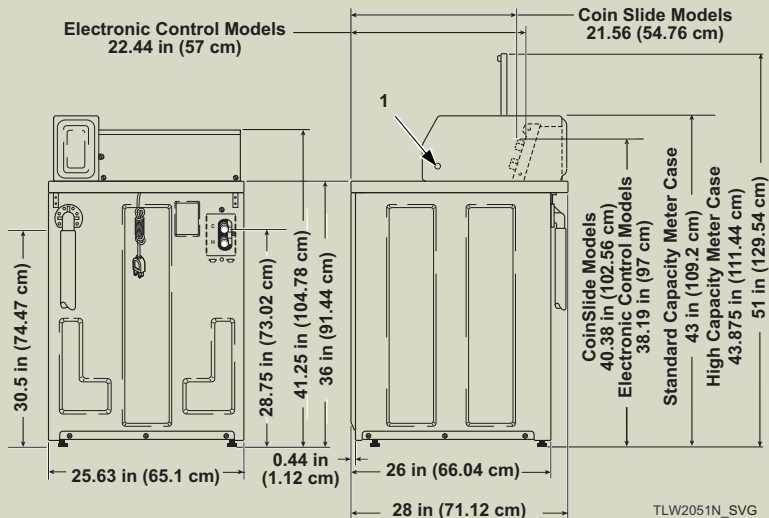

Call us: 800-345-5649

Visit website: speedqueen.com/route

© 2016 Alliance Laundry Systems LLC | AM16-0358