1215WC • 15" Wine Captain® Model • 1000 Series

FEATURES & BENEFITS

PERFORMANCE	
	• Volume of 2.9 cu ft holds up to 24 wine bottles (750 ml)
	• Digital Touch Pad Control is conveniently located on upper face of unit
	• Temperature range: 38°F - 65°F
	• Digital passive cooling system
	• Maintains temperature to within 1°F of the set point to maximize preservation
	• Relative humidity inside the unit is approx. 50%
	• Rubber mounted compressor virtually eliminates vibration

INTERIOR/EXTERIOR

- Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours
- Three-quarter extension black vinyl wine racks with natural beech wood fronts allow for easy access and prevent bottles from shifting
- Wine racks accommodate a variety of bottle shapes and sizes, while the fourth and fifth racks allow for larger diameter wine and champagne bottles
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Standard commercial stainless steel handle is interchangeable with professional handle accessory
- Door swing is field reversible

INTEGRATION

- Unit is designed to be built-in or can be freestanding
- Solid natural beech wood fronts on wine racks can easily be stained to match surrounding cabinetry
- Integrated model requires ¾" custom door panel
- Four independently adjustable leveling legs provide a precise undercounter fit
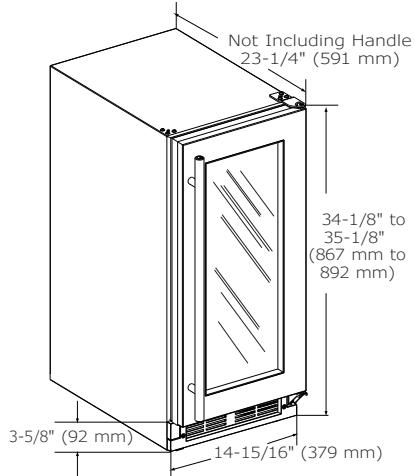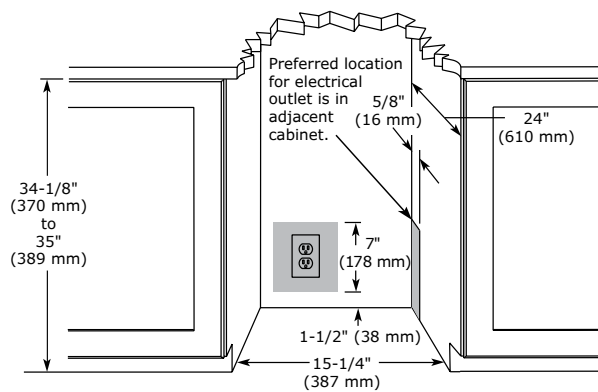- Available in the following finishes: Stainless, Integrated, or Black

STAINLESS FRAME

INTEGRATED FRAME

BLACK FRAME

MODEL DETAILS

Model	Voltage	Door Swing	Finish	Shipping Weight
U-1215WCS-00A	115	Field Reversible	Stainless Frame	102 lbs
U-1215WCINT-00A	115	Field Reversible	Integrated Frame	99 lbs
U-1215WCB-00A	115	Field Reversible	Black Frame	102 lbs

ACCESSORIES

Model	Description	Finish	Shipping Weight
23074	Professional Door Handle, 1 ¼" Diameter	Stainless	2 lbs
23073	Commercial Door Handle, ⅞" Diameter	Stainless	2 lbs

1000 Series • 15" Wine Captain® Model • **1215WC**

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with ¾" overlay panel/frame installed.

Not Including Handle
23-1/4" (591 mm)

34-1/8" to 35-1/8" (867 mm to 892 mm)

3-5/8" (92 mm)

14-15/16" (379 mm)

CABINET CUT-OUT

Preferred location for electrical outlet is in adjacent cabinet.

5/8" (16 mm)

24" (610 mm)

34-1/8" (370 mm) to 35" (389 mm)

7" (178 mm)

1-1/2" (38 mm)

15-1/4" (387 mm)

SPECIFICATIONS

Model	1215WC
Amps: Running	1.2
Capacity: Volume (cu ft)	2.9
Capacity: Wine Bottle (750 ml)	24
Control Type	Digital Touch Pad
Dimensions: Product Depth	23 ¼" / 591 mm
Dimensions: Product Height	34 ⅛" / 867 mm
Dimensions: Product Width	14 $^{15}/_{16}$" / 379 mm
Energy Consumption: Avg. Per Year	250 kWh
ENERGY STAR	na
Product Weight: Max	95 lbs
Refrigerant Type	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	38°F - 65°F

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 ½" clearance on hinged side for 90° door opening

Cutout includes the additional ¼" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

COOLING SYSTEM

38°-65°

ELECTRICAL REQUIREMENTS

This unit requires a grounded a polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).

UL
Residential & Commercial

Please visit u-line.com to view this model's User Guide. All specifications are subject to change without notice.