

1224DWR • 24" Solid Refrigerator Drawers • 1000 Series

FEATURES & BENEFITS



STAINLESS
SOLID



INTEGRATED
SOLID

PERFORMANCE	<ul style="list-style-type: none">• Volume of 5.4 cu ft holds up to 98 bottles (12 oz) or 150 cans (12 oz)• Digital Touch Pad Control• Temperature range: 34°F - 45°F• Passive cooling system
INTERIOR/EXTERIOR	<ul style="list-style-type: none">• Black interior is illuminated with LED lighting• Equipped with 2 full-extension robust stainless drawers• Standard commercial stainless steel handle is interchangeable with professional handle accessory• The lower drawer is large enough to fit 2 one-gallon containers with additional space for more storage
INTEGRATION	<ul style="list-style-type: none">• Unit is designed to be built-in or can be freestanding with the freestanding accessory kit• Integrated model requires 3/4" custom door panel (panels not supplied by U-Line)• Four independently adjustable leveling legs provide a precise undercounter fit• Available in the following finishes: Stainless or Integrated

MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-1224DWRS-00B	115 / 60	Drawers	Stainless Solid	142 lb
U-1224DWRINT-00B	115 / 60	Drawers	Integrated Solid	134 lb


ACCESSORIES

Model	Description	Finish	Shipping Weight
80-54289-00	Commercial Drawer Handle, 7/8" Diameter	Stainless	2 lb
80-54462-00	Professional Drawer Handle, 1 1/4" Diameter	Stainless	2 lb
U-FSK-B	Freestanding Kit	Black	3 lb
80-54362-00	1k Top Drawer Slide and Divide Bin Organizer	N/A	3 lb


1000 Series • 24" Solid Refrigerator Drawers • 1224DWR

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with ¾" integrated panel/frame installed.

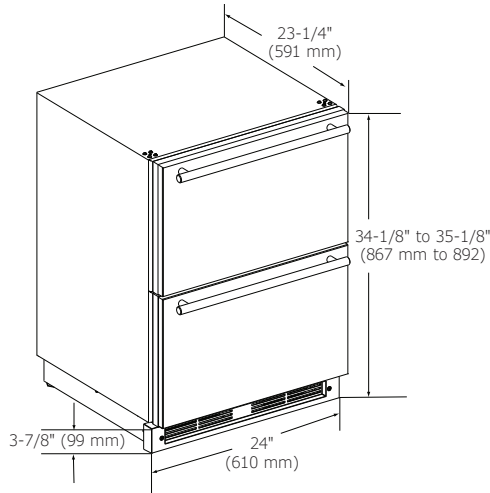

CABINET CUT-OUT

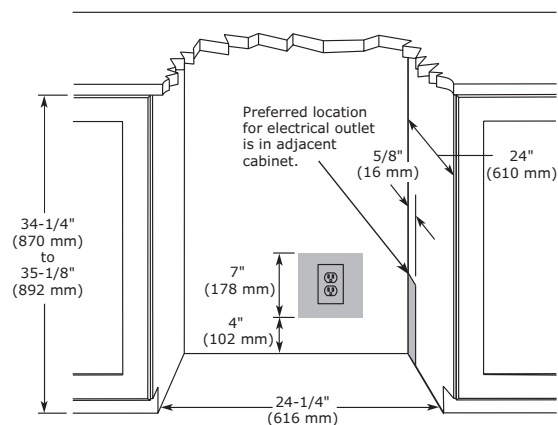

INSTALLATION NOTES

Cutout includes the additional ¼" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

SPECIFICATIONS

Model	1224DWR
Amps: Running	1.2
Capacity: Bottle (12 oz)	98
Capacity: Can (12 oz)	150
Capacity: Volume (cu ft)	5.4
Control Type	Digital Touch Pad
Dimensions: Product Depth	23 ¼" / 591 mm
Dimensions: Product Height	34 ⅛" / 867 mm
Dimensions: Product Width	24" / 610 mm
Energy Consumption: Avg. Per Year	305 kWh
ENERGY STAR	No
Panel Height	15" / 381 mm
Panel Thickness	¾" / 20 mm
Panel Type	Solid Panel
Panel Width	23 ¾" / 603 mm
Product Weight: Max	132 lb
Refrigerant Type	R600a
Sabbath (Star K Certified)	Yes
Temperature Range	34°F - 45°F

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).