

24" Compact Laundry

**Flexible Installation. German Engineering.
Bosch Performance.**





With their sleek design, our matching Bosch 24" compact laundry units offer best in class installation. Stack them in a closet or install them side by side under a kitchen counter. Our extra-fast 24" laundry pairs wash and dry your clothes in 30 minutes.

24" Compact Washers



300 Series WAT28400UC

- SpeedPerfect™ Provides Up to 40% Faster Washing Time*
- EcoSilence™ Motor Delivers Quiet, Efficient Performance
- Anti-vibration Circular Side Walls Reduce Vibration
- ENERGY STAR® Qualified



500 Series WAT28401UC

- + AquaShield® Provides Protection Against Water Damage
- + Sanitize Cycle Heats Water to Kill Bacteria
- + Washes Up to 18 Towels in One Load
- + Lower Noise 52 / 72 dBA (washing / spinning)



800 Series WAT28402UC

- + Wash 5 Men's Dress Shirts In Just 15 Minutes
- + AquaStop® Plus provides Extra Protection Against Water Damage
- + Interior LED Light
- + Lowest Noise 50 / 71 dBA (washing / spinning)



+ Indicates a step-up feature


	300 Series	500 Series	800 Series
	White – WAT28400UC	White – WAT28401UC	White – WAT28402UC
General Properties			
Tub material	Stainless Steel	Stainless Steel	Stainless Steel
Maximum spin speed (rpm)	1,400	1,400	1,400
Interior light	No	No	Yes (LED)
Leak protection systems	Reinforced Hose	AquaShield® Hose	AquaStop® Plus Hose & Sensor
Internal water heater	Yes	Yes	Yes
Stackable	Yes	Yes	Yes
Silence level – washing (dBA)	54	52	50
Silence level – spinning (dBA)	73	72	71
Special cycles	Allergen, Jeans, Heavy Duty, SpeedPerfect™, PreWash	Bulky/Large Items, Towels, SpeedPerfect™, PreWash	Super Quick 15, Whitest Whites, SpeedPerfect™, PreWash
Energy consumption (kWh / yr)	84	84	84
Water consumption (gal / yr)	2,320	2,320	2,320
ENERGY STAR® qualified	Yes	Yes	Yes
Capacity			
Capacity (cu. ft.)	2.2	2.2	2.2
Relative load	16 bath towels	18 bath towels	18 bath towels
Design Elements			
Door ring	White	Silver	Chrome
Control type	Touch	Touch	Touch
Dial	White	Silver	Chrome
Technical Details			
Watts (W)	2,300	2,300	2,300
Circuit breaker if plugged into an individual circuit (A)	20	20	20
Volts (V)	208 / 220 – 240	208 / 220 – 240	208 / 220 – 240
Frequency (Hz)	60	60	60
Plug type	240V; NEMA 6 – 15 (3 prong)	240V; NEMA 6 – 15 (3 prong)	240V; NEMA 6 – 15 (3 prong)
Power cord included	Yes	Yes	Yes
Power cord length (in)	63" (Full Length)	63" (Full Length)	63" (Full Length)
Drain hose length (in)	57" (Full Length)	57" (Full Length)	57" (Full Length)
Inlet hose length (in)	47" (Full Length)	59" (Full Length)	59" (Full Length)
Door hinge	Left Side (Not Reversible)	Left Side (Not Reversible)	Left Side (Not Reversible)
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	33 1/4" x 23 1/2" x 24 1/4"	33 1/4" x 23 1/2" x 25"	33 1/4" x 23 1/2" x 25"
Net weight (lbs)	158	160	160
Minimum stack height (in)	67 3/4"	67 3/4"	67 3/4"
ADA compliant	Meets ADA height and access requirements when installed on pedestal and ADA operable parts requirements for controls and detergent dispenser		

* As compared to Perm Press Heavy Soil cycle without SpeedPerfect

24" Compact Washers


300 Series Dimensions and Installation

Dimensions in inches

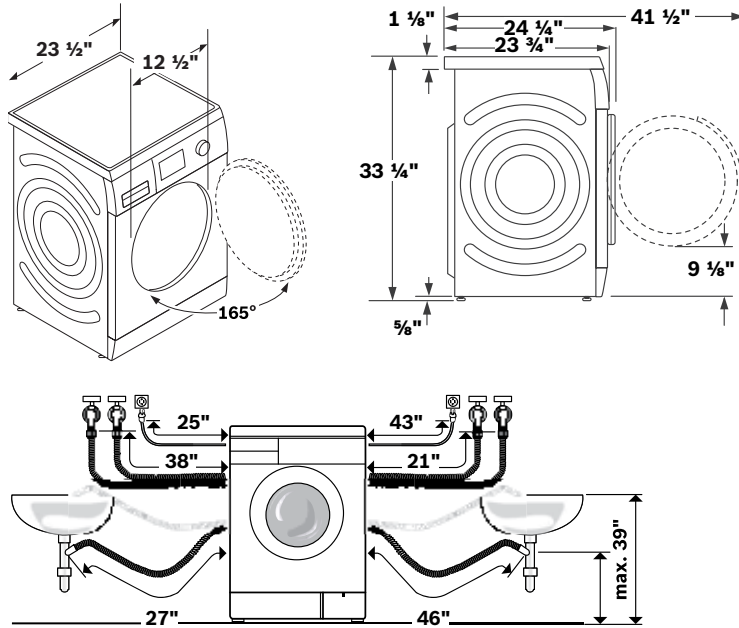

500 Series and 800 Series Dimensions and Installation

Dimensions in inches

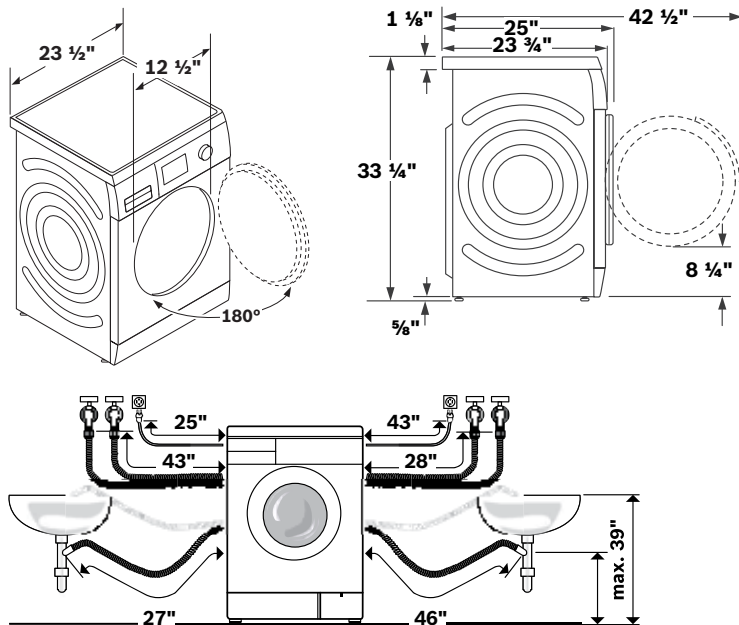


Optional Accessories


WMZ20490
16" Pedestal

P/N 645787
(500 & 800 Series)
Short Stainless Steel Hose (If needed for plumbing box clearance with AQS hose)


300 Series, 500 Series and 800 Series

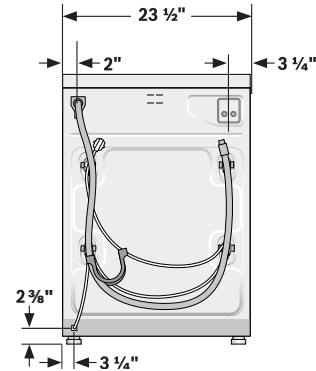

300 Series, 500 Series and 800 Series Washer plugged into the dryer

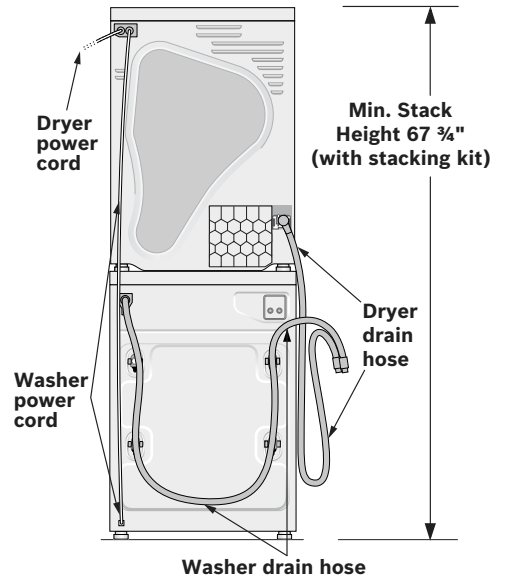

Optional Pedestal

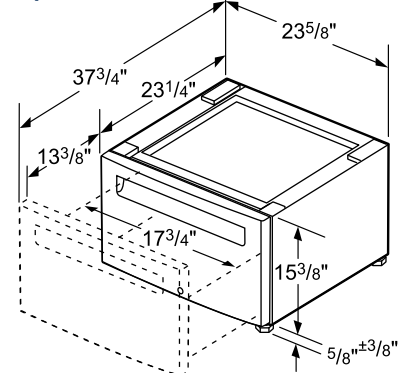

NOTE: See page 186 for details on installing under counter or in a closet.

24" Compact Dryers



300 Series
WTG86400UC

- Washer Plugs into Dryer for Easy Installation
- Dries Up to 16 Towels in One Load
- Intelligent Sensors Prevent Overheating
- Anti-vibration Circular Side Walls Reduce Vibration
- Low Noise 67 dBA



500 Series
WTG86401UC

- + Reversible Door
- + Stainless Steel Drum
- + Dries Up to 18 Towels in One Load
- + ENERGY STAR® Qualified
- + Lower Noise 65 dBA
- + Bulky / Large Items Cycle



800 Series
WTG86402UC

- + SuperQuick 15 minute Cycle
- + Chrome Dial and Door Trim Design
- + Interior LED Light
- + Lowest Noise 63 dBA
- + AntiShrink Cycle




+ Indicates a step-up feature

	300 Series	500 Series	800 Series
	White – WTG86400UC	White – WTG86401UC	White – WTG86402UC
General Properties			
Dryer type	Condensing	Condensing	Condensing
Drum material	Galvalume	Stainless Steel	Stainless Steel
Interior light	No	No	Yes (LED)
Ventless drying (no ducting)	Yes	Yes	Yes
Stackable	Yes	Yes	Yes
Silence level (dBA)	67	65	63
Special cycles	Jeans, Heavy Duty, Dry Level, Finished In	Bulky / Large Items, Towels, Dry Level, Finished In	Super Quick 15, AntiShrink, Dry Level, Finished In
Energy consumption (kWh / yr)	320	311	311
ENERGY STAR® qualified	No	Yes	Yes
Capacity			
Capacity (cu. ft.)	4.0	4.0	4.0
Relative load	16 bath towels	18 bath towels	18 bath towels
Design Elements			
Door ring	White	Silver	Chrome
Control type	Touch	Touch	Touch
Dial	White	Silver ring with white center	Chrome design, metal material
Technical Details			
Energy source	Electric	Electric	Electric
Watts (W)	2800	2800	2800
Circuit breaker (A)	30	30	30
Volts (V)	208 / 220 – 240	208 / 220 – 240	208 / 220 – 240
Frequency (Hz)	60	60	60
Plug type	240V; NEMA 14 – 30 (4 prong)	240V; NEMA 14 – 30 (4 prong)	240V; NEMA 14 – 30 (4 prong)
Power cord included	Yes	Yes	Yes
Power cord length (in)	63" (Full Length)	63" (Full Length)	63" (Full Length)
Drain hose length (in)	78" (Full Length)	78" (Full Length)	78" (Full Length)
Door hinge	Right Side (Not Reversible)	Right Side (Reversible)	Right Side (Reversible)
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	33 1/4" x 23 1/2" x 25"	33 1/4" x 23 1/2" x 25"	33 1/4" x 23 1/2" x 25"
Net weight (lbs)	99	99	99
Minimum stack height (in)	67 3/4"	67 3/4"	67 3/4"
ADA compliant	Meets ADA height and access requirements when installed on pedestal and ADA operable parts requirements for controls and lint filter		


24" Compact Dryers

Dryer Dimensions


Dimensions in inches

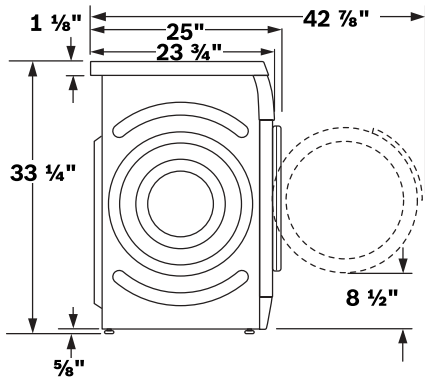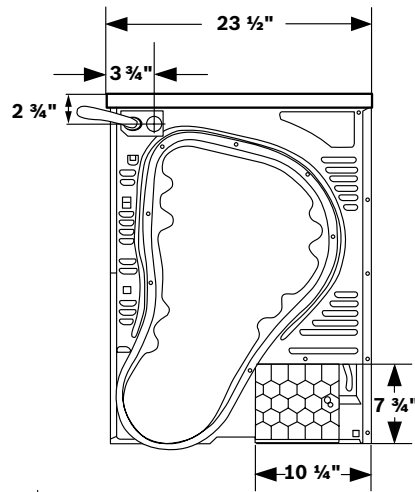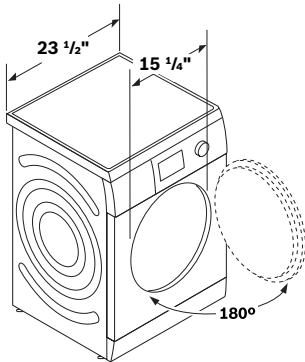

Optional Pedestal

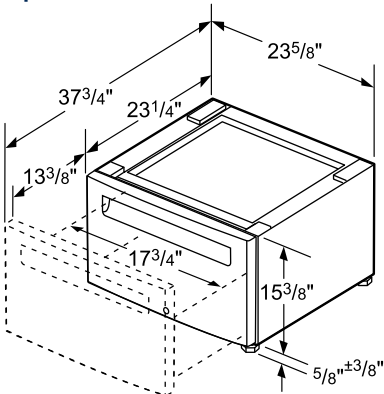

Washer plugged into the dryer

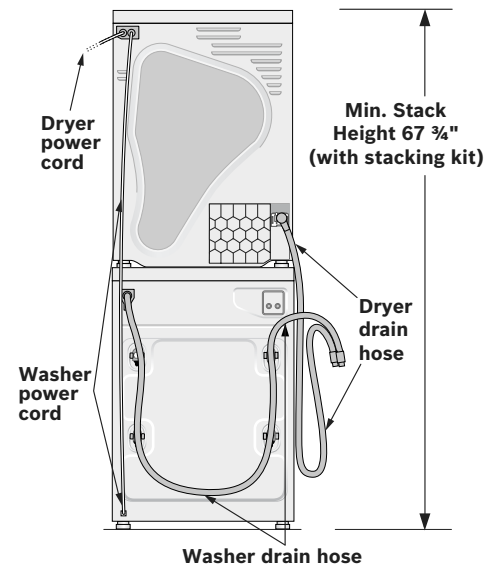

NOTE: See page 186 for details on installing under counter or in a closet.

Optional Accessories

WMZ20500
16" Pedestal

WTZ20410
Stationary Stacking Kit


WTZ11400
Stacking Kit with Pull Out Tray

WMZ20600
Drying Rack

24" Washers and Dryers Installed in Enclosure


Enclosure Dimensions

Under Counter: (Preferred)

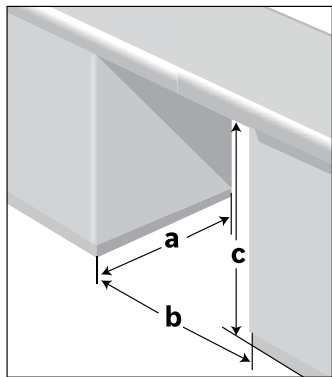

Front of the appliance fully open. No doors or coverings.


Under Counter: (Less Preferred)

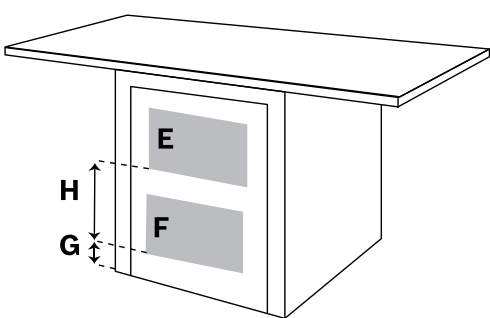


If the front of the appliance is covered, ventilation openings must be installed as shown and front/rear clearances adhered to according to closet installations.

Minimum opening dimensions	
a	28 in.
b	23 7/8 in.
c	34 1/2 in.
E & F are minimum area sizes	
E	63 sq. in.
F	63 sq. in.
G & H actual spacing dimensions for min. open area sizes	
G	3 in.
H	14 in.

Closet: Stacked

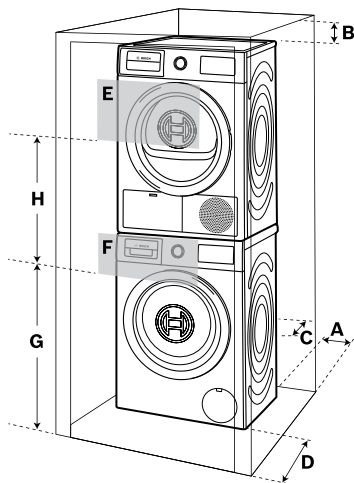

Closet: Stand Alone (shown) or Side by Side

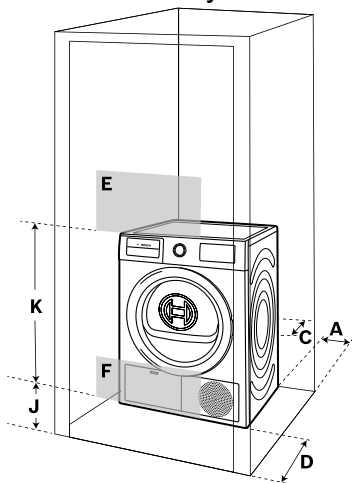

Clearance requirements (Minimum)	
A Both Sides	5/8 in.
B Top	6 1/4 in.
C Rear	2 1/2 in.
D Front	2 1/2 in.
Ventilation Area (Minimum)	
E Top	63 sq. in
F Bottom	63 sq. in.
Vent Spacing	
G	37 in.
H	26 in.
J	3 in.
K	29 in.

Enclosure Dimensions

