

# OWC 1211

<b>Cooling Capacity</b>	BTU/Hr. @ 80°F Air Temperature 85°F Entering Water Temperature	13,500
<b>Dimensions</b>	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds) Shipping Weight	20 13 32 110 130
<b>Electrical Characteristics</b>	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Fuse Size (Amperes) NEMA Plug Configuration Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	115/60/1 Phase 1.05 Cooling 10.5 Cooling 15 5-15P 105-125 Volt 16AWG (3 Core) 10
<b>Compressor Characteristics</b>	Compressor Type R 22 charge (Ounces) Operating Conditions: Min-max °F	Hermetic Rotary 19 55°-105°F, 50% RH
<b>Fan Characteristics</b>	<b>Evaporator:</b> Fan Type 6 Speed Air Flow (CFM) High/Low Max. External Static Pressure (Inches Of Water Gauge)	Centrifugal 400/340 0.15
<b>Condenser Water Flow</b>	Automatic Water Regulating Valve Inlet Water Temp. 85°F–95°F Exit Inlet Water Temp. 75°F–95°F Exit Inlet Water Temp. 65°F–95°F Exit Inlet Water Temp. 55°F–95°F Exit	Yes 3.00 GPM 1.74 GPM 1.17 GPM 0.87 GPM
<b>Miscellaneous Features</b>	Thermostat Built-in Condensate Pump with 20Ft. Lift Check Valve with Safety Switch High-Pressure Switch Water Connections (supply and return) Hose Kits Available 10'–25'–40' Optional Heat Pump Unit Available Optional Tower Application Unit Available Available In 208/230/1 Phase Sound Level (Db) High/Low	Yes Yes Yes Yes All 3/8 Inch MF Yes No Yes Yes 54/52

# OWC 1211

**Power Supply** 115 volts 60 hertz 1 phase 10.5 amperes




**Width** 20 inches

**Depth** 13 inches

**Height** 32 inches

**Weight** (net/shipping) lbs 110/130

All models are backed by a 12-month warranty with 60 months for the compressor.

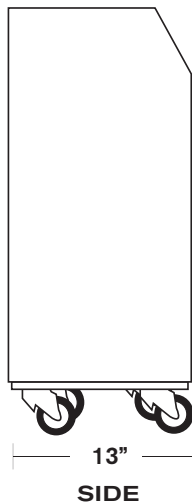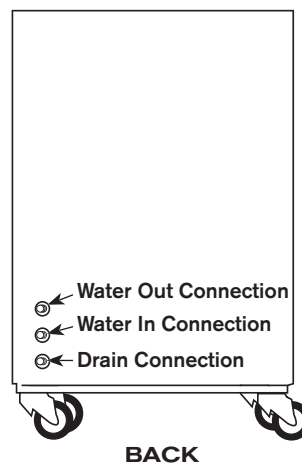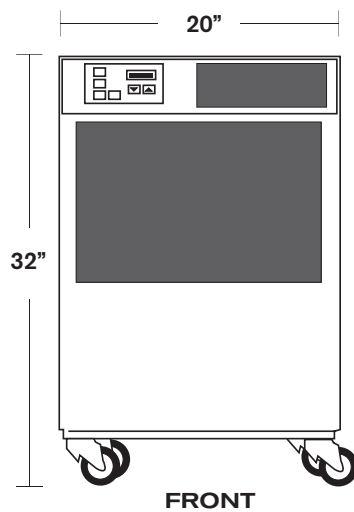

SPOT COOLERS

800.367.8675 • [www.spot-coolers.com](http://www.spot-coolers.com)

Copyright © 2004 Spot Coolers, Inc. All rights reserved.