

OWC 2412

Cooling Capacity	BTU/Hr. @ 80°F Air Temperature 85°F Entering Water Temperature	23,950
Dimensions	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds) Shipping Weight	24 13 38 160 180
Electrical Characteristics	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Fuse Size (Amperes) NEMA Plug Configuration Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/1 Phase 2.0 Cooling 8.6 Cooling 20 6-20P 195-250 Volt 14AWG (3 Core) 10
Compressor Characteristics	Compressor Type R 22 charge (Ounces) Operating Conditions: Min-max °F	Hermetic Rotary 24 55°-105°F, 50% RH
Fan Characteristics	Evaporator: Fan Type 6 Speed Air Flow (CFM) High/Low Max. External Static Pressure (Inches Of Water Gauge)	Centrifugal 810/680 0.25
Condenser Water Flow	Automatic Water Regulating Valve Inlet Water Temp. 85°F–95°F Exit Inlet Water Temp. 75°F–95°F Exit Inlet Water Temp. 65°F–95°F Exit Inlet Water Temp. 55°F–95°F Exit	Yes 6.00 GPM 3.50 GPM 2.34 GPM 1.74 GPM
Miscellaneous Features	Thermostat Built-in Condensate Pump with 20Ft. Lift Check Valve with Safety Switch High-Pressure Switch Water Connections (supply and return) Hose Kits Available 10'–25'–40' Optional Heat Pump Unit Available Optional Tower Application Unit Available Sound Level (Db) High/Low	Yes Yes Yes Yes 3/8 inch MF Yes No Yes 62/60

OWC 2412

Power Supply 208/230 volts 60 hertz 1 phase 8.6 amperes




Width 24 inches

Depth 13 inches

Height 38 inches

Weight (net/shipping) lbs 160/180

All models are backed by a 12-month warranty with 60 months for the compressor.

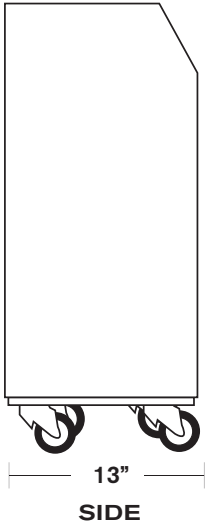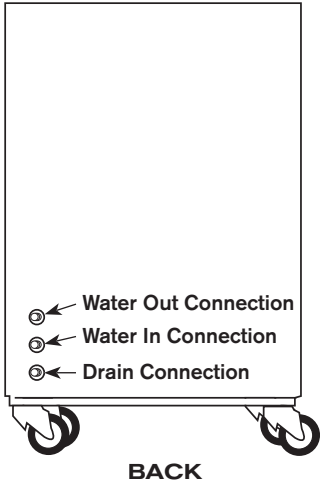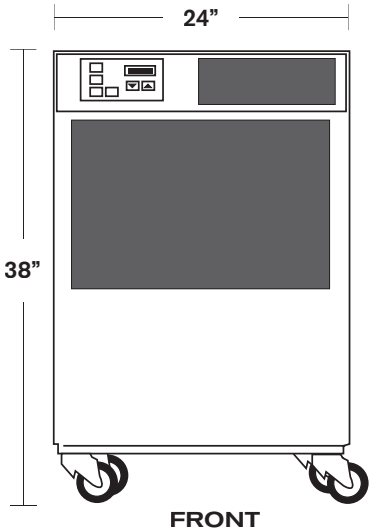

SPOT COOLERS