

# OWC 6012

<b>Cooling Capacity</b>	BTU/Hr. @ 80°F Air Temperature 85°F Entering Water Temperature	60,100
<b>Dimensions</b>	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds) Shipping Weight	29 39 52 460 500
<b>Electrical Characteristics</b>	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Fuse Size (Amperes) NEMA Plug Configuration Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208/230/60/1 Phase 5.4 Cooling 20.7 Cooling 30 6-30P 195-250 Volt 10AWG (3 Core) 10
<b>Compressor Characteristics</b>	Compressor Type R 22 charge (Ounces) Operating Conditions: Min-max °F	Hermetic Scroll 69 55°-105°F, 50% RH
<b>Fan Characteristics</b>	<b>Evaporator:</b> Fan Type 6 Speed Air Flow (CFM) High/Low Max. External Static Pressure (Inches Of Water Gauge)	Centrifugal 1950/1750 0.50
<b>Condenser Water Flow</b>	Automatic Water Regulating Valve Inlet Water Temp. 85°F–95°F Exit Inlet Water Temp. 75°F–95°F Exit Inlet Water Temp. 65°F–95°F Exit Inlet Water Temp. 55°F–95°F Exit	Yes 15.00 GPM 8.70 GPM 5.85 GPM 4.35 GPM
<b>Miscellaneous Features</b>	Thermostat Built-in Condensate Pump with 20Ft. Lift Check Valve with Safety Switch High-Pressure Switch Water Connections (supply and return) Condensate Connection Hose Kits Available 10'–25'–40' Optional Heat Pump Unit Available Optional Tower Application Unit Available Sound Level (Db) High/Low	Yes Yes Yes Yes 5/8 Inch MF 3/8 Inch MF Yes No Yes 69/64

\* available in 208/230/3 phase  
\*\* available in 460/3 phase

# OWC 6012

**Power Supply** 208/230 volts 60 hertz 1 phase 20.7 amperes


**Width** 29 inches

**Depth** 39 inches

**Height** 52 inches

**Weight** (net/shipping) lbs 460/500

All models are backed by a 12-month warranty with 60 months for the compressor.

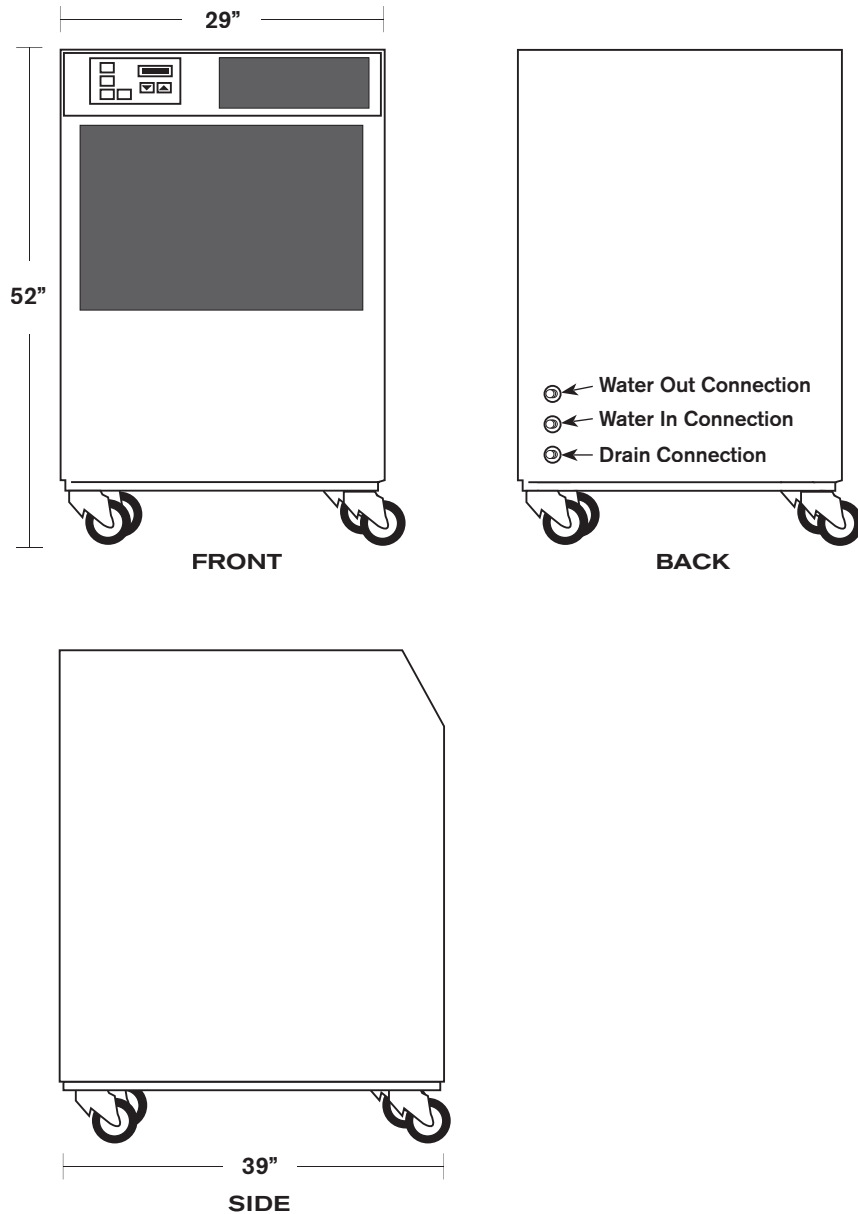

800.367.8675 • [www.spot-coolers.com](http://www.spot-coolers.com)

Copyright © 2004 Spot Coolers, Inc. All rights reserved.

SPOT COOLERS