






OVERALL DIMENSIONS

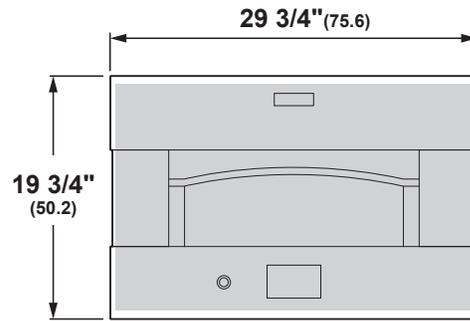

FRONT VIEW

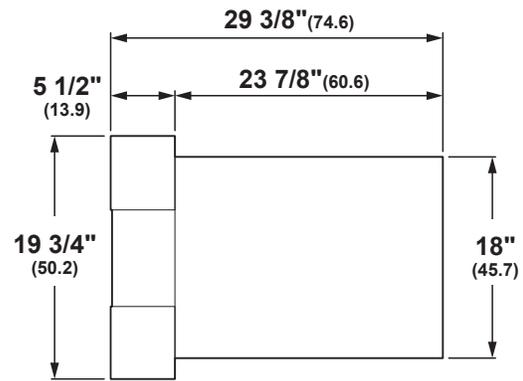

SIDE VIEW

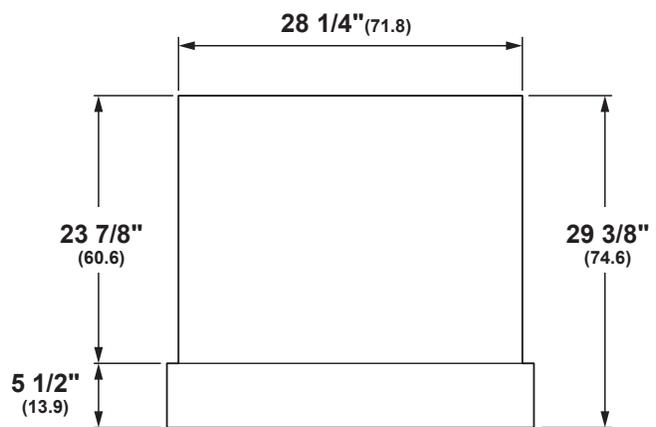

TOP VIEW

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| Overall Width                    | 29 3/4" (75.6 cm)                               |
| Overall Height                   | 19 3/4" (50.2 cm)                               |
| Overall Depth                    | 29 3/8" (74.6 cm)                               |
| Overall Oven Interior Capacity   | 1.45 cu. ft.                                    |
| Oven Interior Dimensions (W x D) | 19.38" x 17.88" (49.2 x 45.4 cm)                |
| Minimum Cabinet Width            | 30" (76.2 cm)                                   |
| Minimum Cabinet Depth            | 24" (61.0 cm)                                   |
| Minimum Base Support             | 200 lbs. (90 kg)                                |
| Cutout Width                     | 28 1/2" (72.4 cm) Min<br>28 5/8" (72.7 cm) Max  |
| Cutout Height                    | 18 1/4" (46.4 cm) Min<br>18 5/16" (46.5 cm) Max |
| Cutout Depth                     | 24" (61.0 cm) Min                               |
| Volts/Hertz/Amps                 | 240/208 V AC, 60 Hz, 50A                        |
| Conduit Length                   | 43"   |
| Electrical Rating                | 10.4 kW at 208V<br>12.0 kW at 240V              |
| Shipping Weight                  | 275 lbs. (124.7 kg)                             |


ATTENTION ELECTRICIAN:

A 240/208V, 60Hz, 50 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

WALL INSTALLATION

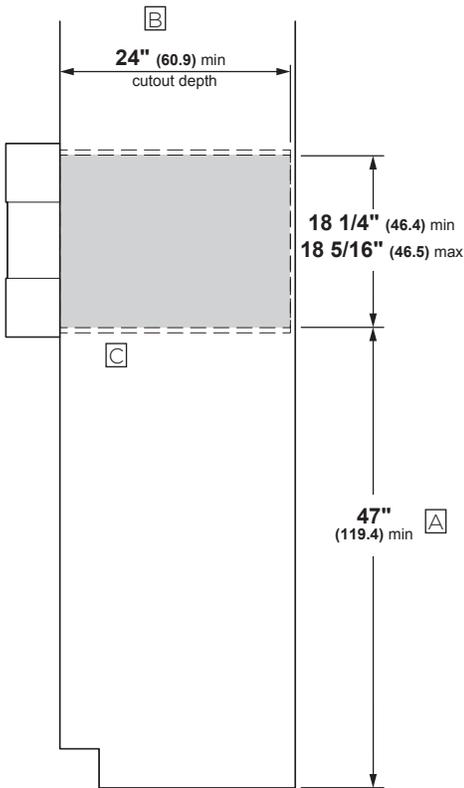

**INSTALLATION  
SIDE VIEW**

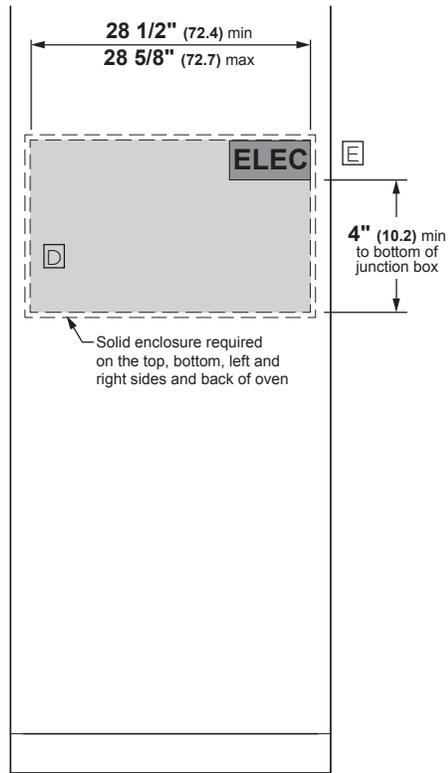

**INSTALLATION  
FRONT VIEW**

NOTES

- A** 47" is the required minimum installation height. Oven may be installed higher based on owner preference.
- B** Back of standard-depth cabinet may need to be removed to install oven at correct depth. Drywall is acceptable as back enclosure.
- C** Platform must be able to support 200 lbs (90 kg)
- D** Solid enclosure required on the top, bottom, left and right sides and back of oven
- E** Junction box location (May also be located in adjacent cabinet)

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.



## FEATURES AND BENEFITS

**HANDCRAFTED LUXURY**

Can be found in every aspect of the design, from the polished stainless exterior to the simple touch controls

**PIZZERIA-QUALITY PERFORMANCE**

Is designed to match the capabilities of the best restaurant pizza ovens to help home chefs achieve the perfect slice

**ELECTRIC HEATING ZONES**

Combine the crisping performance of traditional coal- and wood-burning pizza ovens with the precision and ease of a sophisticated appliance

**CAPACITIVE TOUCH LCD CONTROLS**

Allow for easy selection of preset cooking options, including a variety of pizza settings and choices for roasting vegetables

**BUILT-IN INSTALLATION**

Is made possible with a standard 30"-width cabinet cutout

**INTEGRATED OVEN VENTILATION SYSTEM**

Allows for simple installation, with no additional ductwork required



70 to 90% U.S. content. Product content details at [GEAppliances.com/USA](http://GEAppliances.com/USA)

**MONOGRAM**