

LUCÉ wall


Boasting an elegant slice of sleek stainless steel married with the subtle glamor of ambient lighting in Cloud White, Deep Blue and Amber, the Lucé is the (gorgeous) future of range hoods, here today. Featuring ACT™ technology, Bloom™ LED lighting, ICON Touch™ Controls and a versatile Recirculating Option.

	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™	
Min.-Max. CFM	200 - 600	200 - 390	200 - 290
Min.-Max. Sones	1 - 6	1 - 4	1 - 3

ACT™ is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

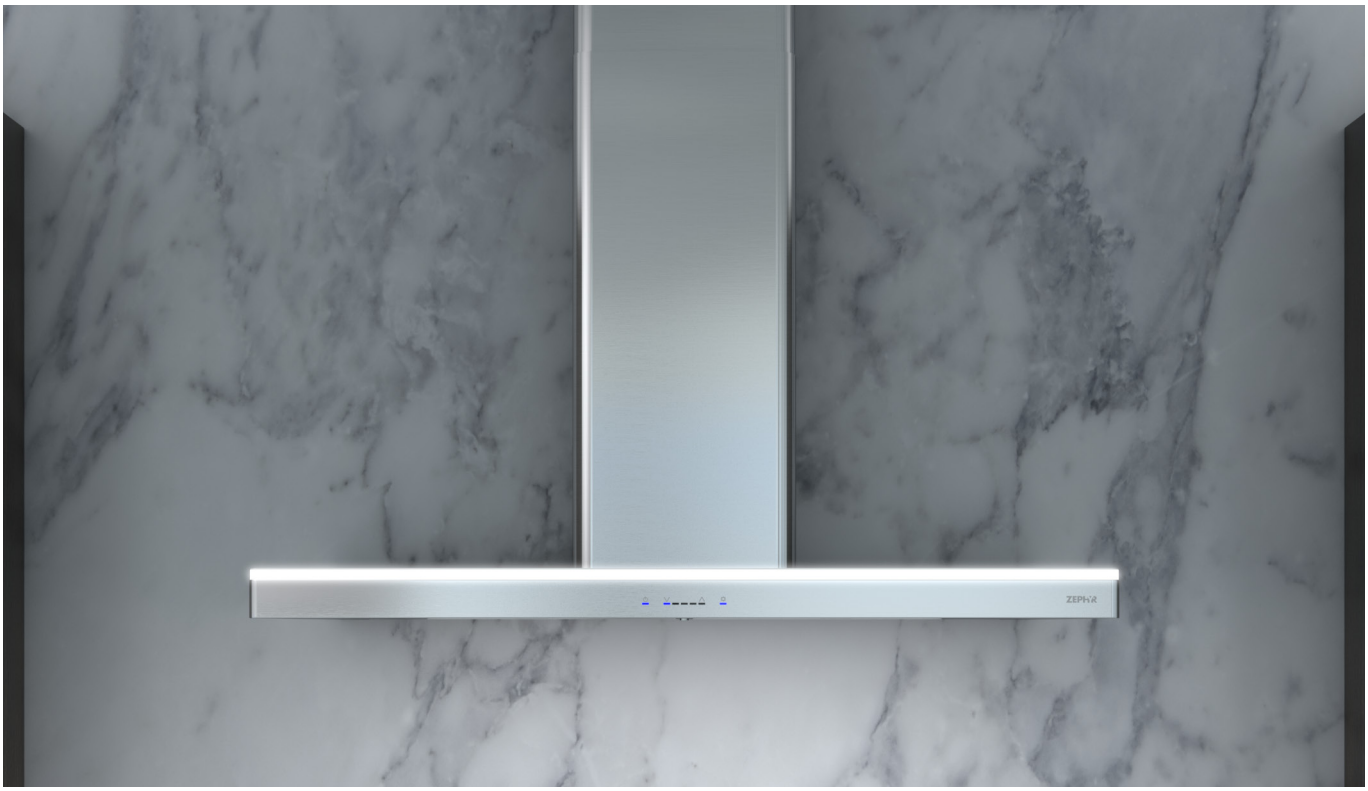

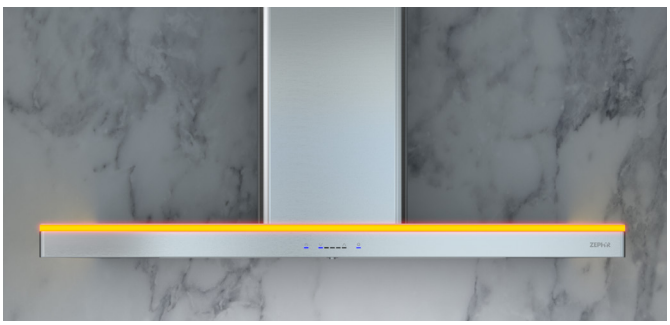


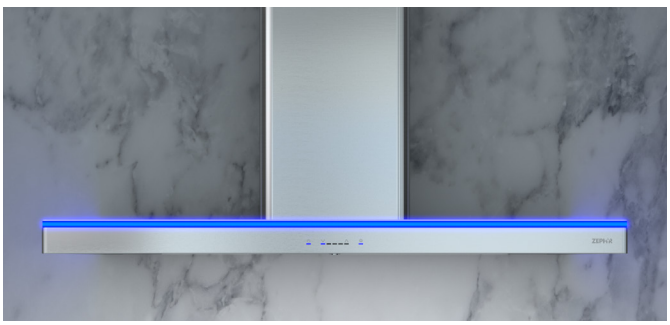


LUCÉ WALL | EUROPA

SIZE	
ZLU-E30AS	30”
ZLU-M90AS	36”
PERFORMANCE	
INTERNAL, MIN.-MAX. BLOWER CFM	200 - 600
INTERNAL, MIN.-MAX. SONES	1 - 6
COLOR	
STAINLESS STEEL	SS
FEATURES	
ACT™	Yes
CONTROLS	ICON Touch™
SPEED LEVELS	5*
5 MINUTE AUTO DELAY-OFF	Yes
LIGHTING	Bloom™ HD LED 6W x 2
DUAL LEVEL LIGHTING	Yes
LED ACCENT LIGHT	Yes; Cloud White, Deep Blue & Amber
FILTERS	Aluminum Mesh x 2
RECIRCULATING OPTION	Yes
EXTENSION DUCT COVER OPTION	Yes, Up to 12’ Ceiling
DUCT SPECIFICATIONS	
VERTICAL - INTERNAL	6” Round
HORIZONTAL - INTERNAL	NA
AC POWER	120V, 60Hz at Max. 3A
OPTIONAL ACCESSORIES	
RECIRCULATING KIT	ZRC-00LU
EXTENSION DUCT COVER	Z1C-00LU
UNIVERSAL MAKE-UP AIR DAMPER	MUA006A
MOUNTING HEIGHT**	26” - 34”
WARRANTY	3 Years Parts, 1 Year Labor


Specifications subject to change, check zephyronline.com for up-to-date information.

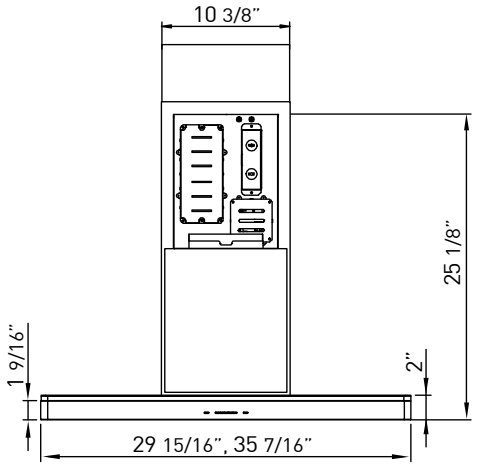

BACK

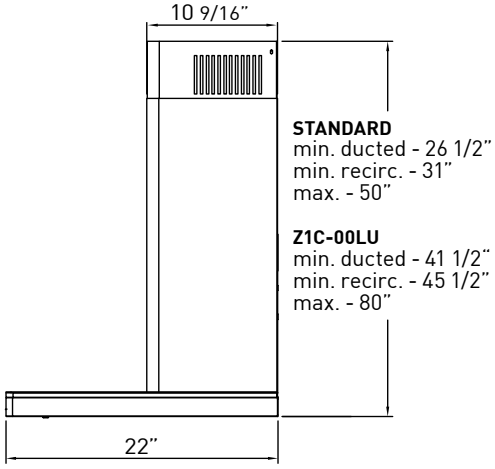

SIDE

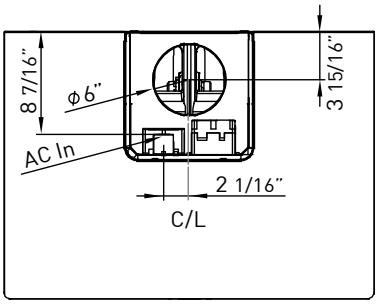

TOP

	CEILING HEIGHT	8’	8.5’	9’	9.5’	10’	10.5’	11’	12’
STANDARD DUCT COVER	Ducted Mounting Height**	26”-33.5”	26”-34”	26”-34”	28”-34”	34”-34”	NA	NA	NA
	Recirc. Mounting Height**	26”-29”	26”-34”	26”-34”	28”-34”	34”-34”	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height**	NA	NA	26”-30.5”	26” - 34”	26”-34”	26”-34”	26”-34”	28”-34”
	Recirc. Mounting Height**	NA	NA	26”-26.5”	26” - 32.5”	26” - 34”	26”-34”	26”-34”	28”-34”

When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.
***Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.*

UNIVERSAL MAKE-UP AIR DAMPER

When range hoods exhaust air out of your home, negative air pressure is created unless the exhausted air is replaced by fresh outdoor air. Zephyr's Universal Make-Up Air Damper is designed to balance the air pressure in your home by automatically opening to allow fresh air in while the range hood is operating.

For use with any Zephyr hood operating over 300 CFM.


MODEL	DAMPER SIZE	CFM LEVEL *of range hood motor*
MUA006A	6" round	up to 600 CFM
MUA008A	8" round	up to 1,000 CFM
MUA010A	10" round	up to 1,200 CFM

FEATURES


- 24 VAC, 60 Hz AC motor
- Meets International Residential Code M1503.4
- Automatically opens when range hood is operating
- Automatically closes when range hood is off
- 24-gauge galvanized steel construction
- Adjustment screw to adjust damper opening

OPTIONAL ACCESSORIES


AK00030	Fresh air inlet cap with screen, 6" round
AK00032	Fresh air inlet cap with screen, 8" round
AK00052	Fresh air inlet cap with screen, 10" round

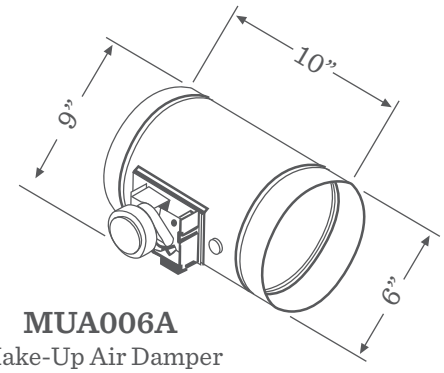

MUA006A
Make-Up Air Damper

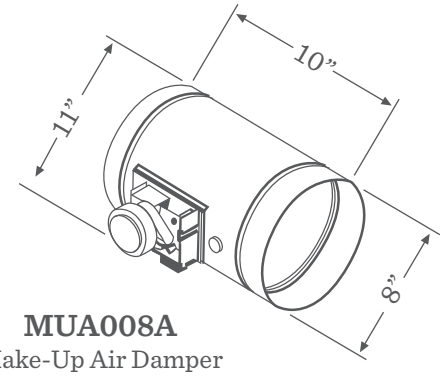


MUA008A
Make-Up Air Damper

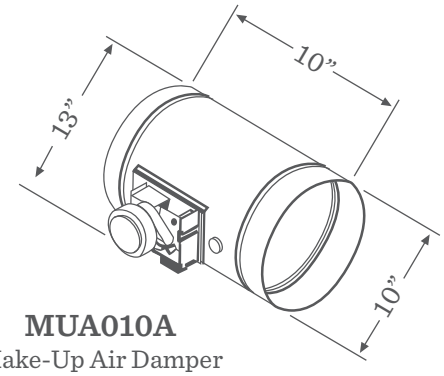


MUA010A
Make-Up Air Damper

Typical Installation

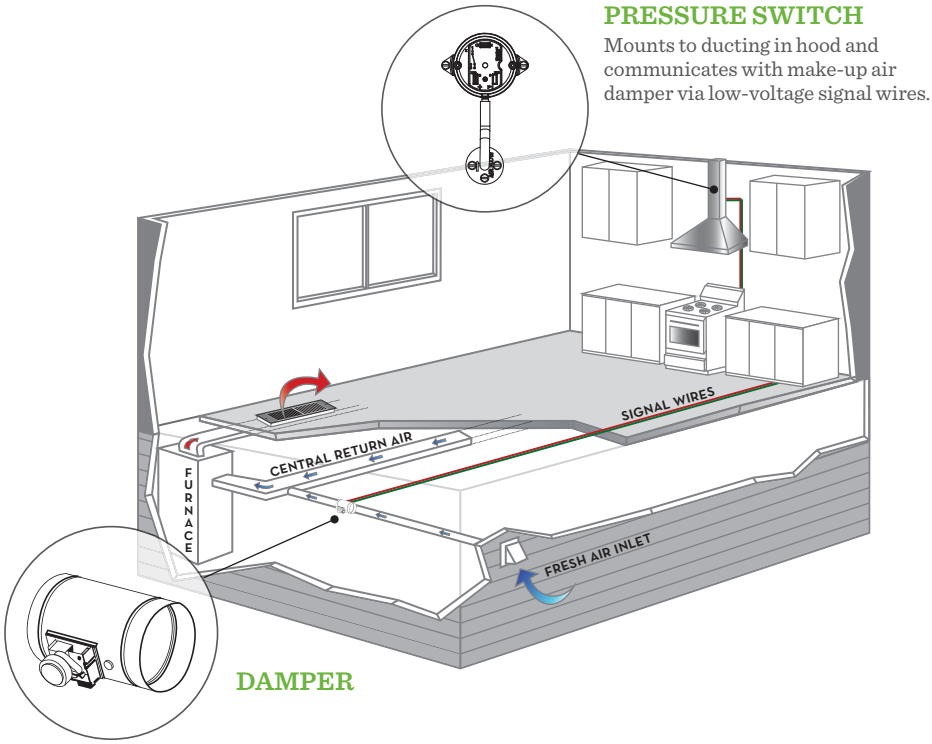


PRESSURE SWITCH
Mounts to ducting in hood and communicates with make-up air damper via low-voltage signal wires.



Transformer
Installs next to damper.
Included with MUA006A, MUA008A & MUA010A

Pressure Switch Components
Included with MUA006A, MUA008A & MUA010A

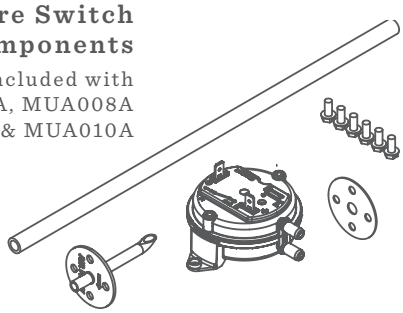

2277 Harbor Bay Pkwy | Alameda, CA 94502 | 888.880.VENT | www.zephyronline.com

ZEPHYR