NZ36K7880US

36" Induction Cooktop

Features

- Power Boost
- WiFi Connectivity
- Bluetooth Connected to Hood
- 15 Power Levels plus Booster
- Simmer
- Melt Setting
- 5 Induction Elements Including 4800W Dual Burner – 7"/11"
- 10.8kW Power
- 2-Stage Residual Heat Indicator

Convenience

- Kitchen Timer
- Child Safety Lock
- Safety Shutoff
- Direct Access
- Quick Stop/Start/Pause Controls
- Demo Mode







Flex Zone

Magnetic Knob

Available Colors



Stainless Steel (shown)



Black Stainless Steel

Signature Features

FLEX ZONE

• Large cooking area designed to adapt to different pot shapes and sizes for optimal flexibility.

DIGITAL-ANALOG CONTROLS

• The ultimate interface, choose between a removable magnetic analog-knob or digital touch controls.

VIRTUAL FLAME™ TECHNOLOGY


• LED Surface lights shine onto pans to give hte visual of gas cooking, with the precision of induction.

NZ36K7880US

36" Induction Cooktop

Installing Your Cooktop

Can be installed over a single oven.

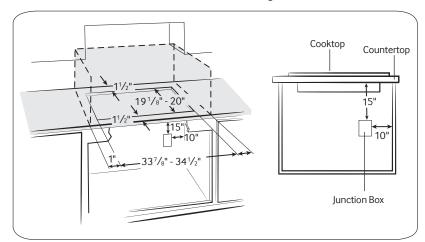

Total Power

10.8kW

Power Source

240V/60Hz/45 Amps

Induction Cooktop

- Left Front: Flex Zone Plus 1800W (Boost 2600W)
- Left Rear: Flex Zone Plus 1800W (Boost 2600W)
- Right Front: 8" (VF VE) 2200W (Boost 3200W)
- Right Rear: 6" (VF VE) 1400W (Boost 1800W)
- Center: 7/11" (VF VE) 3600W (Boost 4800W)
- Flex Zone: 7¹¹/₁₆" x 15³/₄"

Warranty

One (1) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (Max) Cooktop Dimensions:

36" x 4" x 21 1/4"

Cooktop Cutout Dimensions:

33³/₄" x 4" x 19"

Weight: 58.8 lbs.


Shipping Dimensions & Weight (WxHxD)

Dimensions

 $40^{1}/_{6}$ " x $7^{5}/_{16}$ " x 25"

Weight: 69.9 lbs.


(Cooktop	Dimen	sions
,	SOURTOR	Dillici	1310113

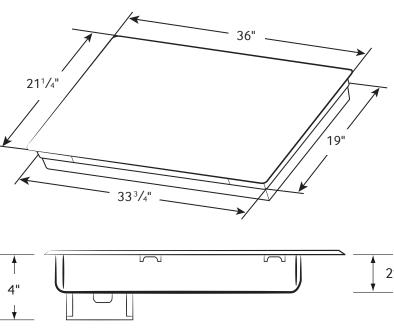

 Color
 Model #
 UPC Code

 Stainless Steel
 NZ36K7880US
 887276183367

 Black Stainless Steel
 NZ36K7880UG
 887276183350



- *See built-in oven installation for complete installation instructions. See label on top of approved built-in oven models.
- ** Refer to installation manual of oven.

Dimensions