


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 8	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 11		



Shown with optional trim kit

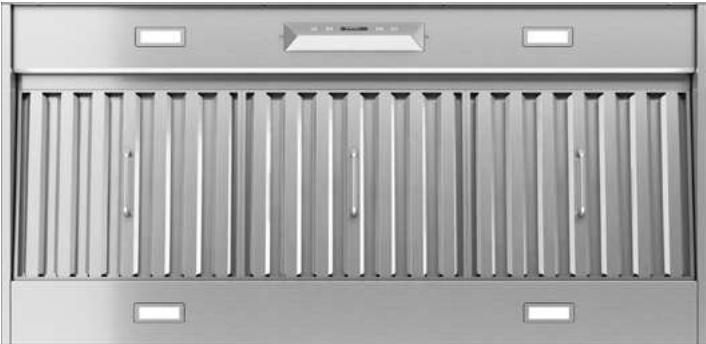

TempGuard™
is a built-in safety feature that senses excessive heat. The fan speed will automatically adjust to high when the internal temperature exceeds 130°F.




TruHue™
A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.




Airflow Control Technology™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.




Optional Trim Kit
Comes included. Install around the perimeter of the insert to hide uneven gaps in the cabinet cutout. More information on page 3.

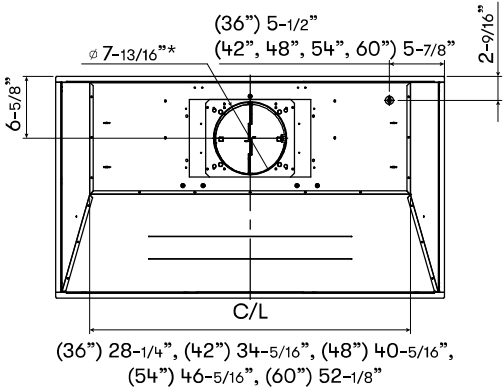


TOP

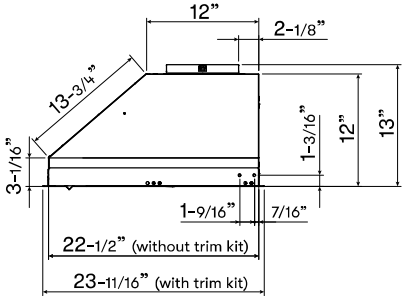

SIDE

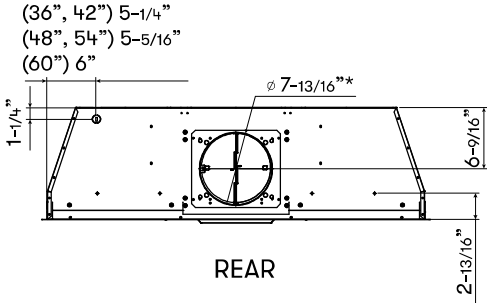

REAR

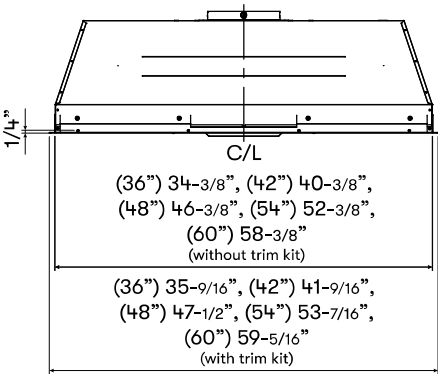


FRONT

*See user manual for 10" round dual blower ducting dimensions

*ACT™ only available with single internal blower
 **When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.
 †TempGuard is a built-in safety feature that turns on the fan if excessive heat is detected
 ‡Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.




CABINET CUT-OUT FOR INSTALLATION WITHOUT TRIM

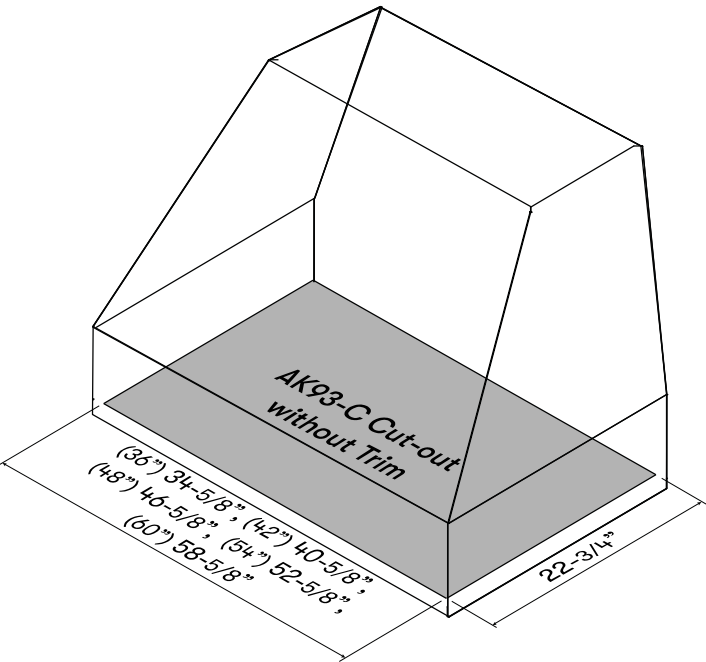


Cabinet Bottom Cut-Out Size (W x D) without trim:

- AK9334CS 34-5/8" x 22-3/4"
- AK9340CS 40-5/8" x 22-3/4"
- AK9346CS 46-5/8" x 22-3/4"
- AK9352CS 52-5/8" x 22-3/4"
- AK9358CS 58-5/8" x 22-3/4"

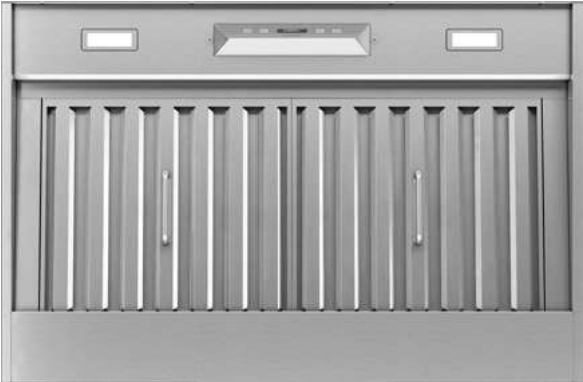

CABINET CUT-OUT FOR INSTALLATION WITH TRIM

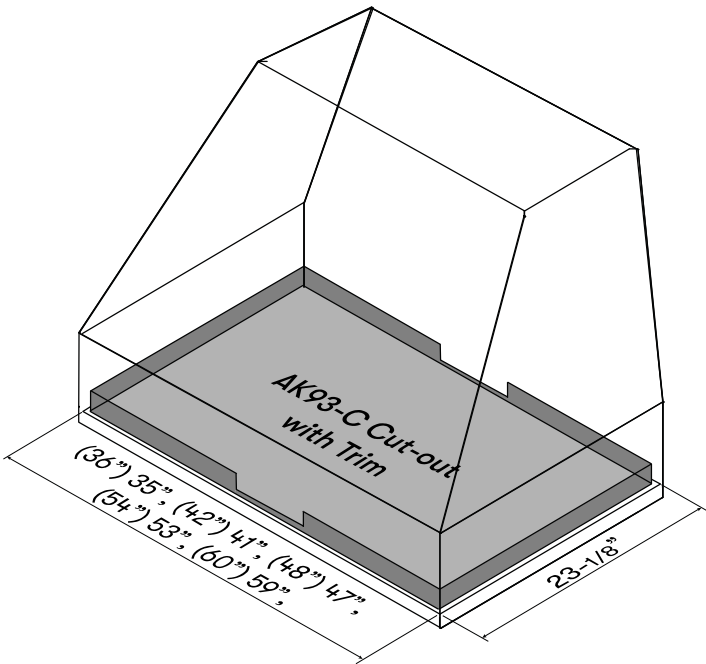

Cabinet Bottom Cut-Out Size (W x D) with trim:

- AK9334CS 35" x 23-1/8"
- AK9340CS 41" x 23-1/8"
- AK9346CS 47" x 23-1/8"
- AK9352CS 54" x 23-1/8"
- AK9358CS 60" x 23-1/8"



Optional Trim Kit

The trim kit consists of four pieces that secure to the front, back, and sides of the insert. The back trim piece will not be used in installations where the insert is installed flush against the wall or if the thickness of the cabinet back panel is less than 1/2".

