## accucold

# AGP34RFLCAL



#### 33.38" x 19" x 19.75" (H x W x D)

General purpose counter height 2-door refrigerator-freezer with digital refrigerator control, internal fan, combination lock, and NIST calibrated alarm/thermometer

#### **Highlights:**

Combination refrigerator-freezer for general purpose storage in facilities

Digital controls allow you easily manage the refrigerator temperature between 2 and  $8^{\circ}C$ 

NIST calibrated thermometer included to help monitor the interior temperature

#### **Product Features:**


Refrigerator-freezer combination	2 to 8°C refrigerator section for basic storage applications, with an upper freezer compartment ideal for ice packs	
Combination lock	Factory-installed front lock secures both compartments with a user-set code. Two keys are included to override the combination as needed	
Digital thermostat (refrigerator)	Easy operation with a factory-installed digital thermostat that allows you to manage the refrigerator temperature between 2 and 8°F (NOTE: the freezer temperature will self-adjust based on the refrigerator setting)	
Alarm/thermometer included	Temperature monitoring device (TMD) displays the current and min/max temperature of the refrigerator interior, with an audible alarm to alert if the unit goes out of range	
Buffered temperature probe	Thermometer probe is encased in a glycol-filled bottle to better simulate the temperature of stored contents instead of refrigerator air temperature	
NIST calibrated external temperature re	adoutThermometer is NIST calibrated in our ISO/IEC 17025:2017 certified laboratory and ships with a 2-year certificate of calibration for your records	
Fan-forced cooling	Refrigerator section includes a factory-installed fan to help ensure a more evenly cooled interior	
Automatic defrost refrigerator	Lower refrigerated section does not require manual defrosting	
SUMMIT APPLIANCE DIVISION, FELIX STO Maguaisoleávostiánsozen vy 10474 USA TEL	DRCH, INC.   ISO 9001:2015 Certified 718-89 Static rading-systems in the up fracter upontpartmenton www.summitappliance.com	

## accucold

### AGP34RFLCAL Specifications:

Overview		
Height of Cabinet	33.0" (84 cm)	
Height to Hinge Cap	33.38" (85 cm)	
Width	19.0" (48 cm)	
Depth	19.75" (50 cm)	
Depth with door at 90°	36.75" (93 cm)	
Capacity	3.2 cu.ft. (91 L)	
Defrost Type	Cycle	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	1.1	
Voltage/Frequency	115 V AC/60 Hz	
Weight	55.0 lbs. (25 kg)	
Shipping Weight	77.0 lbs. (35 kg)	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
UPC	761101086019	
Refrigerator-Freezer		
Door Swing	RHD	
Reversible	Yes	
Adjustable Shelves	Yes	
Interior Light	Yes	
Refrigerator - Interior Height	18.5" (47 cm)	
Refrigerator - Interior Width	15.75" (40 cm)	
Refrigerator - Interior Depth	15.0" (38 cm)	
Refrigerator - Shelf Type	Wire	
Refrigerator - Shelf Qty	2	
Refrigerator - Full Door Shelves	2	
Refrigerator - Temperature Range	2 to 8°C	
Freezer - Interior Height	7.5" (19 cm)	
Freezer - Interior Width	14.0" (36 cm)	
Freezer - Interior Depth	14.0" (36 cm)	
Freezer - Interior Depth Freezer - Full Door Shelves	14.0" (36 cm) 1	

Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	1.16 oz.
High Side PSI	250.0
Low Side PSI	88.0
Level Legs	2
Compressor Step Height	9.0" (23 cm)
Compressor Step Width	15.75" (40 cm)
Compressor Step Depth	5.0" (13 cm)

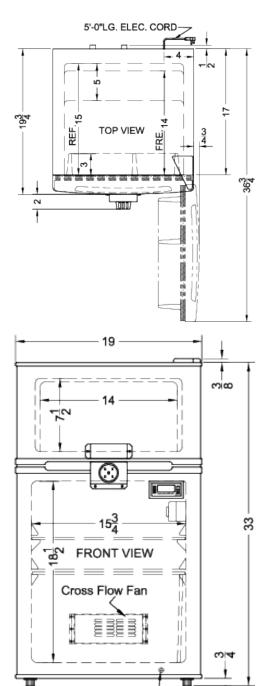



ELEC. CORD