

OCEANAIRE


HA-QC

HA-QC Quick-Connect Hose Adapter Kit


HA-SMQC for OWC1811QC and OWC2412QC Models

HA-LGQC for OWC36*QC and OWC60*QC MODELS (*at Varying Voltages)

The **HA-*QC Hose Adapter Kit** allows for the installation of a QC water cooled unit where the Standard QC Hose Kit cannot accommodate the installation. The kit provides a means of connecting hoses to a QC-Model unit when the water source and drain are located in separate areas, or where longer hose runs are desired. The HA-*QC Hose Adapter is equipped with Quick-Connect Couplings along with the Garden Hose Connections as shown below:

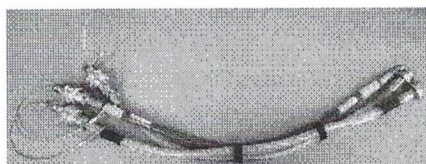

**HA-SMQC
HOSE ADAPTER KIT**


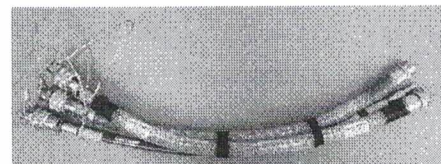


**HA-LGQC
HOSE ADAPTER KIT**


A QC lanyard is supplied with each QC Coupling. When engaged, this device releases the internal valve of the coupling allowing for air to break the vacuum, and drain the hose.

MAXIMUM WORKING PRESSURE FOR WATER LINES: 100 PSIG

FEATURE	WATER-IN HOSE WATER-OUT HOSE	CONDENSATE HOSE (DRAIN)
Material	PVC with Polyester Braid	Gray PVC with Polyester Braid
ID, Wall Thickness	SM - 3/8 ID, 0.219 Wall LG - 3/4 ID, 0.266 Wall	3/8 ID, 0.219 Wall

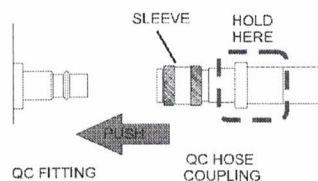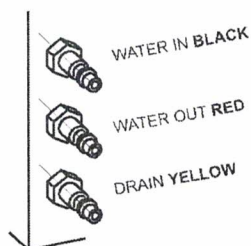

TO CONNECT
Firmly Push the Coupling onto the Fitting, until you hear a "click".



TO RELEASE
Push the sleeve toward the Fitting. It will spring back when released.

ADAPTER MODEL	For Use With	UNIT SIDE FITTINGS				TERMINATION FITTINGS		
		WATER IN	WATER OUT	DRAIN	LENGTH	WATER SUPPLY	WATER OUT	DRAIN
HA-SMQC	OWC1811QC	3/8 QC	3/8 QC	1/4 QC	2 ft.	3/4 Female	3/4 Male	3/8 Hose
	OWC2412QC	Coupling	Coupling	Coupling		Garden Hose	Garden Hose	Barb
HA-LGQC	OWC36QC*	3/4 QC	3/4 QC	3/8 QC	2 ft.	3/4 Female	3/4 Male	3/8 Hose
	OWC60QC*	Coupling	Coupling	Coupling		Garden Hose	Garden Hose	Barb

* Models of Varying Voltage

OCEANAIRE

1731 Wall Street, Suite 100 Mount Prospect, IL 60056

Phone: (847) 583-0311

Fax: (847) 583-0312

www.oceanaire-inc.com

OA-IN-HAQC 03122025