



Classic 18" Pro-style for wall mount applications.

Exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 13 Internal or

External blower options offered separately.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow™ baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

**Model Numbers:**

- WP28M30SB      WP28M42SB      WP28M54SB
- WP28M36SB      WP28M48SB      WP28M60SB



Variable speed control with last setting memory.



Halogen lamps brilliantly illuminate the cooktop.



Hi-Flow™ baffle filters utilize a V-mesh & baffle design to increase airflow, lower sound levels and provide excellent ventilation efficiency.



**Hood Sizes**

**Widths**      30", 36", 42", 48", 54", 60"  
**Depth**      24"

Must purchase blower separately.

**Finish**

Stocked      Brushed Stainless Steel  
 Special Order      Not Available

**Features**

Lighting Type      Halogen, GU10, MR16, 50-watt  
 Number of Lamps      2 on 30", 36" | 4 on 42", 48", 54", 60"  
 Lighting Levels      2  
 Lighting Lamps Included      Yes  
 Control Type      Variable Speed Rotary with Last Setting Memory  
 Control Features      Heat Sentry™  
 Remote Control      Not Available  
 Filter Type      Hi-Flow™ Baffle Filter  
 Non-ducted Capability      No

**Hood Blower Options** (Must choose one blower sold separately)


Internal	iQ6	iQ12	P3	P6	P12
Blower CFM	600	1200	300	600	1200
Sones Low/High	0.3/7.5	0.3/10.5	0.3/3.5	2.0/9.5	2.25/12.0
External In-line	ILB3	ILB6	ILB9	ILB11	
Max CFM	280	600	800	1100	
Sone levels are typically half of comparable CFM internal blowers.					
External Exterior	EB6	EB9	EB12	EB15	
Max CFM	600	900	1200	1500	
Sone levels are typically half of comparable CFM internal blowers.					

**Accessories**

Decorative Soffit Flue      AEWP28302SB, AEWP28362SB, AEWP28422SB, AEWP28482SB, AEWP28542SB, AEWP28602SB  
 Backsplashes      RMP3604, RMP4204, RMP6004  
 Universal MUA Damper      MD6TU, MD8TU, MD10TU

**Installation Requirements**

Amps @ 120V      8.5 Max  
 Electrical      Direct Wire  
 Duct Size: Internal Blower      8" (iQ6, P3, P6) 10" (iQ12, P12)  
 Duct Size: External Blower      10" (at hood)  
 Duct Direction      Vertical and Horizontal  
 Backdraft Damper      Refer to Blower

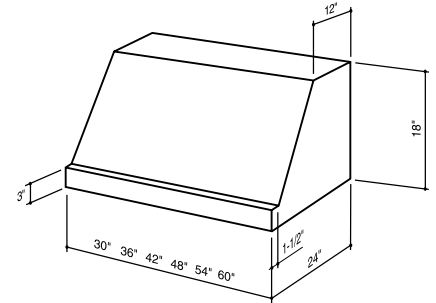

Installation height above the cooking surface: 24"-36"

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)

**AEWP Decorative Soffit Flue**

A soffit flue is available in brushed stainless steel, and attaches to the top of the range hood shell. It is available in all hood widths in 12" height only.

