

Broan brings you Spire, an exciting new shape in a pro-style hood. The new design incorporates modern features like the quiet Captur™ system and LED lighting.

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	BPDP130SS	HPFA424 (Type "B5")	HPF24 (Type "Xb")
36 in.	BPDP136SS	HPFA430 (Type "C5")	HPF30 (Type "Xc")
42 in.	BPDP142SS	HPFA436 (Type "D5")	HPF36 (Type "Xd")
48 in.	BPDP148SS	HPFA442 (Type "E5")	HPF42 (Type "Xe")

HVI PERFORMANCE								
Duct Orientation	Size	Damper	Sones		CFM			
			Normal	High	Normal	High 0.25 in. w.g.	High 0.1 in. w.g.	
Vertical - Rectangular	3¼ in. x 10 in.	Included	0.7	6.0	150	310	360	
Horizontal - Rectangular	3¼ in. x 10 in.	Included	0.7	5.5	150	340	400	
Round - Vertical	7 in.	Sold Separately	0.4	5.5	150	330	380	

FEATURES	
Max. Blower Airflow	450 CFM
Control type	2-speed Deluxe Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	1-level LED (included)
Grease Filters	Hybrid Baffle (Qty. 2)
Installation Hardware	EZ1 brackets
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately



AC INPUT	
120 V, 60 Hz - 1.4 AMPS	

OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
Make-up Air Dampers	MD6TU, MD8TU and MD10TU

MOUNTING HEIGHT	
18 in. to 30 in. from cooktop to bottom of hood	

LIMITED WARRANTY	
1-year	
3-year (LED modules only)	
(See installation manual for full warranty text.)	

**FOR INDOOR USE ONLY**

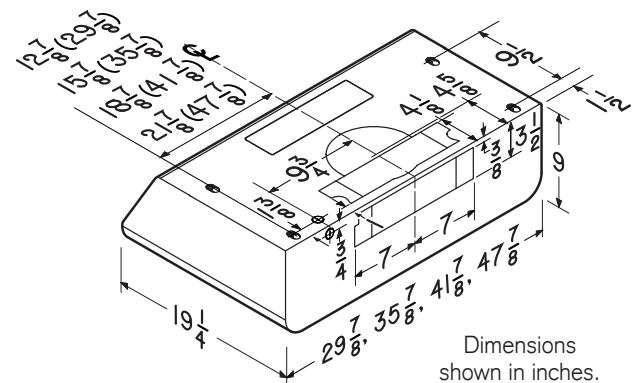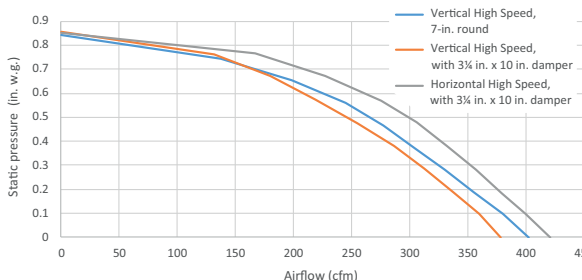

Dimensions shown in inches.

SPECIFICATION SHEET  
**SPIRE - BPDP1 SERIES**



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.