




NEW
Art-Cool™ Premier

THERE CAN ONLY BE ONE INDUSTRY LEADER.

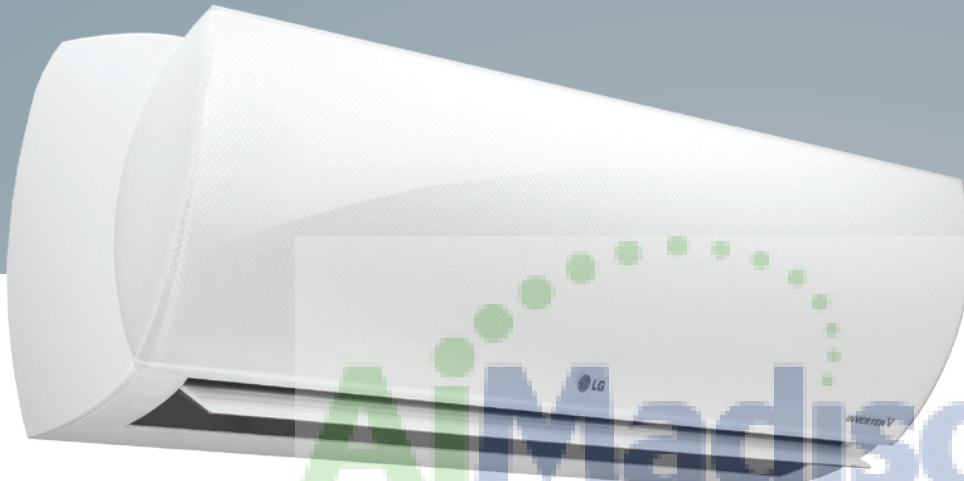

AjMadison
Your Appliance Authority™
800-570-3355

It's LG.

- Up to 28.0 SEER Rating. **Highest in the Industry.***
- Ultra-Quiet 17dB(A) Sound Level (Sleep Mode)
- Revolutionary Inverter Technology
- Larger Cross-Flow Fan & Enhanced Outlet-Increases Airflow by 29%
- 4-way Swing Disperses Air Quickly
- Choose from 9,000 & 12,000 BTU Models
- Stylish Design
- Quick & Easy Installation



BLDC Motor / Cross-Flow Fan



up to 28.0 SEER



To find out more, visit lg-dfs.com

*AHRI Standard 210/240-2008 Certificate Date 4-27-12. © 2012 LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. LG Life's Good is a registered trademark of LG Corporation.

High Wall Duct-Free Art Cool™ Premier Supreme Efficiency Single Zone

9,000 BTUs / 12,000 BTUs

LS090HYV (H/P Model)

C 9,000 BTUs Cooling

H 11,000 BTUs Heating

LS120HYV (H/P Model)

C 12,000 BTUs Cooling

H 13,600 BTUs Heating



INVERTER V

FEATURES:

- Inverter (Variable speed compressor)
- Energy saving
- R410A refrigerant
- Gold Fin™ anti-corrosion
- Self-cleaning indoor coil
- Cooling/Heating/Fan mode
- Jet cool/Jet heat
- Chaos wind
- 4-Way auto swing

- Ultra quiet operation
- Sleep mode
- Dehumidifying mode
- Auto restart
- Auto changeover
- Built-in low ambient standard, down to 14°F (Cooling mode)
- 24-Hour on/off timer
- Condensate sensor connection

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Remote control, batteries, holder & holder hardware
- Installation manual
- Optional accessories
 - Model#: PQRCVSL0(QW) (Wired wall thermostat)
 - Model#: PMNFP14A0 (PI485 V-net interface)

Exterior Unit Includes:

- Exterior unit
- Exterior unit has sufficient refrigerant for charging indoor coil and a 25' line set (Line set not included)

ETL# : 3091879

* Specification can be changed without notification

System Model #	LS090HYV	LS120HYV
Indoor Model #	LSN090HYV	LSN120HYV
Outdoor Model #	LSU090HYV	LSU120HYV
Performance		
Capacity (BTUs)	C 9,000 H 11,000	C 12,000 H 13,600
EER	16.4	14.1
SEER	28.0	26.0
HSPF	12.0	11.5
Air Circulation (CFM H/M/L)	512 / 406 / 300	512 / 406 / 300
Fan Speeds	6/Auto/Chaos	6/Auto/Chaos
Dehumidification (pts/hr)	3.3	3.7
Indoor dB(A)*	39/34/26/17	39/34/26/17
Outdoor dB(A)*	51	51
Electrical		
Rated Voltage Outdoor	230/208-60-1	230/208-60-1
Rated Voltage Indoor	230/208-60-1	230/208-60-1
Indoor Dimensions		
W x H x D (inches)	34 3/8 x 11 5/8 x 9 1/4	34 3/8 x 11 5/8 x 9 1/4
Weight (lbs.)	25.3	25.3
Outdoor Dimensions		
W x H x D (inches)	34 1/4 x 25 13/16 x 12 5/8	34 1/4 x 25 13/16 x 12 5/8
Weight (lbs.)	94.8	94.8
Thermostat Range		
Cooling / Heating (°F)	64-86/60-86	64-86/60-86

*LG verified sound ratings

Warranty: 3 years parts; 5 years compressor.