
# **Vent A Hood** SPECIFICATION SHEET

MODELS: DA18, DAH18 Flairline, PWV18, PWVH18 Slopeline, SL18, SLH18, SLX18, SLXH18 Emerald, XR18, XRH18 Excalibur Note: "H" in part number indicates halogen lighting.

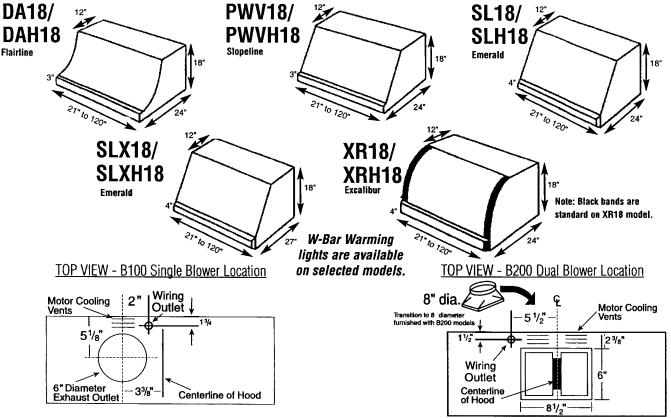


## **ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNITS**

Model	Motor	Туре	Volts	Amps	HZ	RPM	CFM SP@.0"	Equivalent CFM	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Square Inches
B100 Single	1/25	Shaded Pole	115	1.7•	60	1550	300	450	286	270	240	6" (or equivalent)	28
B200 Dual	(2) 1/25	(2) Shaded Pole	115	3.4●	60	1550	600	900	572	540	480	8" (or equivalent)	50

• Note: Add 2.5 amps for each warming light and 1.0 additional amp for each halogen bulb. Equivalent CFM explained in the checklist on page 19 of literature. Lighting: Hood is available with fluorescent light (1 for each single or dual blower) or with

halogen lights - 24" to 41" - 2 lights, 42" to 53" - 3 lights, 54" to 66" - 4 lights, 66" + 1 light for each 16" of width.


#### EP Transition — Available for Multiple Blower Application at Additional Charge This will "Center" 10" or 12" Duct on Top of Hood.

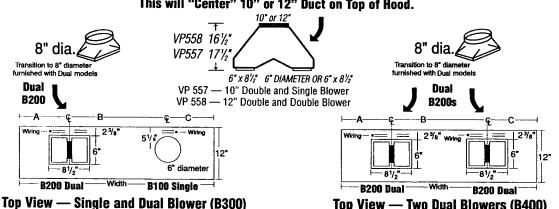

Blowers are spaced 14 %" center to center on the top of the hood. To find the centerlines of each duct opening, find the center of the top of the hood, and measure 7 %" to the left, and 7 %" to the right. Only available on hoods 42" to 66" wide.

### Top View — Two Dual Blowers (B400) Blowers are spaced 22" center to center on the top

of the hood. To find the centerlines of each duct opening, find the center of the top of the hood, and measure 11" to the left, and 11" to the right. Only available on hoods 48" to 66" wide.



For hoods greater than 66" in width, ask for blower locations.