

36" EVOQUE INDUCTION RANGE

EVOQUE 400 SERIES



MODEL CODE



F4EIR365CS1-**



- Easy clean ceramic glass
- Power boost burner
- Pan detection system
- Residual heat sensor

- Dual true convection
- Soft closing door
- Self clean oven
- Multi-level cooking
- 1 Telescopic rack
- Cool touch door
- Digital controls
- Meat probe
- Fast pre-heat



F4EIR365CS1-BK
GLOSSY BLACK RAL 9004



F4EIR365CS1-IV
GLOSSY IVORY RAL 1013



F4EIR365CS1-WH
GLOSS WHITE RAL 9016



F4EIR365CS1-SS
STAINLESS STEEL



F4EIR365CS1-MB
MATTE BLACK RAL 9004



F4EIR365CS1-MI
MATTE IVORY RAL 1013



F4EIR365CS1-MW
MATTE WHITE RAL 9016



F4EIR365CS1-RAL
RAL CODE

DESCRIPTION

The Evoque 36" induction range draws inspiration from a time when ranges were crafted not only for function, but as expressions of Italian artistry and design heritage. Conceived as a distinctive statement piece, Evoque seamlessly blends the elegance and influence of the Italian Renaissance with the high-performance features North American consumers expect from a professional-style range. Each Evoque range is meticulously handcrafted in Italy's Veneto region, using only the finest materials to ensure a balance of timeless design, exceptional craftsmanship, and modern-day precision. Finished with a refined Chrome and Brushed Stainless metal finish, the Evoque range is offered in a selection of standard colors or can be custom ordered in any RAL color to suit your personal style.

SPECIFICATIONS

COOKING SURFACE

4 Single Induction cooking zones
1 Max power with Ø 11" cooking zone
Elegant ceramic glass surface
Premium induction technology for unsurpassed performance
Booster function for each cooking zone
Residual heat and power-on Indicators
Melting and simmering function
Digital minute minder
Child lock function
Failure codes indication
Automatic heat-up time

OVEN

Dual true convection
Self-cleaning + multi-baking (main oven)
Black porcelain enamel interior
Cool touch, soft-closing doors
Extra-large cavity and viewing area
3 Halogen lights for flawless visibility
Total capacity 5.20 cu. ft.
2 chrome racks
1 telescopic rack
Enameled broiler pan

OVEN FUNCTIONS


Bake
Broil
Roast
Convection
True Convection
Warm / Proof / Dehydrate
Electronic cooking programmer
Meat probe
Self-clean
Sabbath mode

OPTIONAL ACCESSORIES

F6BG36STD	Standard trim
F6BG36HBT	High back trim
F6BG36BCI	Island trim
INDUKIT4	Induction plate adapters
FMTRP36	Telescopic rack

EVOQUE 400 SERIES

36" INDUCTION RANGE

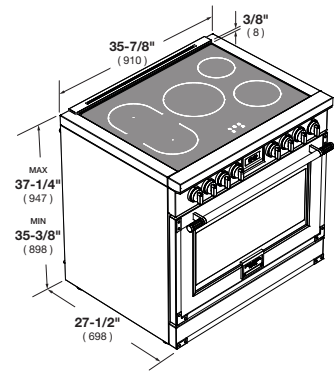

MODEL CODE		F4EIR365CS1--**			
Series		36" Evoque - Induction			
COOKTOP					
Control Type		8 Heavy Duty Knobs			
Oven Programming		Electronic with 6 Touch Keys			
Display: Clock - Temperature - Function		White LED			
Language		English			
COOKTOP					
Type		INDUCTION			
Cooking Surface		Ceramic Glass			
Knobs		•			
INDUCTION SPECIAL FEATURES		BASIC 4			
		Pot Detection System		Child lock function	
		Cooling fan system		Failure Codes indication	
INDUCTION CONTROL FEATURES					
		Knob for power setting (illuminated)		Power levels 1 to 9	
		Digital display for power level indication		Booster/Fast boil function for each zone	
		Heat up time automatic		Minute minder	
		Residual heat indication			
COOKING ZONE		5			
Front Left	Octa Inductor	8-1/4"x7-1/2"	210 x 190 mm	Power L9 - 2100 W	Booster - 3000 W
Rear Left	Octa Inductor	8-1/4"x7-1/2"	210 x 190 mm	Power L9 - 2100 W	Booster - 3000 W
Front Right	Inductor	8"	200 mm	Power L9 - 2300 W	Booster - 3000 W
Rear Right	Inductor	6,5"	160 mm	Power L9 - 1400 W	Booster - 2100 W
Middle	Inductor	10"	250 mm	Power L9 - 2300 W	Booster - 3000 W
OVEN					
Type / Oven Type		Electric Piro / Multifunction 2 Fans (True Euro Conv.)			
Temperature Regulation		Electronic Control			
OVEN FUNCTIONS					
		Pyrolitic Self-Clean with automatic door latch		Bake	
		True European Convection Bake (Multi-level)		Broil	
		Convection Broil		Thaw (Defrost)	
		Convection Roast		Oven Lights	
ELECTRIC OVEN FEATURES					
		Preheat bar (25%, 50%, 75%, 100%)		Hours clock format AM / PM	
		Sabbath mod		°F-°C degree unit	
OVEN DOOR(S)					
Oven Glass Window		Deep Embossed Window			
Door Cooling System		4 Pane Heat Resistant Glass			
Soft closing system		•			
Handle style (30mm Ø)		Removable metal end cap			
OVEN CAVITY					
Net Capacity (cbft)		5.7			
Internal Width		28" 7/8 (734 mm)			
Internal Depth		15" 3/4 (400 mm)			
Cavity Enameling Colour		Black			
Rack Positions		6			
Oven Lights		3 x 20W Halogen			
HEATING ELEMENTS 240V, 60HZ					
Broil Upper Heating Element		3100 W	(240 V)		
Upper Auxiliary Element Wattage		1032 W	(240 V)		
Concealed Bake Lower Heating Element		1400 + 600 W	(240 V)		
Convection Element		2 x 1300 W	(240 V)		
OVEN ACCESSORIES					
		2 Chrome Racks		1 Telescopic Chrome Rack	
		1 Enameled Broiler Pan (basin + anti splash)		Meat probe	
DIMENSIONS/WEIGHT					
Overall Width		35 - 3/4"	910 mm		
Overall Height (min.-max.)		39"	993 mm		
Overall dim - Depth		29 - 3/4"	756 mm		
Gross Weight Net Weight		148 kg - 326 lb	128 kg - 282 lb		
POWER / RATINGS (208/240 V, 60 Hz)					
kW / Amps rating at 120-240 V, 60 Hz		14.6kW - 61,0 A			
kW / Amps rating at 120-208 V, 60 Hz		13.3kW - 63,0 A			
Power Cable Cable length		Nema 14-50P 59 1/16" (1500mm)			
INSTRUCTIONS FOR USE					
Use & Care Manual - Installation Manual		EN, SP, FR			