


INCA HC INSERT RANGE HOOD



AN UPDATED VERSION OF THE CLASSIC FABER INSERT HOOD. The updated 600 and 400 CFM Inca HC by Faber features new advanced electronic controls, an optional remote control and two level halogen lights. The new Inca HC has stainless covered mesh dishwasher safe grease filters and has the ability to vent up or to the back to minimize duct work and maximize power. Now also available in 400 CFM for make up air compliance (**check local codes**)

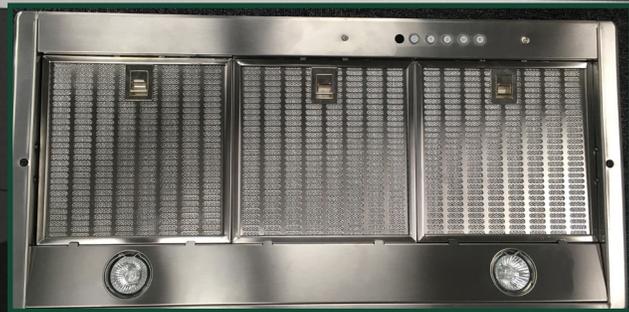

AVAILABLE MODELS

Model #	Size / Color	Motor Class (CFM)	Sound Levels (sones)
INHC29SS600-B	29 Stainless	600 CFM	2.8 - 7.5 sones
INHC29SS400	29 Stainless	400 CFM	1.0- 6.6 sones

NEW MODEL

KEY FEATURES



Backlit electronic controls
Backlit electronic controls with a White LED light to indicate the current speed and two level lighting



VariDuct System
Top and Rear Direct Venting
Easy kitchen integration with top and direct rear venting and recirculation options.



Remote Control (optional)
Control all features of the hood from the convenience of a wireless remote control (sold separately)



Easy Snap Mounting Clips
Installation with easy built-in adjustable clips that tighten onto the sides of the cabinet floor


INCA HC INSERT RANGE HOOD




SPECIFICATIONS

cut out dimensions	27 5/8" w x 13 9/16" d
convertible to ductless / recirculating	yes – purchase separately
controls	4 speed electronic w/ white led
lighting	2 x 35 (w) halogen - two level
ducting top / direct rear vent (Vari-Duct)	Yes - 6" round top or back
grease filters	dishwasher safe stainless mesh
10 minute intensive speed	yes
make up air compliant *	yes - 400 cfm version option
15 minute auto shut off	yes
ADA compliant	yes (with remote control purchase)
power cord included	yes
AC power	400 watts / 3.2 amps


DIMENSIONS

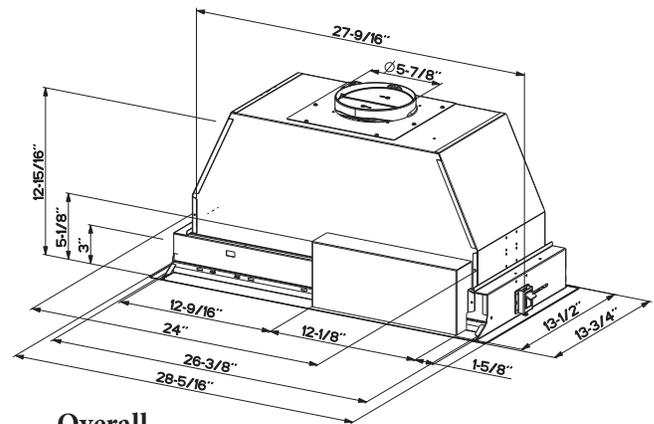


Overall

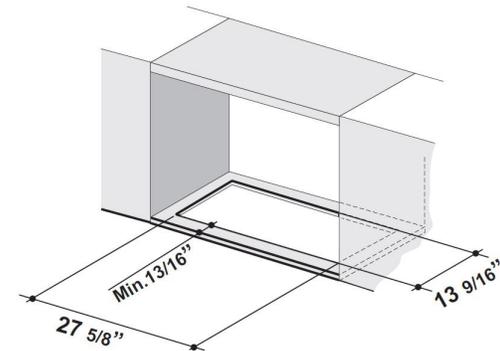

Cut Out

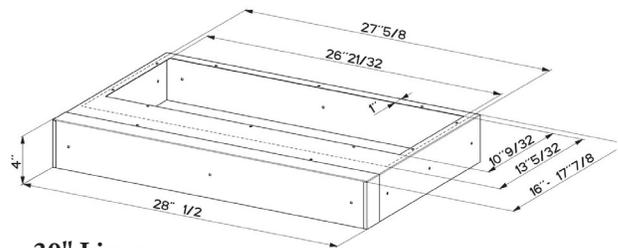

30" Liner

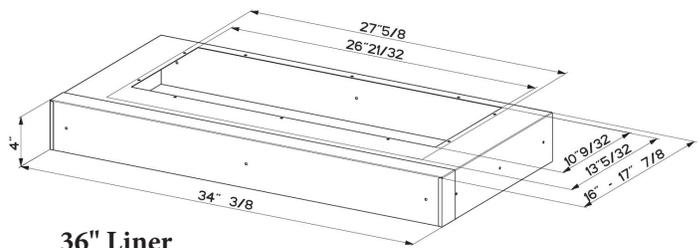

36" Liner

PERFORMANCE (600 CFM)

SPEED	1	2	3	BOOST
CFM	150	300	450	560
Sones	2.8	4.3	6.0	7.5

ACCESSORIES

CFMRED2

CFM Reducer Kit*

For use in make up air environments where an under 400 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm from 400 to under 300.

FILTER1 –

Charcoal Filter Kit

High quality charcoal filter for use when recirculating the air back into the kitchen. Filters out odor and should be replaced every 6 months.

FILTER1LL –

Long Lasting Charcoal Filter Kit

New washable charcoal filter can be recharged and washed up to 8 times. For use when recirculating the air back into the kitchen. Filters out odor and can last up to 4 years.

LINE30ST / LINE36ST –

Stainless Steel Liner 30 & 36"

Create a perfectly-sealed, non-combustible 4" tall perimeter to "line" the wood below the hood. Depth adjustable from 16" - 17 7/8".

REMCTRL –

Remote Control

Control all features of the hood from the convenience of a wireless remote control.

WIREBOX –

Fixed Wiring Box

Replace the power cord with a hard wired box to power the range hood.

MUDAMPER6 / MUDAMPER8 –

Universal Make-Up Air Damper

Satisfies make-up air requirements, this kit uses an air switch to activate the make-up air damper to open and bring fresh air into the home when the hood fan is on. It then closes tightly when the hood is off. The CFM level is not reduced with this accessory.



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this range hood. * Check local make up air codes for guidelines.



Imagined in Italy