

SBC635MBINK

33.5" x 24.0" x 25.38" (H x W x D)

Built-in beer dispenser in black, auto defrost w/digital thermostat; sold without tap kit for do-it-yourselfers who install their own systems

Highlights:

- Allows you to install your own custom tapping equipment
- Full-sized capacity to hold half, quarter, 1/6 or mini kegs
- Designed for built-in installation under the counter
- Digital thermostat lets you set the perfect temperature for any brew




| | |
|-------------------------------------|---|
| Full-sized beer dispenser | Large 5.6 cu.ft. interior can accept a full half barrel keg, two 1/6 barrel kegs, or a pony keg |
| Built-in capable | Make the best use of space by installing your appliance under the counter; NOTE: if installing flush with wall or cabinets, unit will require extra space due to the door design. Width should be 25" to 25 1/4". For more information, see the user manual |
| NO TAP KIT | Install your own tapping equipment for a customized beer cooler |
| Digital thermostat | Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit |
| Ideal beer temperature | Operates between 33° and 50°F to keep a variety of beers stored at just the right serving temperature |
| Automatic defrost | Reduced maintenance with auto defrost system |
| Reversible door | User-reversible door swing for added flexibility |
| Fully finished black cabinet | Allows the unit to be used freestanding |
| Casters included (ship unassembled) | To make the beer dispenser portable, install this set of 2 1/2" high locking casters |

Top guard rail
(ships
unassembled)

Attractive chrome guard rail helps to reduce spills and neaten service

SBC635MBINK Specifications:

| | |
|----------------------------|----------------|
| Height | 33.5" |
| Width | 24.0" |
| Depth | 25.38" |
| Capacity | 5.6 cu.ft. |
| Interior Height 1 | 28.0" |
| Interior Width 1 | 20.5" |
| Interior Depth 1 | 19.0" |
| Comp Step Height | 8.25" |
| Shipping Weight | 130.0 lbs. |
| Weight | 100.0 lbs. |
| Voltage/Frequency | 115 V AC/60 Hz |
| Canadian Electrical Safety | ULC |
| US Electrical Safety | UL |
| Amps | 0.86 |
| Energy Usage/Year | 310.0 kWh/year |
| Reversible | Yes |
| Door Swing | RHD |
| Wheel Quantity | 4 |
| Temperature Range | 33 |
| Defrost Type | Automatic |
| Depth with door at 90° | 47.0" |
| Thermostat Type | Digital |
| Fan Type | Exterior |
| Refrigerant Type | R600a |
| High Side PSI | 250.0 |
| Freon Oz | 1.13 |
| Low Side PSI | 110.0 |
| Compressor Warranty | 5 Years |
| Parts/Labor Warranty | 1 Year |

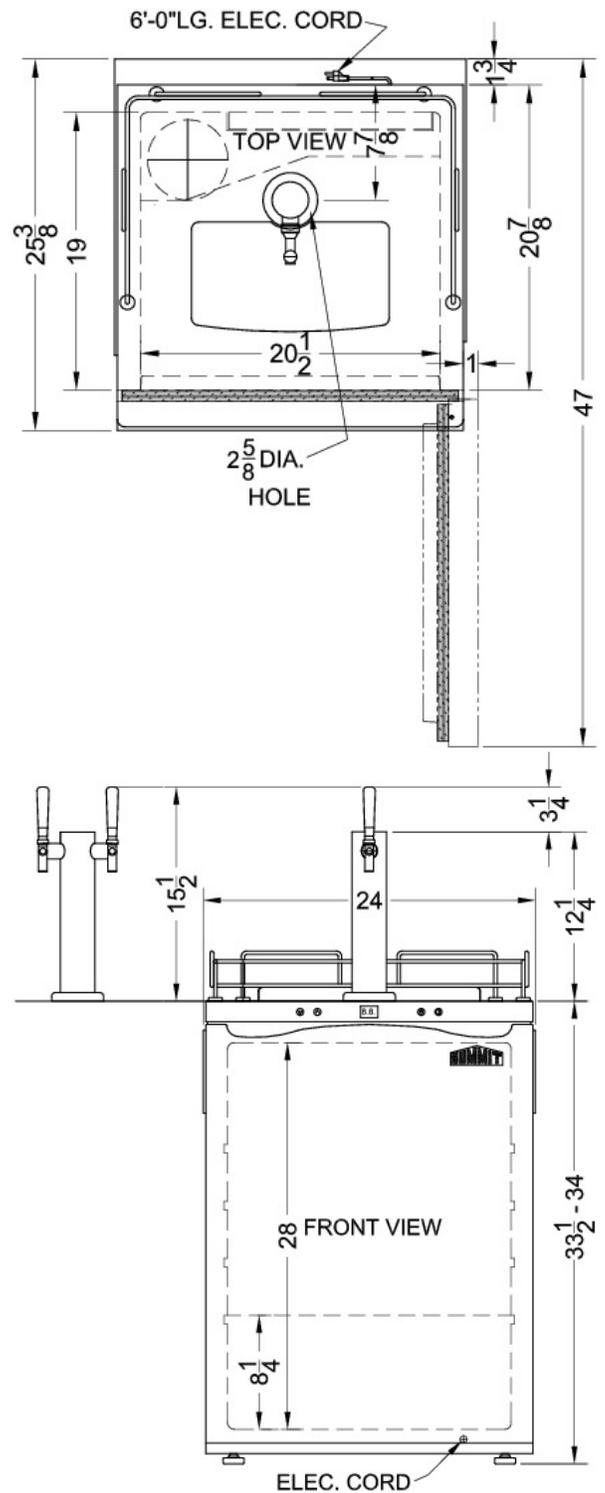

Summit Appliance Division, Felix Storch, Inc.
 770 Garrison Ave • Bronx, NY 10474
 Phone: 718-893-3900 • Fax: 718-842-3093
 Email: info@summitappliance.com